




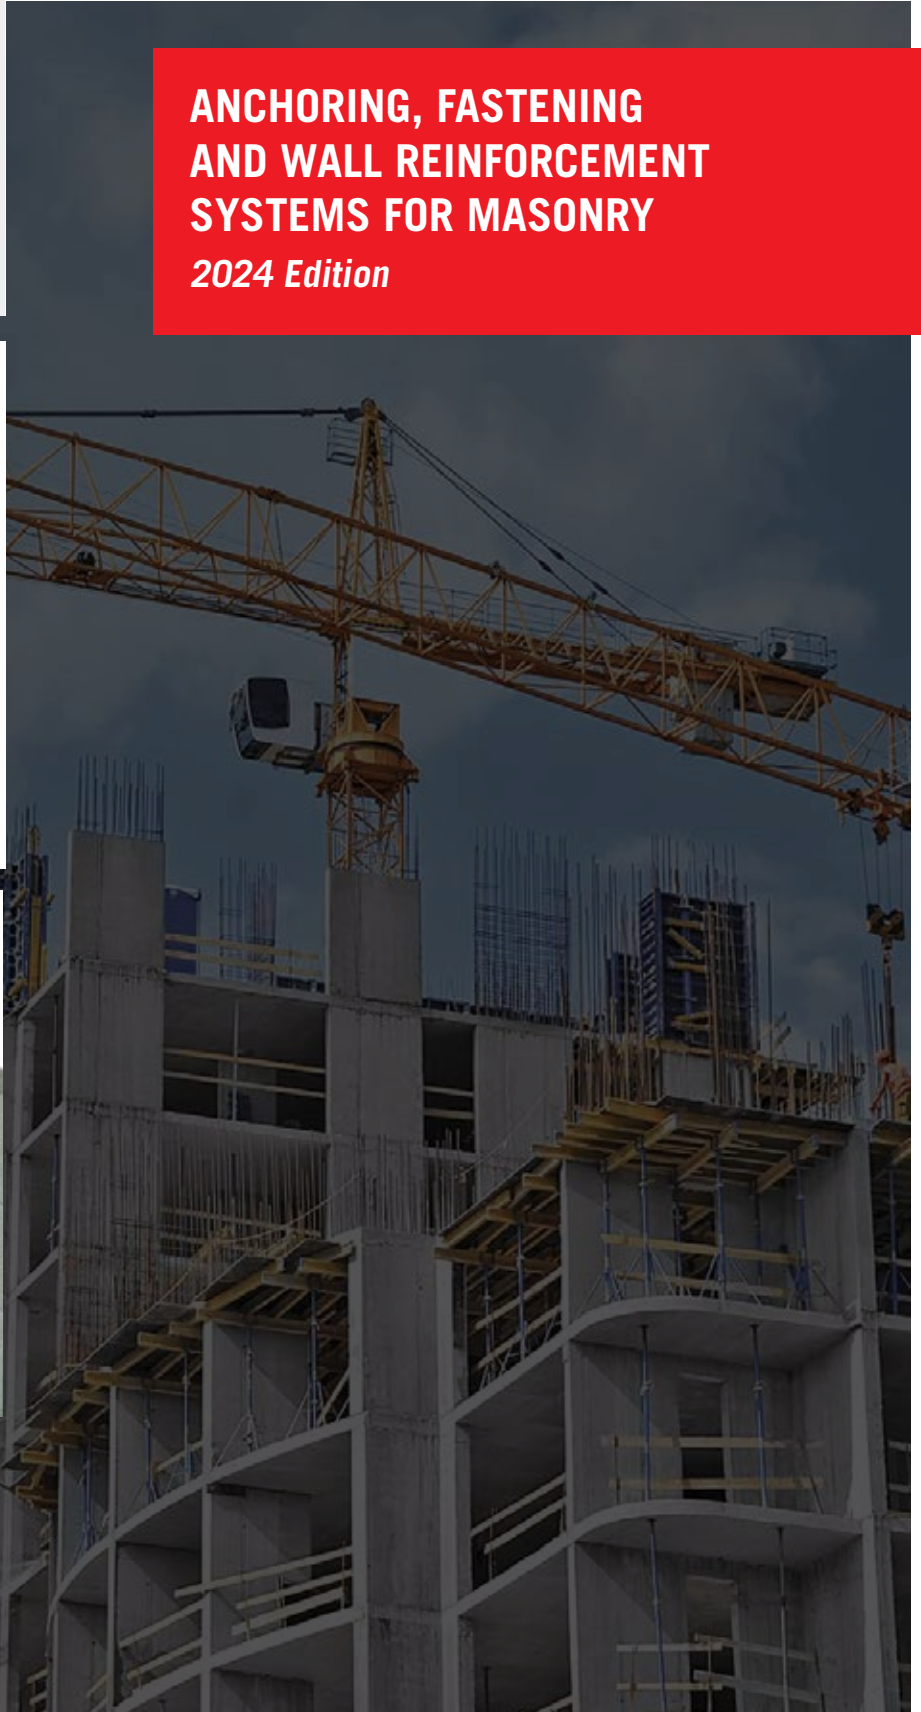


**ANCHORING, FASTENING
AND WALL REINFORCEMENT
SYSTEMS FOR MASONRY**
2024 Edition

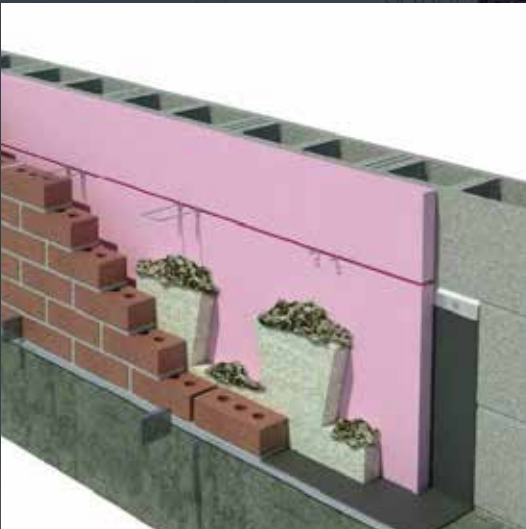

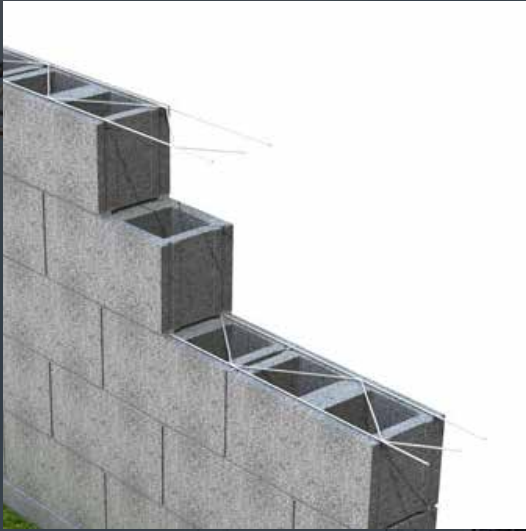

**P-312 / P-316
SINGLE ADJUSTABLE ANCHOR ⁽²⁾**

16-ga. anchor with single 3/16 hook that has a 3" vertical adjustment. 8 models are available for use with 0" to 4" insulation.

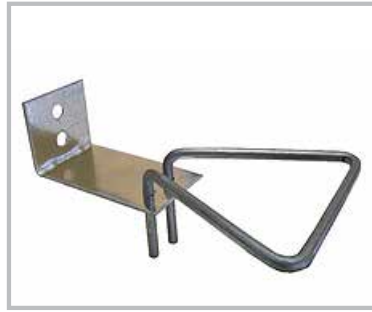

**P-312 / P-316
DOUBLE ADJUSTABLE ANCHOR ⁽²⁾**

16 ga. anchor with 3/16 double hook that has a 3" vertical adjustment. 8 models are available for use with 0" to 4" insulation.



**P-407
ADJUSTABLE ANCHOR ⁽¹⁾**

16-ga. anchor with 3/16" triangle and 1.5" vertical adjustment. 8 models are available for use with 0" to 6" insulation.



**P-273
DOUBLE ADJUSTABLE ANCHOR ⁽¹⁾**

14-ga. anchor with 3/16" double hook and 2.5" vertical adjustment. 8 models available for use with 0" to 4" insulation.



**HB-213
ADJUSTABLE FASTENER ⁽¹⁾**

Anchor with flattened fastener adaptable to insulation thickness.



**ADJUSTABLE ANCHOR
WITH HANDLE ⁽¹⁾**

14-ga. anchor with 3/16" triangle and 4" vertical adjustment.



PRE-FOLDED BRICK CONNECTOR

Masonry connector used for all residential projects in Canada. Pre-folded, hot-dip galvanized model complies with CSA-A370-14 of the National Building Code.



FLAT BRICK STRAP



BLT-8


BLT-8 masonry anchor - Flex-O-Lok®. The triangle is made of 3/16" wire.

⁽¹⁾ Hot-dip galvanized or stainless steel

⁽²⁾ Factory-galvanized or stainless steel


BLOCK FRAMES

BRICK VENT AND WEEP HOLES

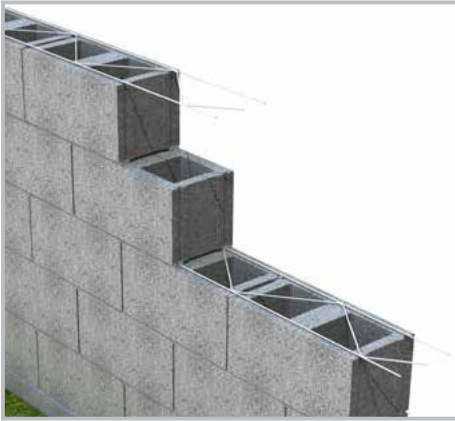


CONCRETE BLOCK REINFORCEMENT TRUSS TYPE

Designed to be inserted into the mortar joint of concrete block walls. This reinforcement is manufactured for blocks from 4 to 12 inches in width and in three types of strength. Standard, *Heavy duty* and *Super heavy duty*.

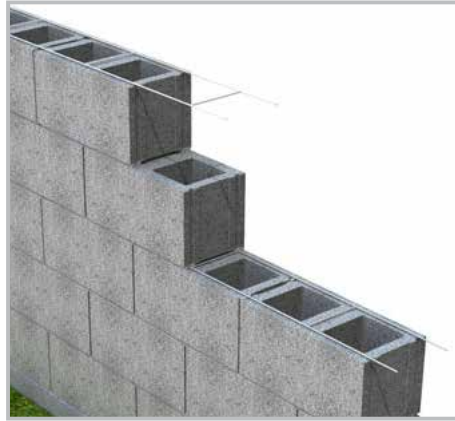

CONCRETE BLOCK REINFORCEMENT SCALE TYPE


Designed to be inserted into the mortar joint of concrete block walls. This reinforcement is manufactured for blocks from 4 to 12 inches wide and in three types of strength. Standard, *Heavy duty* and *Super heavy duty*.

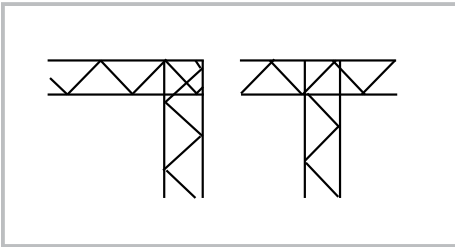

“L” & “T” FRAMES TRUSS TYPE

Designed to be inserted into the mortar joint of concrete block walls. This reinforcement is manufactured for blocks from 4 to 12 inches wide and in three types of strength. Standard, *Heavy duty* and *Super heavy duty*.


NOTE: Please use the same type as the length of reinforcement for your project.

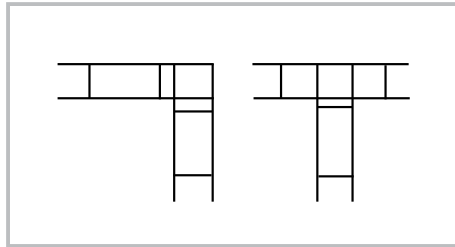

“L” & “T” FRAMES TYPE SCALE



STD/CSR/JUMBO BRICK VENT

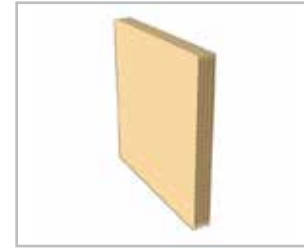

QUADRO-VENT

Allows ventilation and evacuation of moisture while blocking access to insects and other debris.

Standard brick: 3/8" x 2 1/2" x 3 3/8"

C.S.R. brick: 3/8" x 2 3/4" x 3 3/8"

Jumbo brick: 3/8" x 3 1/2" x 3 3/8"



WEEPVENT

Available in different formats. They provide better humidity control. The product offers good air circulation, preventing the build-up of moisture.


MORTARNET AND WALLDEFENDER

In masonry cavity walls, the accumulation of mortar above the level of flashings and drain holes is one of the main causes of poor water drainage performance.

MortarNet's Wall Defender retains excess mortar above flashings and drain holes, keeping them free and clear. Its new design, using a structural strand polymer mesh, allows moisture to drain quickly and unobstructed to the weep holes, while greatly increasing air circulation in the cavity to promote drying.



ANCHORS FOR STONE



**STONE ANCHOR
P152 A**



**STONE ANCHOR
P152 B**



**STONE ANCHOR
P152 C**



**STONE ANCHOR
P152 D**



**STONE ANCHOR
P152 E**



**STONE ANCHOR
P152 F**



**STONE ANCHOR
P152 P**



P152 SYSTEM VARIANTS AVAILABLE ON REQUEST


RESTORATION

“TORQ-LOK” ANCHORING SYSTEM

Series #500 to #530 mechanical anchoring systems are effective ways of reattaching exterior masonry cladding to the building structure. Composed of brass expansion bolts and a stainless steel rod, each series provides an effective hold and superior corrosion resistance.

HELICAL RODS

The helical stabilizing anchor system is a safe, economical way of attaching exterior masonry cladding (brick, block, stone, panel and concrete) to the building structure without removing the cladding.



Step 1
Drill a pre-drilled hole using a percussion drill.



Step 2
Insert a spiral rod of appropriate length and diameter with the installation tool.

ACCESSORIES | BON TOOL - MARSHALLTOWN - STABILA



ANCHORS, TRIANGLES AND RODS



P-400 TRIANGLE ⁽¹⁾

Used with multiple masonry anchors. Several lengths available to suit all spacing requirements.



P-270 DOUBLE PINTLE ⁽¹⁾

Used with multiple masonry anchors. Various lengths and finishes available to suit all spacing requirements.



P-300 SINGLE ⁽²⁾

Used with multiple masonry anchors. Various lengths and finishes available to suit all spacing requirements.



P-300 DOUBLE ⁽²⁾

Used with multiple masonry anchors. Various lengths and finishes available to suit all spacing requirements.



P-318 ⁽²⁾

Used with many masonry anchors. Various lengths and finishes available to suit all spacing requirements.



SEISMIC SYSTEM

Seismic rod and clip.



P-235 SINGLE EYE ANCHOR

Made from the P-235 (S) female part used with a P-300 (Single Pintle). Used to join two masonry walls. Several lengths available to suit all wall spacings.



P-235 DOUBLE EYE ANCHOR

Made of the P-235 (D) female part used with a P-270 (Double Pintle) for maximum strength. Used to join two masonry walls. Several lengths available to suit all wall spacings.



V-BRACKET

Designed to adapt to different wall widths.

⁽¹⁾ Hot-dip galvanized or stainless steel

⁽²⁾ Factory-galvanized or stainless steel

THERMAL ANCHORS

THERMAL CONCRETE 2-SEAL WING-NUT™

The Thermal Concrete 2-Seal™ wing-nut is an innovative single-screw veneer fastener for concrete, CMU or wood stud construction. The anchor features a double-diameter cylinder with factory-installed EPDM washers to seal both the insulation face and the air/vapor barrier. The wings are designed to reduce heat transfer through the rigid insulation.



POS-I-TIE® SYSTEM

The original Pos-I-Tie® is a two-part system for fastening bricks and facing stones to a variety of existing supports. It simultaneously penetrates the external insulation, makes positive contact with the substrate to transfer lateral loads, and seals the hole in the insulation with an EPDM washer under the head of the cap screw.



SEALER

ADFAST - NEUTRAL SILICONE SEALANT

ADSEAL DWS Series 4580 is a neutral silicone adhesive sealant. It is ideal for movement and perimeter joints. It meets ASTM C920, S, NS, class 50, NT, M, G, A, O standards. Can be used on materials such as aluminum, glass and masonry.


9 colors in stock: glacier white, tan, red fox, bronze, torrefied, gray wolf, black, cement gray and galvanized aluminum.

Made in Quebec.



ETHAFOAM ROLL

When applying SCELLANT, always use a joint support (ethafoam roll).

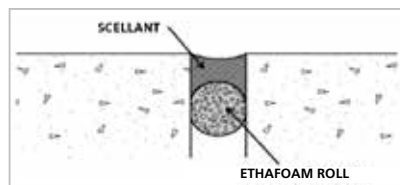

TREMstop® ACRYLIC by TREMCO

Acrylic latex firestop sealant. TREMstop® is a spray-applied acrylic latex sealant designed for firestopping applications, including joints and penetrations.

This product accepts paint.



NMD-80 - CLEANING NEW MASONRY

NMD-80 is the most effective, profitable and safe way to **clean new masonry**. A **detergent-based solution designed to clean excess mortar from the surface**, and eventually reduce efflorescence. NMD-80 can be applied to all masonry products, including brick, stone, colored block, synthetic stone and granite.

No-brush cleaning, low-pressure application, high-pressure rinsing.
Available in 1 gal., 5 gal. and 55 gal. Covers 100-200 sq.ft. per gallon.



SOS-50 - CLEANING WET CAST CONCRETE PRODUCTS

SOS-50 is a **detergent that removes mortar from wet cast concrete products**. It is an **organic salt-based product with a low Ph**. This product is similar to NMD80 but without HCL (it gives the same result).

Covers 100-200 sq.ft. per gallon.



EF-FORTLESS - EFFLORESCENCE

A **soapy solution that removes powdery efflorescence and helps control its return**. The user doesn't have to use a pressure washer to get good results. This product contains very mild acids and can be used on color-sensitive surfaces. Won't discolor brick, stone or mortar. One rinse is all that's needed to remove it all.

Available in 5 gal. Covers 50-125 sq.ft. per gallon.

CLEANSOL BC - POLLUTION REMOVAL

Cleansol BC is an all-purpose alkaline cleaner designed to thoroughly clean dirt or pollution from **vinyl, painted metal, wood galleries or acrylic walls**.

Available in 1 gal. and 5 gal. Covers 100-250 sq.ft. per gallon.

ONE RESTORE - POLLUTION REMOVAL

Innovative product for cleaning and maintaining exterior building surfaces such as **limestone, concrete, brick, glass and windows**. Safe and effective. Does not affect anodized aluminum or scratch glass. Simple application. Spray on and rinse off, no brushing required. Removes stains caused by time, pollution, mildew and oxidation.

Available in 5 gal. and 55 gal. Covers 75-200 sq.ft. per gallon.

GRAF-EX - GRAFFITI REMOVAL

Biodegradable product, without corrosive additives, specially developed to remove ink and paint from masonry surfaces. Will not damage masonry or cause rust on metal. Just rinse with water to stop the activity.

Available in 5 gal. Covers 100-250 sq.ft. per gallon.

EC JET APPLICATION SYSTEM — TOOLS

The EC Jet is the easiest way to apply NMD-80 and/or SOS 50. The EC Jet is a chemical injector specially designed to dilute the cleaner 4:1 (four parts water to one part cleaner). It must be connected to a pressure washer of at least 2500 lbs.



SOPRASEAL STICK FLASHPRO HT

Self-adhesive air/vapor barrier membrane with polymer-based adhesive and polyethylene film for use at the perimeter of openings. No primer required for rapid installation.



3M^{MC} WALL FLASHING TAPE

3MTM 3015TWF Air and Vapour Barrier Wall Flashing Tape is a heavy-duty flashing membrane designed to adhere to a wide range of building materials without the use of primer.



BLUESKIN TWF MEMBRANE

Henry/Bakor Blueskin TWF is a self-adhesive membrane consisting of a rubberized SBS asphalt compound, fully laminated to a yellow, cross-laminated polyethylene film.



TEXTROFLASH FLASHING (TWF) — AN ECO-RESPONSIBLE PRODUCT

Textroflash is a 40-mil-thick, asphalt-free membrane with a transparent, adhesive varnish. This adhesive is factory-laminated to a polyethylene sheet, producing a flexible membrane suitable for application to masonry, concrete, steel, gypsum, wood and polystyrene. Available in 12", 18", 24" and 36" wide by 75' long rolls. Use of a Sandell S-600 primer is strongly recommended. UV-resistant for 90 days.



HARDWARE, SCREWS & ZAMAC



SCREWS FOR WOOD

Models available to suit all anchor types and projects. Available in hot-dip galvanized and stainless steel.



SELF-DRILLING METAL SCREWS

Models available for all types of anchoring and projects. Climaseal screws.



BEON SCREW



ZAMAC NAIL FOR CONCRETE



TAPCON SCREW FOR CONCRETE



WEDGE ANCHOR FOR CONCRETE



MAC SCREW
1000-hour



SCREW ROD
Available in all sizes

Models available to suit all anchor types and projects. JUST ASK US!

PEARL® PRO-D MASONRY SAW

- Dust containment system
- Heavy-duty 2HP induction motor
- Lightweight (only 110 lb)
- Belt drive
- Dual voltage (110V and 230V)
- One-year warranty



V-MAX™® HEPA INDUSTRIAL VACUUM CLEANERS BY PEARL

- Meets OSHA respirable crystalline dust standards
- Occupational health and safety approved
- Mess-free dust removal with Pearl's continuous bagging system 1 (PAV18.2).
- 3 (PAV36.2) switch system lets you activate each motor independently
- 1.5" hose (PAV18.2); 2" hose (PAV36.2)
- Certified cylindrical HEPA filter guaranteed 99.99% efficient at 0.3 microns
- Pressure gauge measures negative pressure in tank
- UL/CSA certified
- Two-year limited warranty



PAV18.2 - 176 CFM



PAV36.2 - 285 CFM

ARBORTECH'S ALLSAW BRICK AND MORTAR SAW

Arbortech's AllSaw brick and mortar saw is perfect for removing existing mortar joints, repointing, caulking and restoring buildings.

A tool for professionals, with a range of masonry blades for specialized applications.



STRUCTURAL SHIMS

Grove Shims™ color-coded plastic shims are made from polypropylene (PP), high-impact polystyrene (HIP) and ABS. They are designed for a wide range of performance and load conditions.

- Resisting up to ten tons of compressed force, lightweight U-shaped plastic shims are designed to fit around bolts and anchors.
- Rounded shape allows greater flexibility in aligning plastic U-shims without protruding corners.
- Available in thicknesses of 1/16", 1/8", 1/4", 3/8" and 1/2".
- Plastic shims are an efficient way to precisely fit stone, granite panels and marble.



REINFORCING BARS

STEEL REINFORCING BARS 15 M

Steel rebars for reinforcing concrete. Used to reinforce concrete or masonry. They are made of low-carbon steel and have a ribbed surface to improve their bond with concrete.



FIBERGLASS REINFORCING BARS

Highly resistant to tensile stress, these bars are manufactured from vinyl ester resin to resist corrosion, and the fibers give the bars their stiffness properties.

- Tensile strength 2 to 3 times greater than steel
- Resistant to aggressive environments
- Electromagnetic neutrality
- Thermal insulation
- Lightweight (1/4 the weight of steel)
- Easy to cut (no cutting permit required)



Visit the **DISTRIBUTORS** section of our website to discover our extensive network of sales outlets!

senneco.com



3400 Losch Boulevard, Suite 23
Saint-Hubert (Québec) J3Y 5T6

Telephone: 450 443-6535 • Toll free: 1 888 443-6532
E-mail: info@senneco.com

