

Active Pure - Filter

Initial Setup: Flush Before Use: Run water through your Active Pure Filter for about 3 minutes before its first use. This can be done into a bucket or directly into the sink if the tubing is long enough.

Flushing Process: Ensure the filter is disconnected from any other systems or filters it's connected to. Flush it on its own to avoid cross-contamination.

Post-Flush Check: Always inspect the filter connections for leaks. If there are no leaks, your setup is complete!

Flow Rate and Pressure:

- Flow Rate Caution: Keep water flow under 2 liters per minute. Faster flow can hinder effective filtration.
- Working Pressure: Ideal pressure is between 15 – 60 PSI. Use a pressure reducing valve if your water pressure exceeds 55PSI.
- Temperature Range: Ensure usage within 5 – 40°C.

Mounting: Use the included wall brackets for secure installation inside a cupboard.


Tubing Tips:

- Cutting Tubing: Always use a sharp knife for a clean cut. Avoid scissors or dull knives as they may damage the tube and cause leaks.
- Connecting Tubing: Insert the tubing about 20mm into the connector.
- Disconnecting Tubing: Press down on the O-ring and gently pull the tubing out.

Professional Help: We recommend getting a professional for installation to ensure everything is set up correctly. Ionza won't be liable for issues from incorrect installation.

Further Assistance: Visit our product page at www.ionza.co.nz for more detailed information.

Active Pure Filter Installation

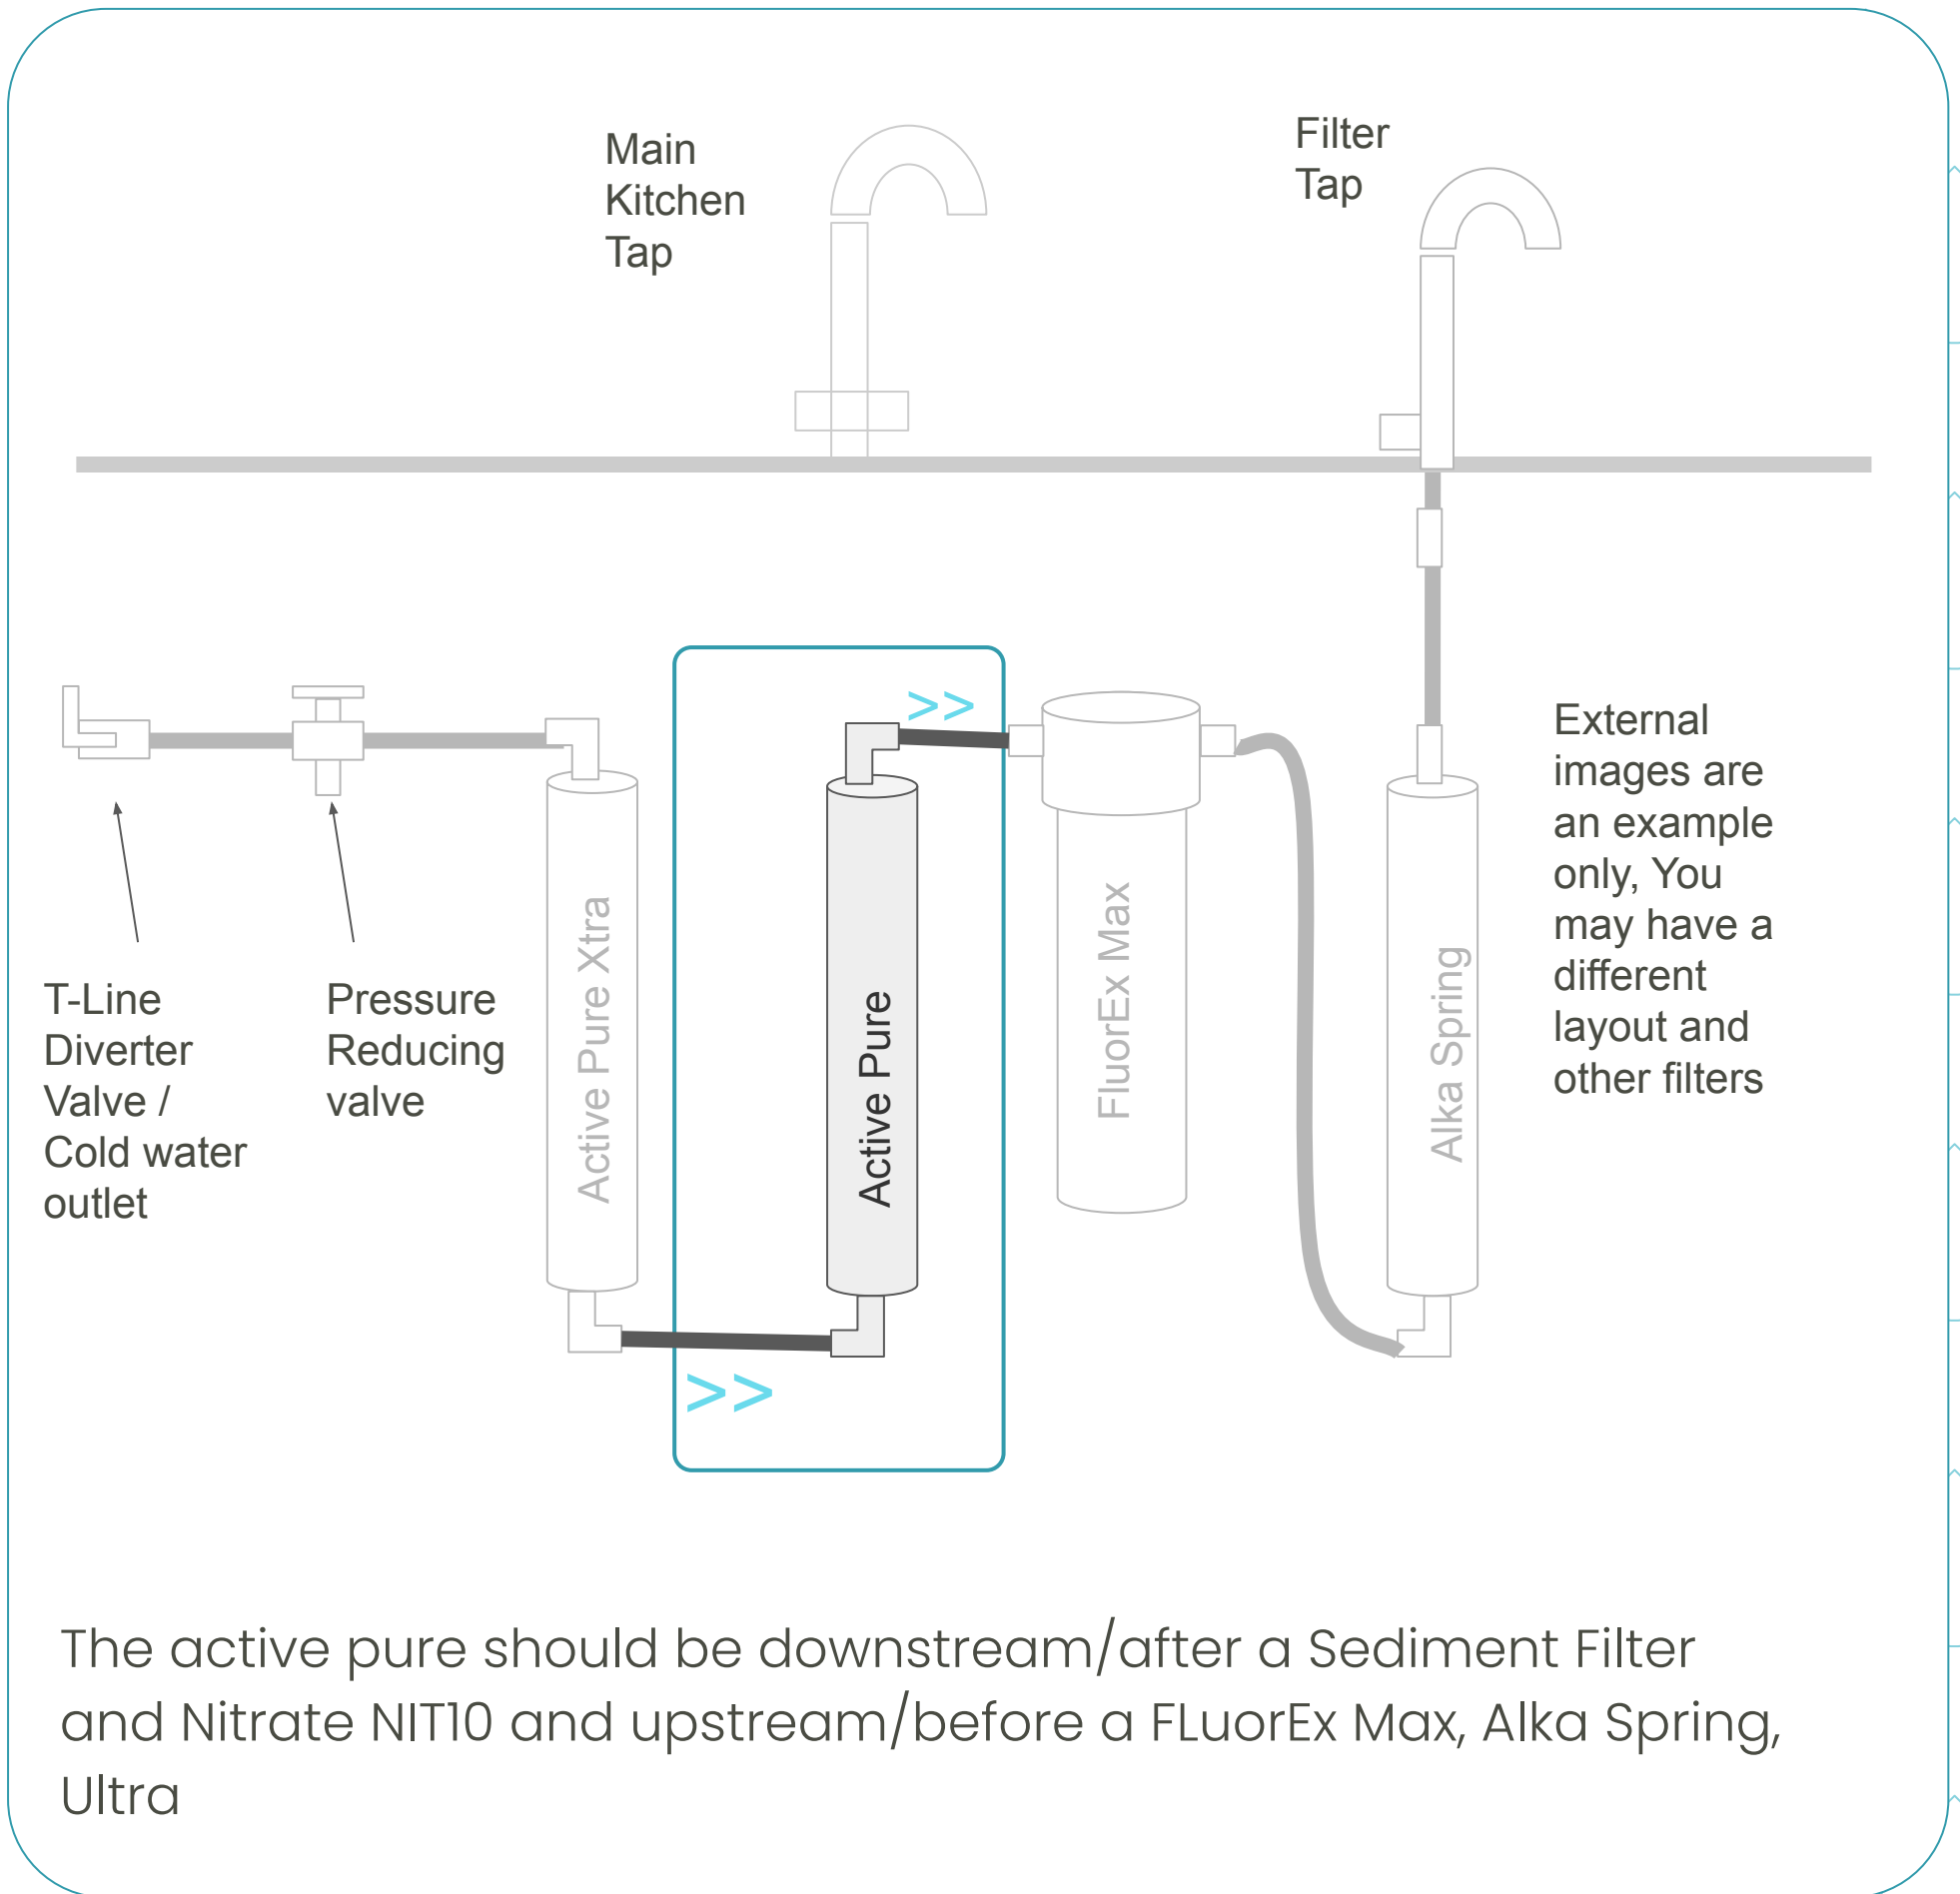

Do you prefer video Instruction ?

Scan Code for a brief video on how to insert/remove tube from john guest fittings



Do you prefer video Instruction ?

Scan Code for a brief video on how to cut the tubing

