


Alka Spring Fountain Under Bench

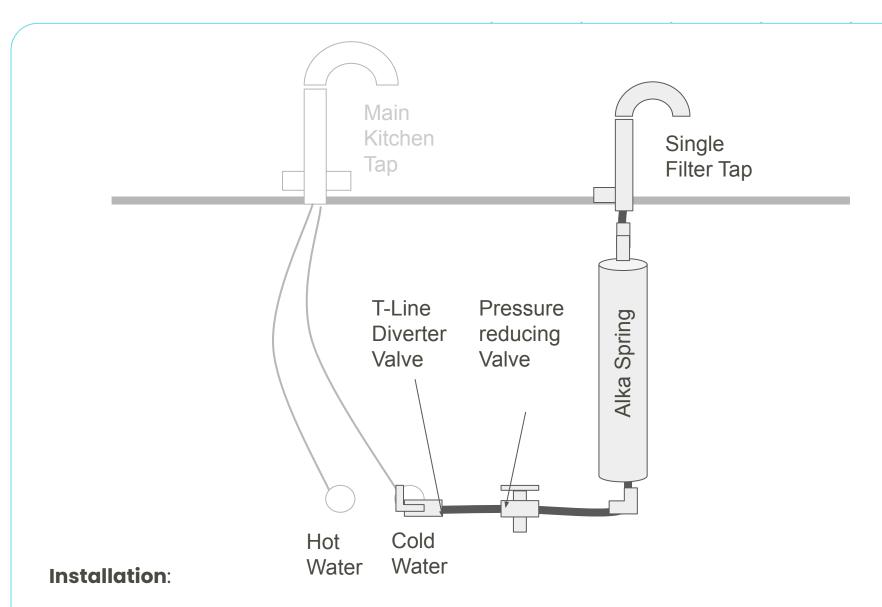

- Decide where you want the tap on your sink and drill a hole of the right size. Connect to Cold Water:
- Fit the T-line diverter valve to the cold water supply line.

Manage Pressure:

• Place a pressure reducing valve before the filters if your water pressure exceeds 55PSI. This is crucial for maintaining system integrity.

Filter Setup:

Arrange and install the filters according to the provided diagram.

System Specifications:

- Pressure Range: Operates best between 15 60 PSI.
 - Install a pressure reducing valve for pressures above 55PSI.
- Temperature Range: Suitable for use in temperatures from 5 40°C.
- Mounting: Use the included wall brackets to secure the system and cartridge inside a cupboard.
- Water Flow: Adjust the T-line valve to achieve a water flow rate of about 2 liters per minute.

Important Advice:

- We highly recommend professional installation to ensure safety and efficiency.
- Ionza cannot be held responsible for damages due to incorrect installation.