


## Fluoride Free Benchtop Twin Sump

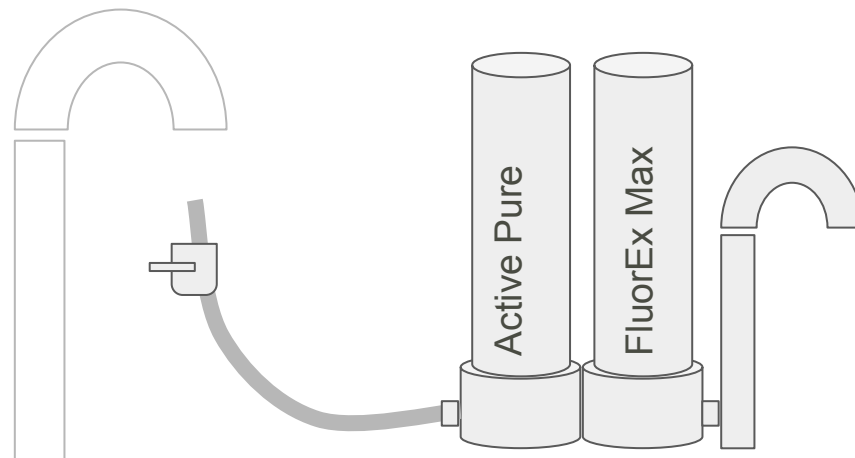

### Installation instructions:

Install the Filters in the order shown in this diagram

The Active Pure pre-filter needs to be flushed first before the Fluorex Max filter is installed. This is so the flushed carbon from the Active Pure filter does not clog the FluorEX Max.

After flushing the Active Pure filter then the FluorEX Max filter can be installed and flushed.

To install the tap diverter valve, it is necessary to unscrew the nozzle at the end of the sink tap ( You may need to insert an adapter ring, provided with the valve into the tap). The diverter valve can be fitted to the adapter ring thread or the newly expose tap thread.

The vertical position of the lever on the tap diverter valve directs water flow into the sink for tasks such as rinsing and washing dishes, while the horizontal position directs water flow through the sumps.

If the mixer tap is a single cold water tap, an additional rubber connector fitting may be necessary for installation. If this is the case please contact us.

**Only run cold water through the sumps!**

**Working Pressure:** 15 - 60 PSI

**Working Temperature:** 5 - 40°C

**Waterflow speed:** Tune valve so water flow is approx 2 Ltr/min

