

Lifespring Town Enriched

Important Installation Notes:

- Carefully follow these instructions to avoid equipment damage or health risks.

Initial Flushing:

- Install and Flush the Lifespring whole house pre-filter for approx 2 mins. This prevents carbon fines from the carbon filter from clogging the FluorEx Max.
- Install and flushing the FluorEx Max filter first for about 5 mins, then install and flush the Alka spring filter.
- Flush any filter for 2 minutes if it hasn't been used for 2+ days.
- If installing as pre-filters to an ionizer or hydrogen machine, make sure to flush before connecting to the machine
- Always inspect for leaks after installation.


Installation Steps:

Choose where to install the tap on your sink and drill a hole. Install the T-line diverter valve to the cold water line and a pressure reducing valve before the filters. Follow the diagram to install the filter and Alka Spring correctly. Use wall brackets for mounting the system and cartridge inside a cupboard. Adjust the pressure reducing valve to achieve a water flow of approximately **2 liters per minute**.

System Specs:

- Working Pressure: 15 - 55 PSI (use a pressure valve for pressures over 55PSI).
- Working Temperature: 5 - 40°C. Only use cold/cool water through the system. Hot water compromises filtration efficiency.

Lifespring Town Enriched

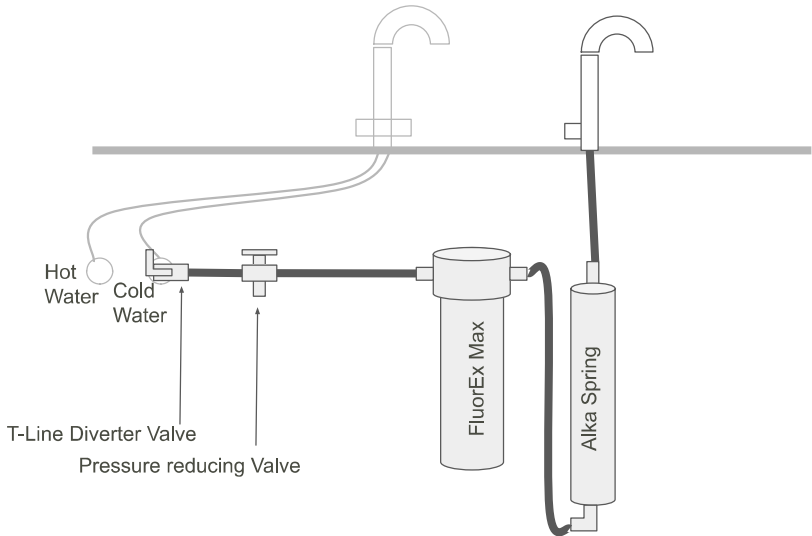

Filter Order:

- Place the FluorEx Max filter before any mineral filters to prevent clogging. For best performance, install the Lifespring Whole House filters before installing the underbench system. This setup helps the FluorEx Max efficiently remove fluoride without interference from other chemicals.

Professional Help:

- We recommend professional installation. Ionza is not liable for damage due to improper setup.

Do you prefer video Instruction ?

Scan Code for a brief video on how to insert/remove tube from john guest fittings



Do you prefer video Instruction ?

Scan Code for a brief video on how to cut the tubing

