


## Nitrate X Benchtop Filter System

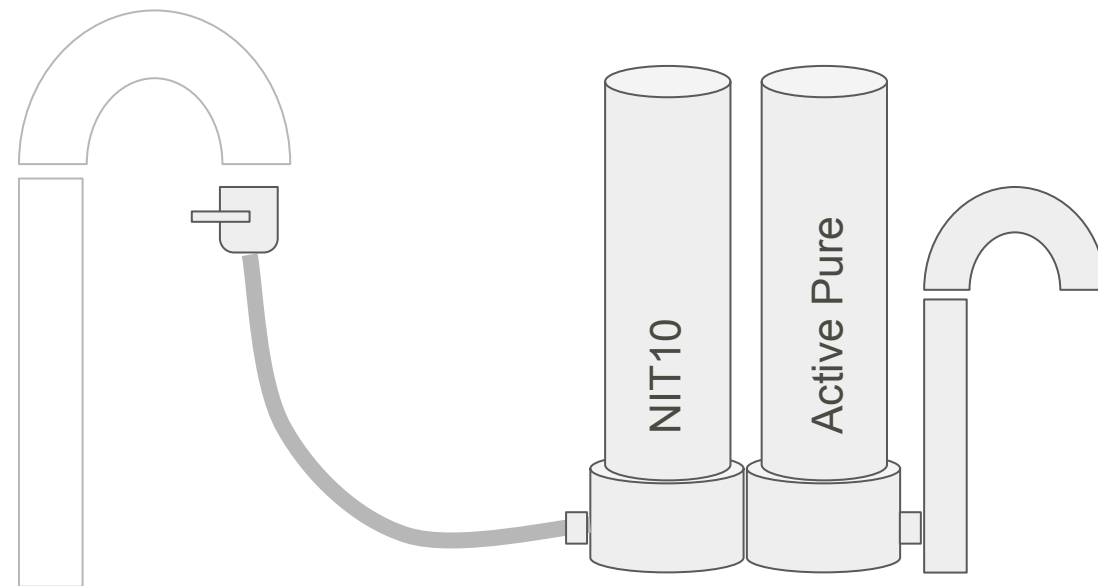

**Filter Order Matters:** Place the Nitrate Filter in the first Sump and the Active Pure Filter in the second

**Flow Rate:** Keep the water flow at or below 1.5 liters per minute. If it fills a cup in less than 5 seconds, the flow is too fast for the filters to work efficiently. Only use cold water in the system.

**Using Your Tap:** Turning the tap lever vertically lets water flow into the sink. Moving it horizontally diverts water through the filters.

**Prep and Flush:**

- After installing both filters, flush about 4 liters through the system to clean it before use.

Following these steps carefully will protect your equipment and ensure optimal filtration performance.