

# Rainbow Purifiers LLC.

## TEST REPORT

**SCOPE OF WORKS**

AHAM AC-1 2020 CADR Testing on Air Cleaner Model Luggable 16x25 5 Sickleflow Fan Configuration

**REPORT NUMBER**

105443787CRT-001C

**ISSUE DATE**

24-May-2023

**REVISE DATE**

**TESTING LOCATION:** Intertek Cortland, 3933 US Route 11, Cortland New York, 13045


**PAGES**

8

**DOCUMENT CONTROL NUMBER**

GFT-OP-10b (18 April-2020)

© 2020 INTERTEK

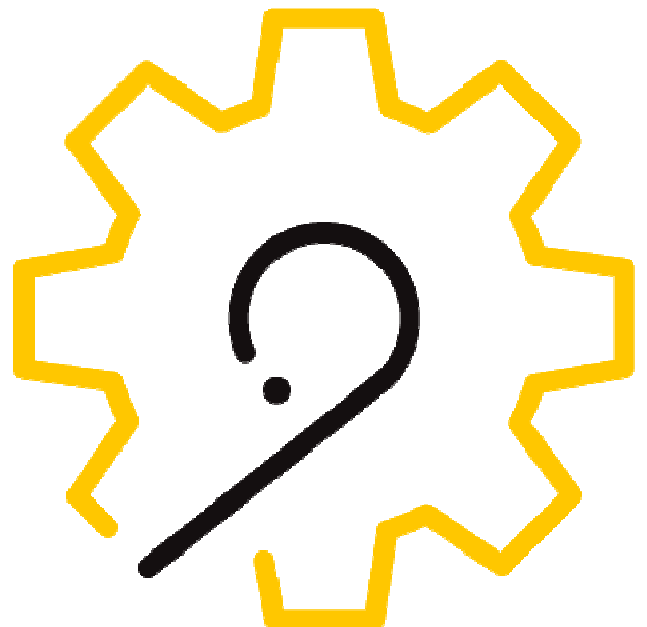

## RAINBOW PURIFIERS LLC.

Report No.: 105443787CRT-001C

Date: May 24, 2023

## OBJECTIVE

To provide clean air delivery rate (CADR) result from testing accordance with ANSI/AHAM AC-1-2020 entitled, "Association of Home Appliance Manufacturers Method for Measuring Performance of Portable Household Electric Room Air Cleaners".

## HYPOTHESIS

The CADR value is expected to be greater than the natural decay by more than two-times the measurements of uncertainty. This report is for internal use only. No conclusion will be determined by the data contain in this report.

For differentiating results, it is recommended a minimum of three representative samples are to be tested and results are to be a minimum of two times the measurement uncertainty.

## SECTION 1

### INDEX

SECTION NAMES	PAGE
Objective	3
Parameters	4
Sample Acquisition	5
Technical Staff	5
Equipment List	5
TEST DATA	6-7
PHOTO	8
Conclusion	8

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute Intertek's Reports and then only in their entirety, and the Client shall not use the Reports in a misleading manner. Client further agrees and understands that reliance upon the Reports is limited to the representations made therein. In the event any portion of this report becomes public, including but not limited to press releases, articles, and marketing material, without prior written consent from Intertek, Intertek will enforce the reproduction of the report in its entirety by making the full report public. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. Should Customer use an Intertek Report, in whole or in part, in such a manner as to involve Intertek in legal controversy or to adversely affect Intertek's reputation, it shall be Intertek's right to utilize any and all Customer information, including, but not limited to, data, records, instructions, notations, samples or documents within Intertek's custody and control which relate to the customer for the purpose of offering any necessary defense or rebuttal to such circumstances. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Date: May 24, 2023

## SECTION 2

### OBJECTIVE

To provide clean air delivery rate (CADR) results from testing conducted according to the ANSI/AHAM AC-1 2020 test procedure at one operation mode (low Speed) for the pollutants: smoke, dust, & pollen.

#### ANSI/AHAM AC-1 2020 Limits of Measurability:

Dust CADR	10 - 600 cfm
Cigarette Smoke CADR	10 - 600 cfm
Pollen CADR	25 - 450 cfm

#### Accuracy:

Smoke & Dust 5.4 %

Pollen 7.3 %

#### Measurement Uncertainty:

Dust CADR	5.4%
Cigarette Smoke CADR	5.4%
Pollen CADR	7.3%

To determine repeatability of results, multiple samples (as many as needed) should be tested.

Date: May 24, 2023

### SECTION 3 PARAMETERS

The following parameters are controlled

VALUE	DESCRIPTION	UNITS	METHOD	Measurement Uncertainty
Voltage	Line Voltage	Volts ac	Power Supply	0.064 V (Approx. 95 %, K=2)
Frequency	Line Frequency	Hz	Power Supply	0.5Hz (Approx.95 %, k=2)
Smoke	Smoke Particulate Conc.	Particles / CC	Smoke Solenoid	0.2 (Approx. 95 %, k=2)
Dust	Dust Particulate Conc.	Particles / CC	Dust Solenoid	0.2 (Approx. 95 %, k=2)
Pollen	Pollen Particulate Conc.	Particles / CC	Pollen Solenoid	0.2 (Approx. 95 %, k=2)
Time	Smoke Injection over Time	Seconds (s)	Chamber	0.45 s (Approx. 95 %, K=2)
Time	Dust Injection over Time	Seconds (s)	Chamber	0.45 s (Approx. 95 %, K=2)
Time	Pollen Injection over Time	Seconds (s)	Chamber	0.10 s (Approx. 95 %, K=2)

The following parameters are monitored

VALUE	DESCRIPTION	UNITS	METHOD	MU
Temperature	Air Temperature	°F	DAQ, Vaisala Temperature Humidity Sensor	0.55 °F (Approx. 95 %, k=2)
Humidity	Relative Humidity	%	DAQ, Vaisala Temperature Humidity Sensor	2.1% (Approx. 95 %, K=2)
Wattage	Energy Consumption	Watts	DAQ, Yokogawa WT210 Power Analyzer	0.041 W (Approx. 95 %, K=2)
Smoke	Smoke Injection 0.1um to 1m total decay	Particles / CC	Chamber	0.2 (Approx. 95 %, k=2)
Dust	Dust Injection .5µm– 3 µm total decay	Particles / CC	Chamber	0.2 (Approx. 95 %, k=2)
Pollen	Pollen Injection 5 µm – 11 µm total decay	Particles / CC	Chamber	0.2 (Approx. 95 %, k=2)

Date: May 24, 2023

**SECTION 4****SAMPLE ACQUISITION**

Samples Provided by Client.

SAMPLE #	DESCRIPTION	SERIAL #	PURCHASE LOCATION	DATE	CONDITION
Luggable 16x25 5 Sickleflow Fan	Air Cleaner	CRT2305180915-001	Sent in by Client	May 18, 2023	Sample Received from Client

**SECTION 5****TECHNICAL STAFF**

#	Staff Name	Area of Expertise
1	Mike Podoliak	Proficient in Air Cleaner testing according to ANSI/AHAM AC-1 2020
2	Cory Keeney	Proficient in Air Cleaner testing according to ANSI/AHAM AC-1 2020
3	Nirali Patel	Qualified to review Air Cleaner testing according to ANSI/AHAM AC-1 2020

**SECTION 6****EQUIPMENT LIST**

#	EQUIPMENT DESCRIPTION	MANUFACTURER'S NAME / MODEL # / SERIAL #	INTERTEK ASSET #	CALIBRATION DATE	CALIBRATION DUE
1	Aerodynamic Particle Sizer	TSI Inc. 3321	A261	6/3/2022	6/3/2023
2	Laser Aerosol Spectrometer	TSI 3340A	D708	11/28/2022	11/28/2023
3	Humidity/Temperature Sensor	Vaisala Inc. HMW31YB	T680	9/15/2022	9/15/2023
4	Power Analyzer	Yokogawa WT210	G065	9/15/2022	9/15/2023
5	Stopwatch	Control Company S/N:170715011	D715	12/1/2022	12/1/2023

**Note: The equipment measurement uncertainty is stated in the Test Procedure.**

Date: May 24, 2023

**SECTION 7**  
**TEST DATA**

**16 x 25 SickleFlow – 5 Fan Configuration DATA**

Model/Configuration	Test Particulate	Natural Decay Rate (-)	CADR (FT <sup>3</sup> /Min)	CADR STDEV (FT <sup>3</sup> /Min)	Power (Watts)
Luggable 16x25 5 Sickleflow Fans – Continuous Speed CRT2305180915-001 Tested on Floor	Smoke	0.00366	170.2	1.4	7.0
	Dust	0.00778	217.6	1.1	7.0
	Pollen	0.09936	236.2	5.6	7.0

Model/Configuration	Test Particulate	Test Voltage V	Test Frequency Hz	Ambient Test Temperature °F	Ambient Humidity %RH
Luggable 16x25 5 Sickleflow Fans – Continuous Speed CRT2305180915-001 Tested on Floor	Smoke	120	60	72	39
	Dust	120	60	72	39
	Pollen	120	60	71	39

Benchmark and Non-standard Test Report: Report must be reproduced in its entirety

Date: May 24, 2023

**SECTION 8**

**PHOTO**



**Unit in Test – Sickieflow Fans – 5 Fan Configuration**

**SECTION 9**

**CONCLUSION**

The CADR value is greater than natural decay by more than two times the measurements uncertainty for Smoke, Dust and Pollen. This report is for internal use only. No conclusion will be determined by the data contained in this report.

For differentiating results, results a minimum of two times the measurement of uncertainty is needed. It is recommended a minimum of three representative samples are to be tested.

Tested by  
Cory Keeney

Reviewer  
Nirali Patel

**SECTION 10**

**REVISION**

Date/ Proj # Site ID	Project Handler/ Reviewer	Page No	Description of Change

Benchmark and Non-standard Test Report: Report must be reproduced in its entirety