


# CleanAirKits Brisk Box instructions



Brisk Box kit includes CoolMaster Sickleflow PC fans, 4-6 fan wiring harness, USB-C to 12V DC barrel adapter, and 20W USB-C PD/QC3.0 wall charger. Also included are fan push pins, fan grills, zip ties, duct tape, strain-relief grommet, and corrugated plastic panels (one precut for fan installation).

\*Sold Separately: four 12x20 or 12x24" Filtrete MPR1085, 1500, 1900, 2200 or 2500

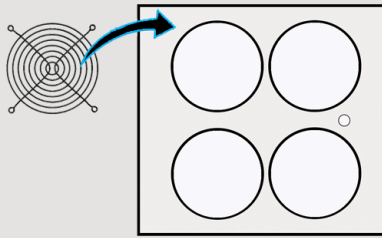


Place fan grills over the precut holes (raised side faces outwards) on what will become the top panel of the Brisk Box.


Firmly attach fan grills to the top fan plate with push pins provided, four for each fan grill.

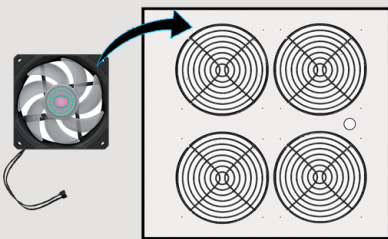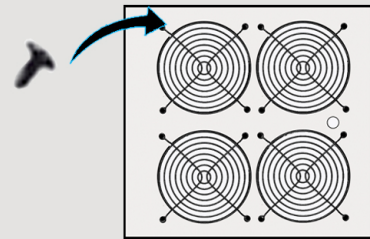

Flip the fan panel over and arrange fans over pins with printed specs on fan hubs facing the fan grills. Holographic stickers will face into the assembled box so fans blow outward.



Rotate the fans so their cables exit toward the center of the fan panel. Push fans firmly onto push pins. Plug each fan socket into the cable harness.

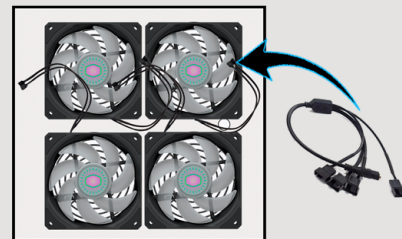

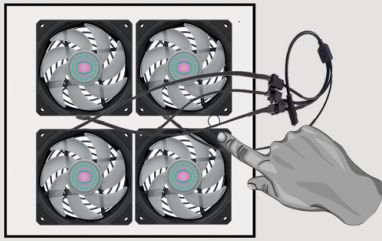

Each corner of the fan should be flush with the underside of fan plate. Carefully tuck fan cables between fans and secure with zipties through the holes in back of fans. Make sure cables cannot stray into fan blades.

Push barrel end of cable harness through half inch hole provided in top plate. Firmly close the two part grommet around cable and snap into the hole..

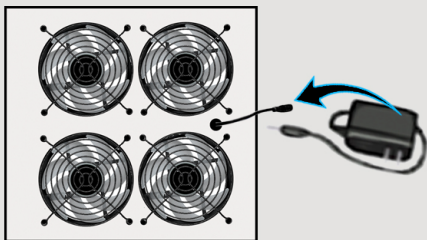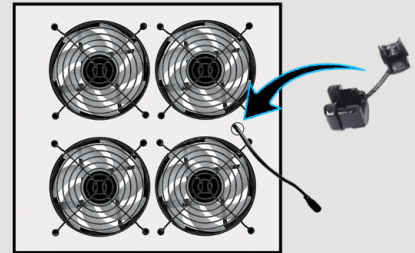




With the fan panel completed, attach the 12 volt power supply to the cable on the top of the fan panel, all fans should be working when plugged into a power supply, if not check connections.

Final inspection: before taping all sides together. Inspect all sides carefully. Tighten all push pins, power connections and the fans are flush with the fan panel.



Unwrap all air filters. Using the duct tape provided, vertically tape together the four filters to the end panel provided then tape the fan panel to the top of the now attached filter tower. Arrows printed on filters should face into the box. All edges should be completely sealed with duct tape.

(Check illustration for proper filter placement)



Plug in and enjoy!