

# CW Woodcraft® | LUX<sup>2</sup>

Magnetic Track Lighting Integration




SIMPLIFIED  
DESIGN




ULTRA SLIM  
TRACK 5MM



ACCURATE  
OPTICAL CONTROL



OPTIONAL  
MODULES



EASY  
MAINTENANCE



FAST  
CONNECTIONS



C.W.  
WOODCRAFT

For more information:  
[CWOODCRAFT.COM](http://CWOODCRAFT.COM)

# CONNECTOR

2-WAY




4-WAY





## MM30 CONNECTORS

There are two kinds of connectors to fit with the magnetic tracks. L type for 90° corner and X type for 4-way straight connection.


MM30-X

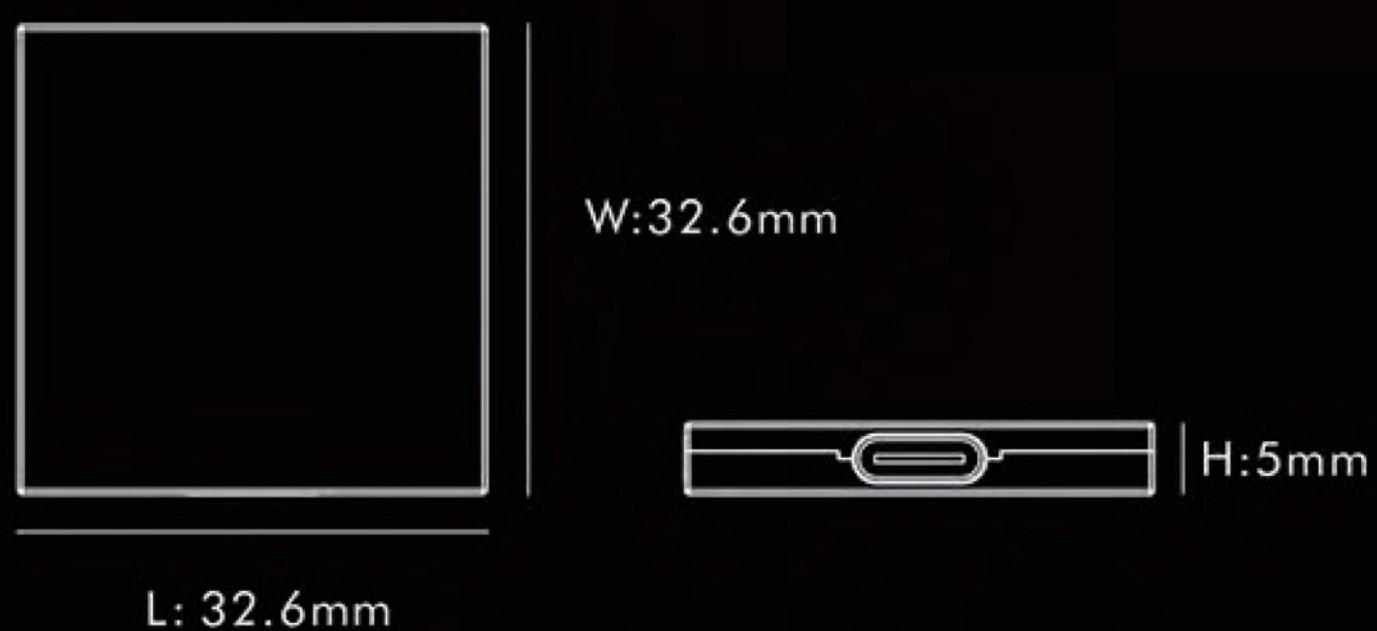

MM30-L

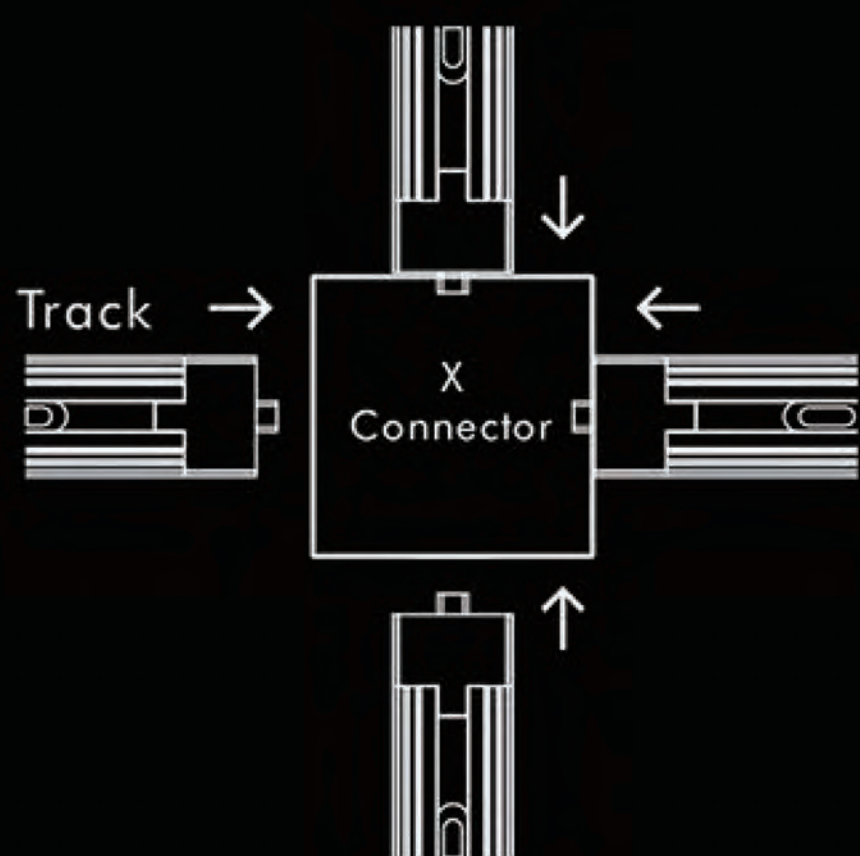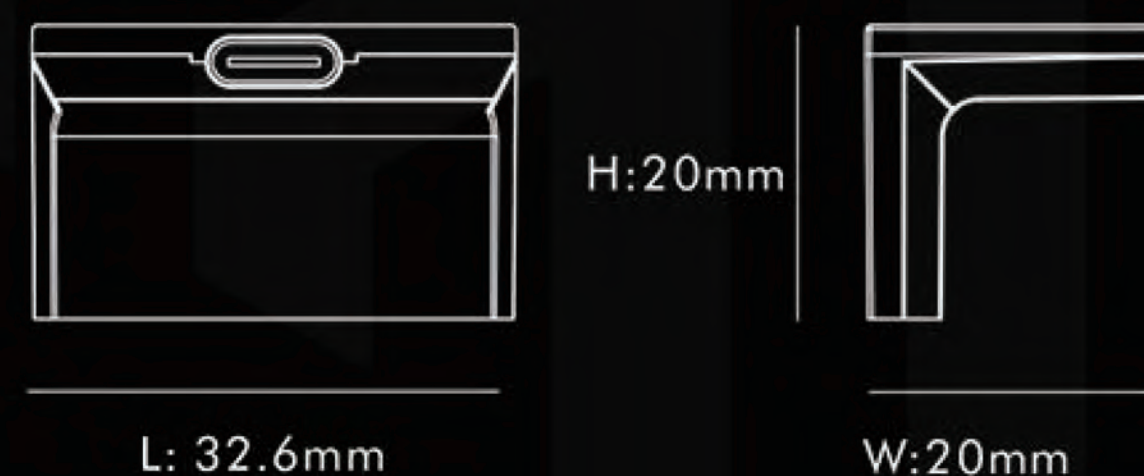

4-Way Straight Connection

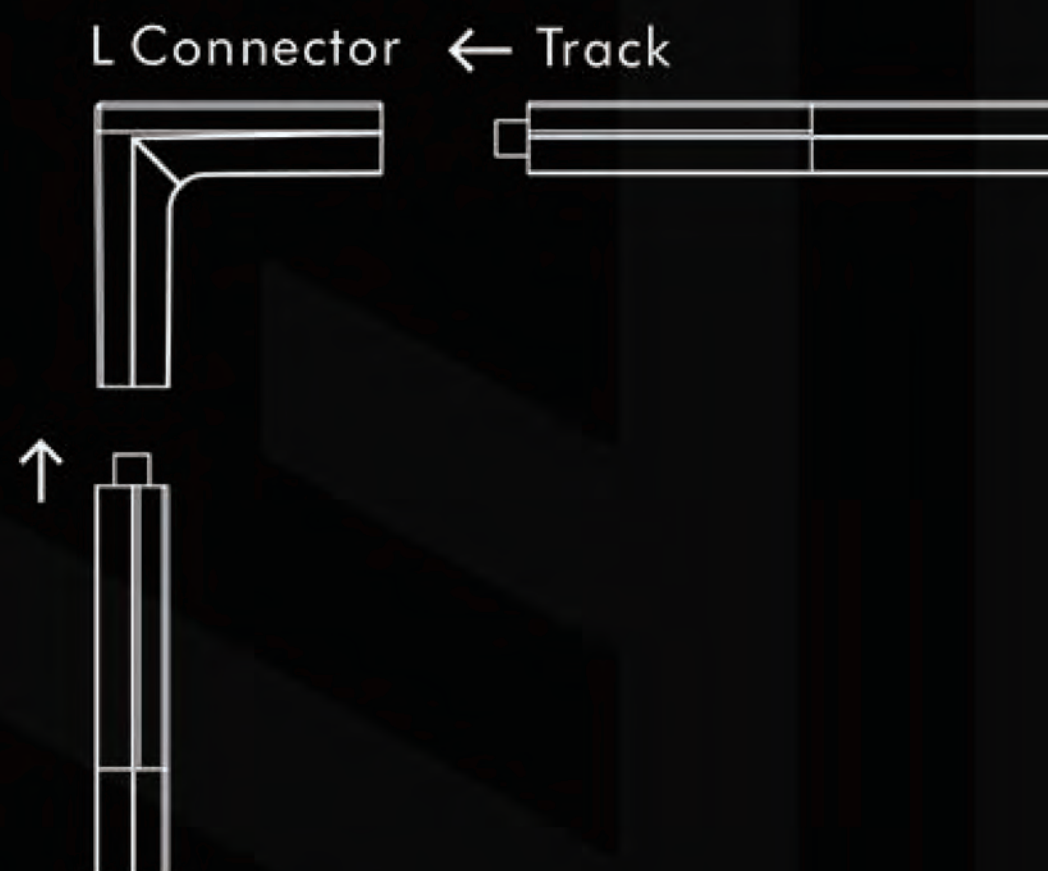

L Corner Connection

# TRACK

Surface Mounted



 Type-C Connection

Model No.:MM30-303  
Size: 286x32.6x5mm

Model No.:MM30-306  
Size: 600x32.6x5mm

Model No.:MM30-312  
Size: 1200x32.6x5mm



L: 286/600/1200mm

 | H:5mm

W:32.6mm

DC48V 2.5A

## MM30 TRACKS

This new surface mounted magnetic track in ultra slim design which is up to 5mm thickness. Adopting with high quality aluminium to enhance intensity. It is figured with Type-C plug and play system.

## Colour Options

**BK** **WH**



Indoor  
use only

For more information:  
[CWOODCRAFT.COM](http://CWOODCRAFT.COM)

**CW Woodcraft® | LUX<sup>2</sup>**  
Magnetic Track Lighting Integration

# POWER SUPPLY



## MM30 Power Supply

### Specification

Material	Aluminium
Input	AC220-240V 50/60Hz
Output	DC48V 2.1A
Power	100W


### Colour Options



## MM30-D01



L: 256mm



H:55mm

W:32.6mm



Indoor  
use only

For more information:

[CWOODCRAFT.COM](http://CWOODCRAFT.COM)

**CW Woodcraft® | LUX<sup>2</sup>**  
Magnetic Track Lighting Integration

# MODULE


## Linear Flood Light



MM30-01-030      6W  
Size: 293.5x30x23.5mm

MM30-01-060      12W  
Size: 579x30x23.5mm

MM30-01-120      21W  
Size: 1150x30x23.5mm

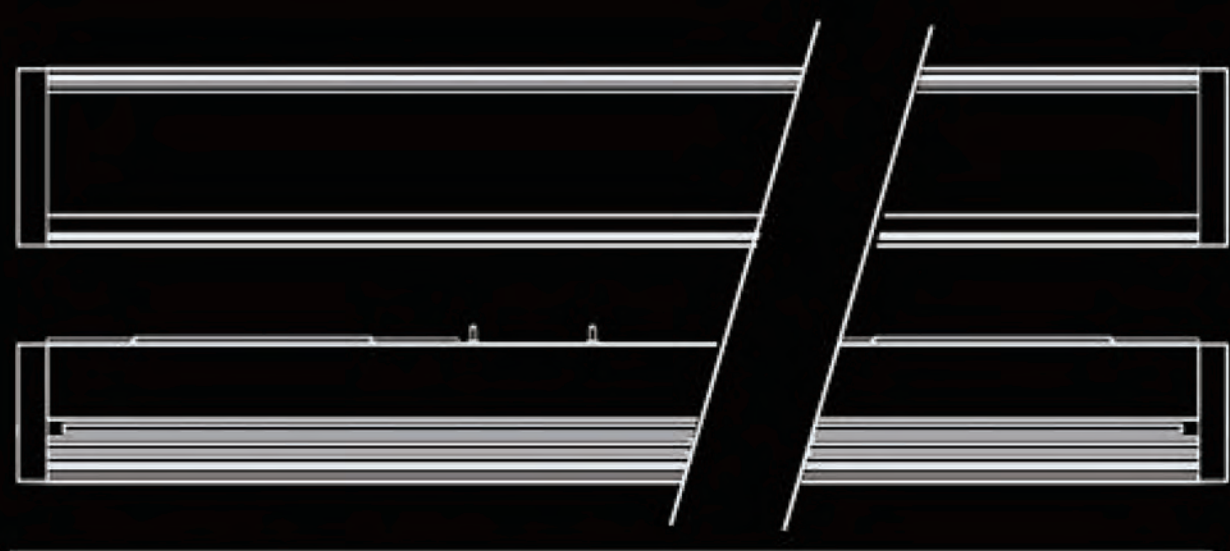

L: 286/600/1200mm


H: 23.5mm  
W: 30mm

## MM30 Spotlight Module

### Specification


Material	Aluminium
Input	DC48V
Power	6W/12W/21W
Beam Angle	97°+87° / 40°+100° 25° wall washer
CCT.	2700K/3000K/3500K/4000K 2700K~6000K
Ra	≥90

### Colour Options

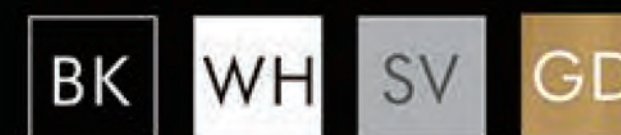

# MODULE

Linear Flood Light

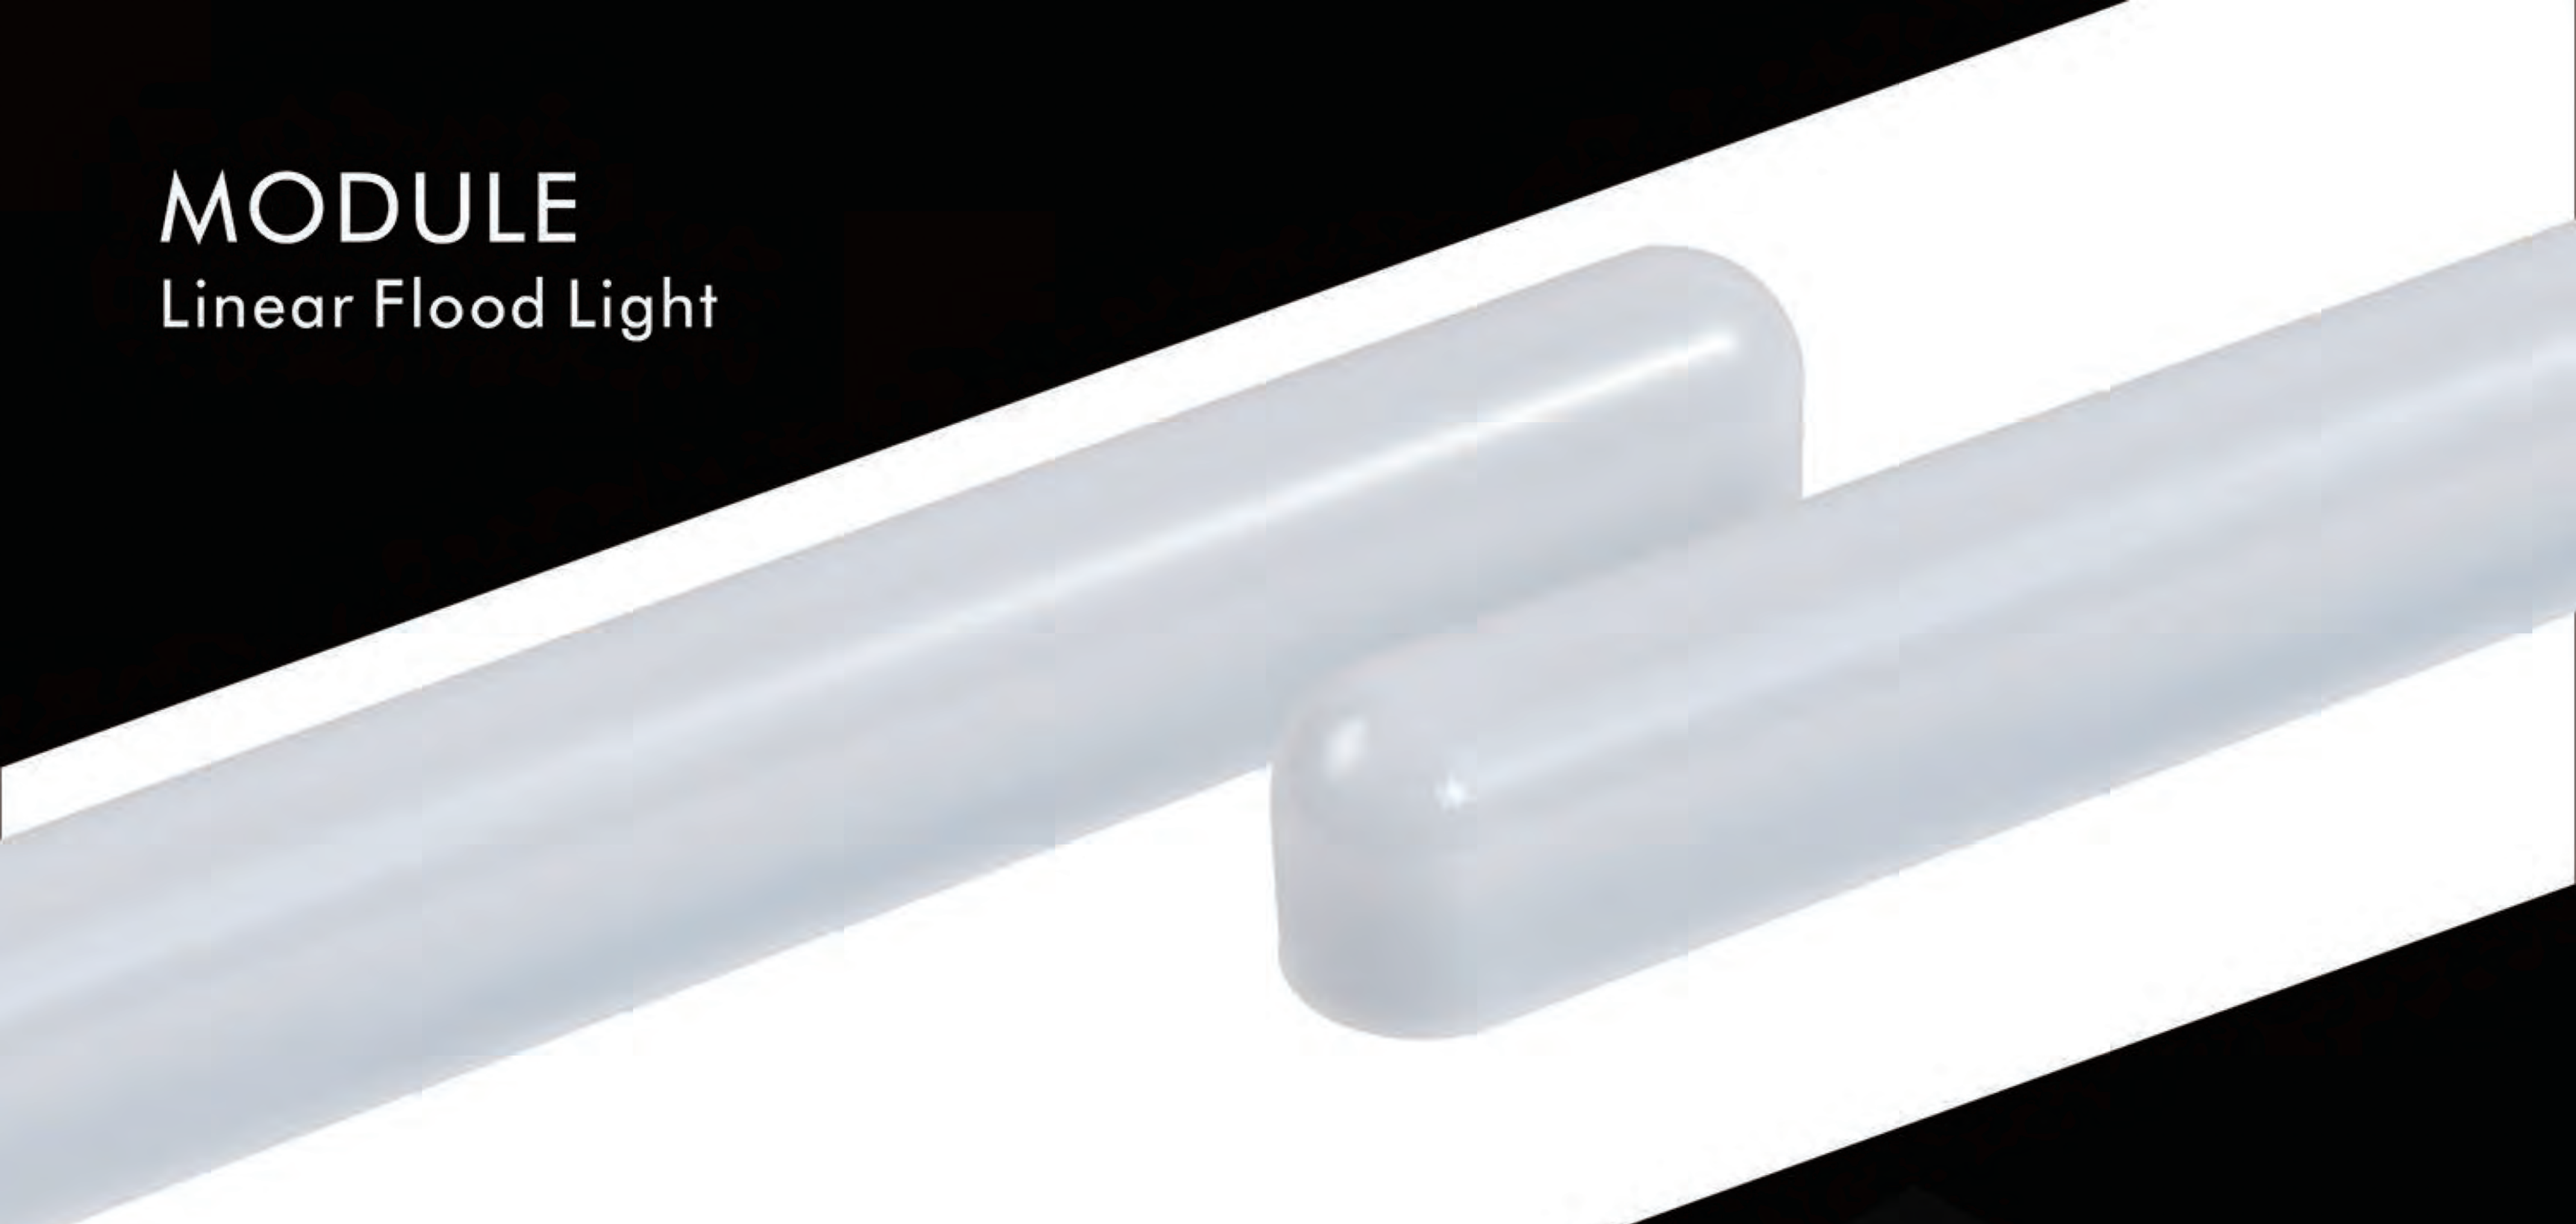

## MM30 Spotlight Module

### Specification

Material	Aluminium
Input	DC48V
Power	6W
Beam Angle	120°
CCT.	2700K/3000K/3500K/4000K 2700K~6000K
Ra	≥90

MM30-04-01



L: 260mm



W: 30mm

H: 33mm

### Colour Option

WH



Indoor  
use only



IP rating



Different  
light colors



Excellent  
thermal  
management



Excellent  
visual  
comfort

# MODULE

Linear Spot Light



## MM30 Spotlight Module


### Specification

Material	Aluminium
Input	DC48V
Power	12W
Beam Angle	15°/24°/36°
CCT.	2700K/3000K/3500K/4000K 2700K~6000K
Ra	≥90

MM30-03-01



L: 260mm

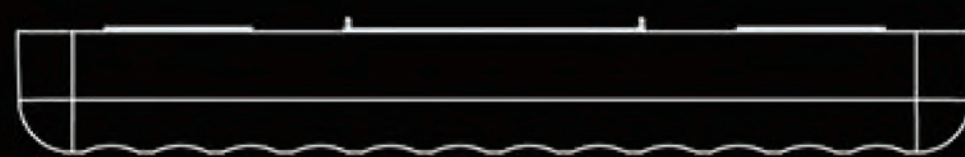

H:33mm

W:30mm

### Colour Options



Indoor  
use only



IP40

IP rating



Different  
light colors



Excellent  
thermal  
management



Excellent  
visual  
comfort

# MODULE

## Adjustable Spot Light



### MM30 Spotlight Module

#### Specification

Material	Aluminium
Input	DC48V
Power	8W
Beam Angle	15°/24°/36°
CCT.	2700K/3000K/3500K/4000K 2700K~6000K
Ra	≥90

MM30-02-01



L: 129.5mm




H: 65.5mm

W: 31mm

#### Colour Options



Indoor use only



IP rating




Different light colors



Excellent thermal management



Excellent visual comfort

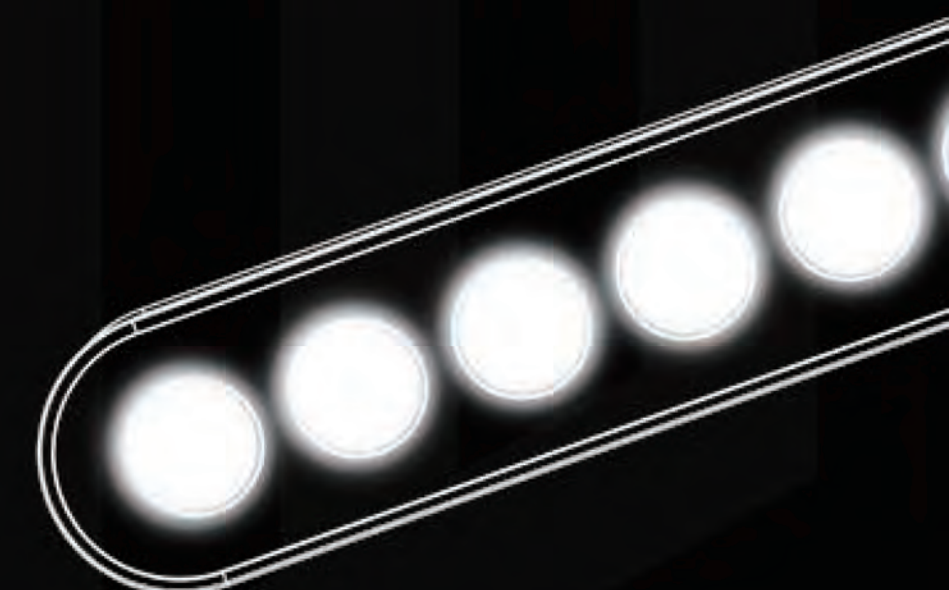



# MODULE

## Track Spot Light



### MM30

#### Track Light Module

#### Specification

Material	Aluminium
Input	DC48V
Power	8W
Beam Angle	15°/24°/36°
CCT.	2700K/3000K/3500K/4000K
	2700K~6000K
Ra	≥90

#### Colour Options



MM30-05-01



L: 125.5mm



Φ48mm

H: 181.5mm



Indoor use only



IP rating



Different light colors



Excellent thermal management



Excellent visual comfort

For more information:

[CWOODCRAFT.COM](http://CWOODCRAFT.COM)

**CW Woodcraft® | LUX<sup>2</sup>**

Magnetic Track Lighting Integration

# MODULE

Pendant Light



Mm30  
Pendant Module

MM30-06-01



Φ 85mm



H: 90mm



## Specification

Material	Aluminium
Input	DC48V
Power	8W
Beam Angle	15°/24°/36°
CCT.	2700K/3000K/3500K/4000K 2700K~6000K
Ra	≥90

## Colour Options



Indoor  
use only



IP rating



Different  
light colors



Excellent  
thermal  
management



Excellent  
visual  
comfort

# MODULE

## Pendant Light



MM30-06-02 3W



Φ50mm

H:125mm  
(including cable)

MM30-06-03 6W



Φ60mm

H:125mm  
(including cable)

MM30-06-04 9W



H:125mm  
(including cable)

### Mm30 Pendant Module

#### Specification

Material	Aluminium
Input	DC48V
Power	3W / 6W / 9W
Beam Angle	110°
CCT.	2700K/3000K/3500K/4000K
	2700K~6000K
Ra	≥90

#### Colour Options



Indoor  
use only



IP rating



Different  
light colors



Excellent  
thermal  
management



Excellent  
visual  
comfort