

UNDERCOUNTER GLASSWASHERS  
GC SERIES






HOBART UK,  
SOUTHGATE WAY,  
ORTON SOUTHGATE,  
PETERBOROUGH.  
PE2 6GN  
0844 888 7777

www.hobartuk.com

Undercounter Glasswasher with Reverse Osmosis Unit

GCPROIW-10B

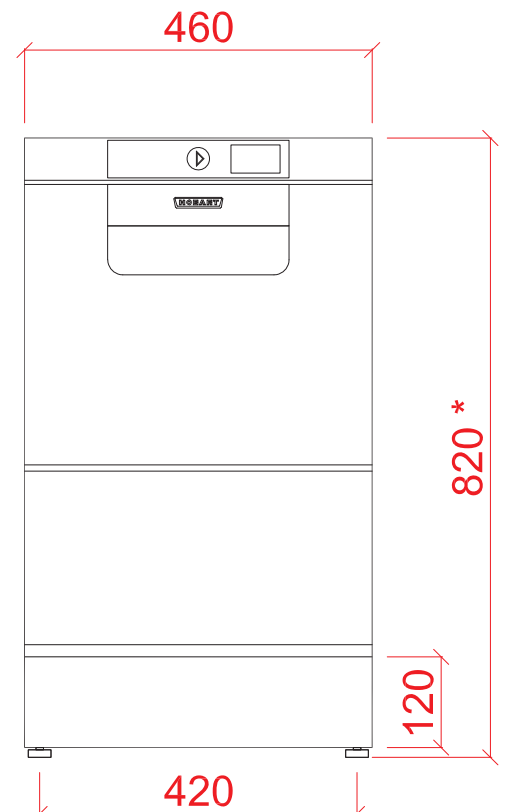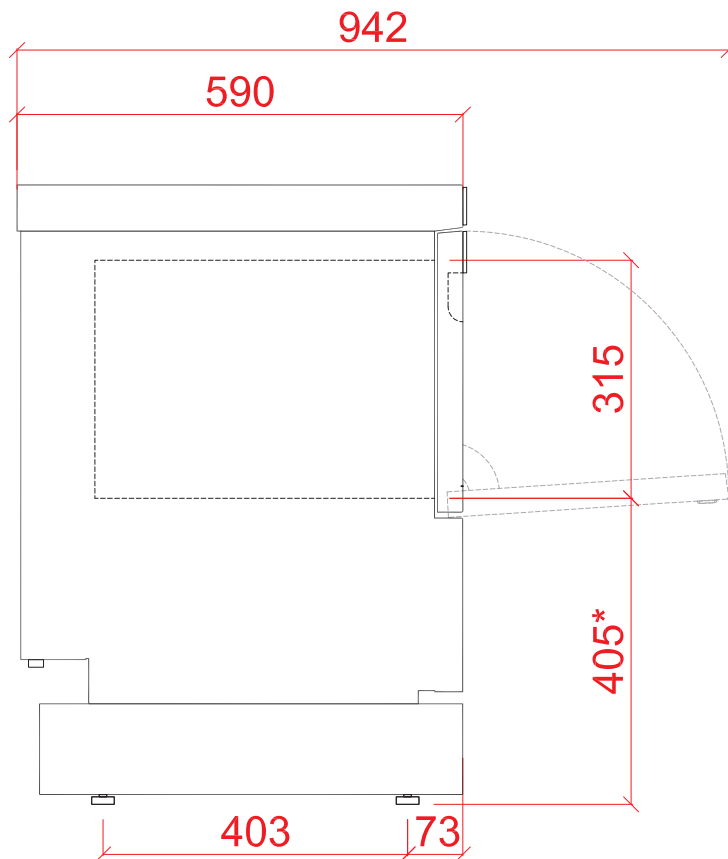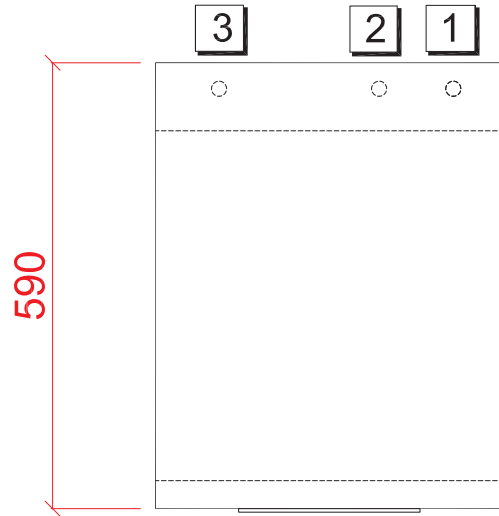

1 Water	2 Drain	3 Electric
<p>22mm CONNECTION VIA 2 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY 55°C TO 60°C (0°- 3°CLARK MAX) @ 0.5 TO 10.0 BAR MAX. INITIAL TANK FILL 8 LITRES.</p> <p>RINSE WATER USAGE 1.9 LITRES PER CYCLE. MAX USAGE 110 LITRES PER HOUR.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AB' AIR GAP AS STANDARD</p>	<p>DRAIN - 1.75 METRE FLEXIBLE HOSE TO A 40mm TRAPPED STANDPIPE 600mm MAX A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p>	<p>4.8kW 400/50/3 FUSED AT 3 x 16amps MACHINE SUPPLIED WITH 2.0 METRES OF CABLE</p> <p><b>CONFIGURABLE TO:</b></p> <p>5.6kW 230/50/1 FUSED AT 25amps</p> <p>ELECTRICS FOR ROI ARE THROUGH DISHWASHER.</p>
	Other Services	Notes
	<p>RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.</p> <p>DETERGENT HOSE - 2.5 METRE FLEXIBLE.</p>	<p>APPROX WEIGHTS: EMPTY: 50kg's WITH WATER: 64kg's Height * +40mm -0mm</p>

PLOT SCALE: 1:10

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED