

SbS8% 1010

Heat spreader for RF device

Dimension

- Width : 10.16mm
- Length : 10.16mm
- Thickness : 1mm

Features

- High Thermal Conductivity



Product Inquiry

List

Specification


Properties	Values
TC _{xy} (W/mK)	376
TC _z (W/mK)	348
CTE (ppm/K) @ 800°C	6.95
Electrical Conductivity (%IACS)	93.6
Density (g/cm ³)	9.06
Tensile Strength (Mpa)	249

※ TC_{xy} represents the thermal conductivity (TC) in the plane direction of the heat spreader, that is, the x-axis and y-axis directions, and TC_z represents the thermal conductivity in the thickness direction of the heat spreader.


Product Properties

The values in the tables and graphs guide the material properties in a wide range to explain TGS products. COC (Certificate of Conformance) will be issued after confirming the detailed specification.


◆ Thermal Conductivity (TC)

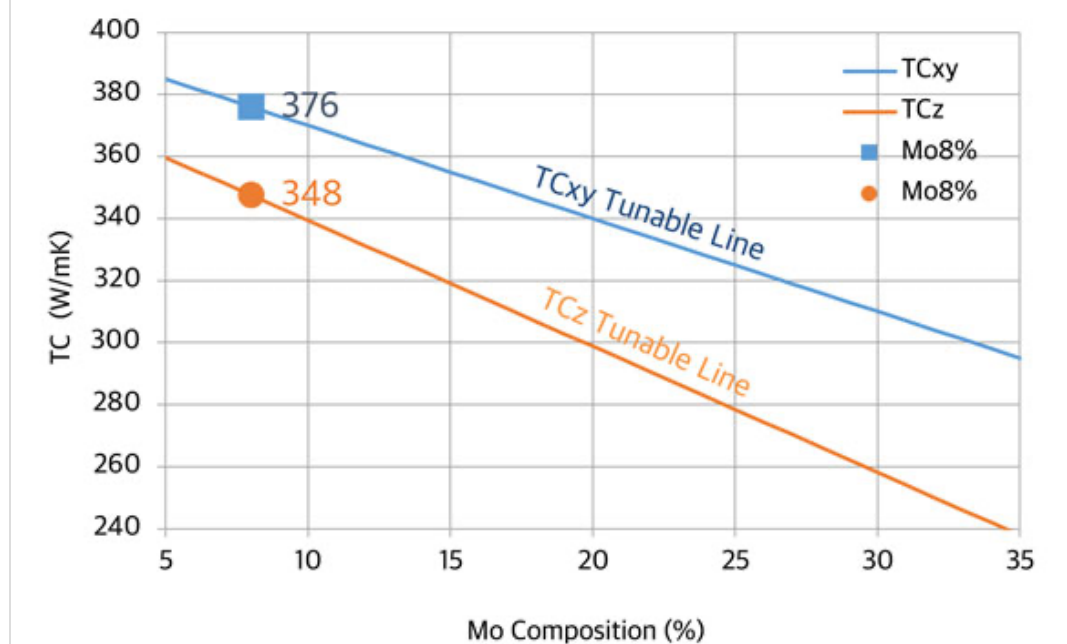


◆ Coefficient of Thermal Expansion (CTE)

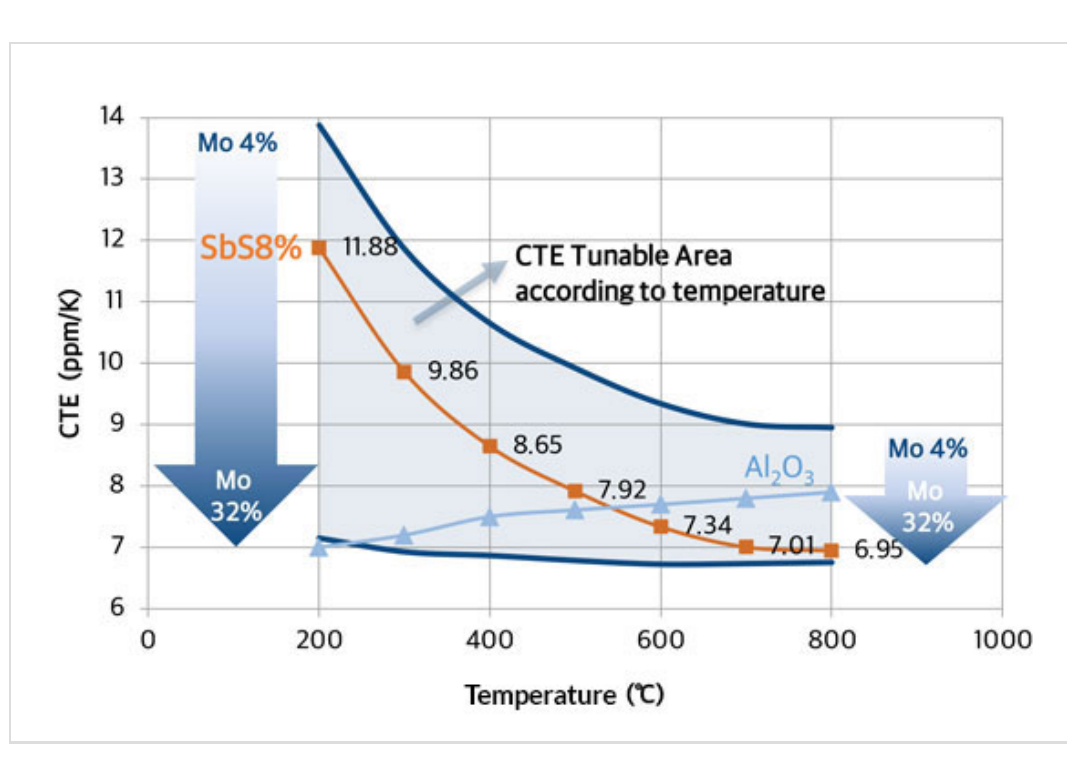

◆ Electrical Conductivity (EC)

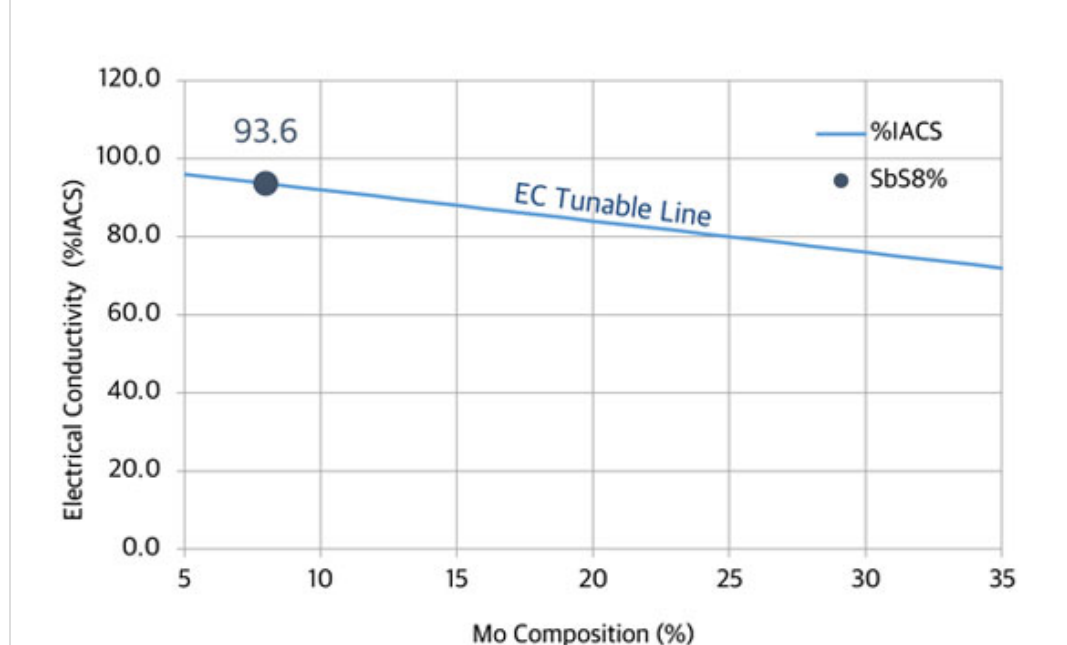

◆ Density

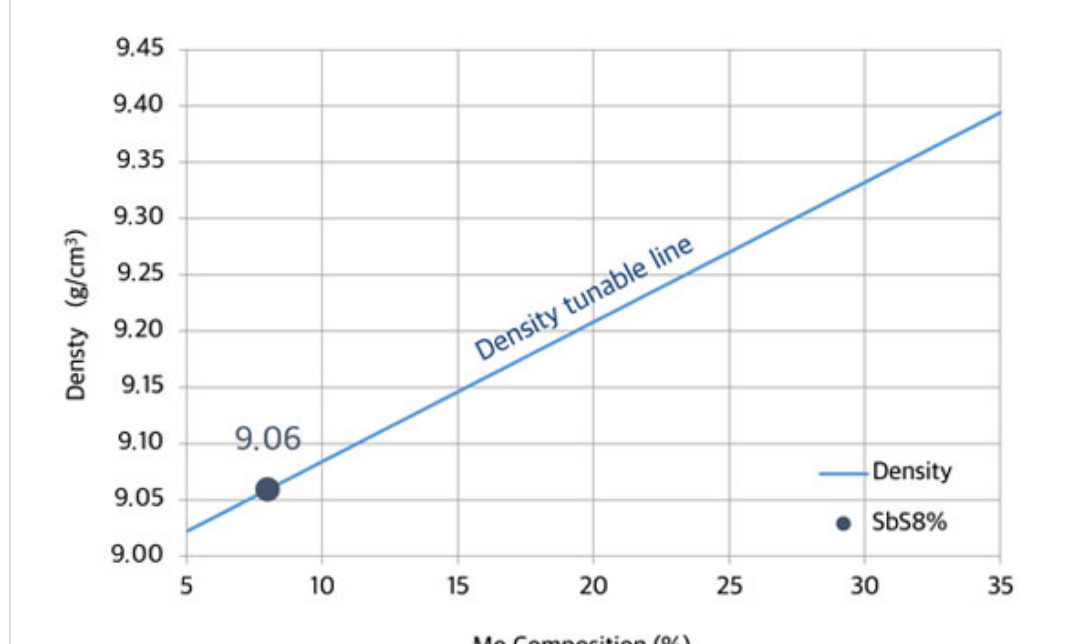

◆ Tensile Strength (TS)

