

Monaco glassfiberbasseng 650-750-850-1000



Monaco 650

Utvendig lengde: 6,50 meter
Utvendig bredde: 3,30 meter
Innvendig lengde: 6,25 meter
Innvendig bredde: 3,00 meter
Dybde: 1,50 m
Overflate: 18,50 kvm
Volum: 18,60 m³
Vekt: 630 kg

Monaco 750

Utvendig lengde: 7,50 m
Utvendig bredde: 3,70 m
Innvendig lengde: 7,18 m
Innvendig bredde: 3,38 m
Dybde: 1,50 m
Overflate: 24,40 kvm
Volum: 25,90 m³
Vekt: 900 kg

Monaco 850


Utvendig lengde: 8,50 m
Utvendig bredde: 3,70 m
Innvendig lengde: 8,18 m
Innvendig bredde: 3,38 m
Dybde: 1,50 m
Overflate: 27,70 kvm
Volum: 30,10 m³
Vekt: 1000 kg

Monaco 1000


Utvendig lengde: 10,00 m
Utvendig bredde: 3,70 m
Innvendig lengde: 9,68 m
Innvendig bredde: 3,38 m
Dybde: 1,50 m
Overflate: 32,80 kvm
Volum: 36,30 m³
Vekt: 1250 kg



AQUA BLUE



STEEL GRAY

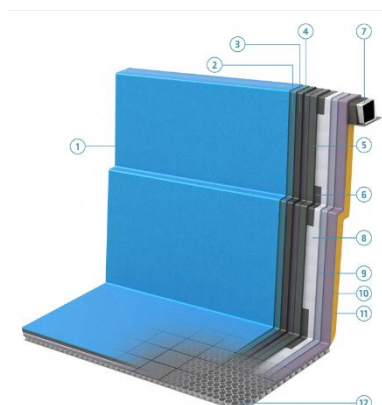

- 1 GELCOAT LAYER 1
first color tone with UV & osmose protection
- 2 GELCOAT LAYER 2
second color tone with additional osmose protection properties
- 3 VINYLESTER GELCOAT LAYER
provides maximum resistance to chemicals and solvents
- 4 VINYLESTER GELCOAT LAYER 2
reinforced by fiberglass
- 5 VINYLESTER GELCOAT LAYER 3
has special osmose reinforcement
- 6 RHINO CARBON SKIN
extra carbon fiber reinforcement layer that is applied to key places to increase rigidity
- 7 LAMINATED STEEL BEAM
for osmose stability and rigidity
- 8 STRUCTURAL FIBERGLASS LAYER 1
- 9 STRUCTURAL FIBERGLASS LAYER 2
- 10 STRUCTURAL FIBERGLASS LAYER 3
- 11 PU FOAM
thermal insulation layer
- 12 STRUCTURAL HONEYCOMB LAYER
extra protection for pool flooring