

# CF-4

**Bomba centrífuga para piscina**  
*Centrifugal pump for swimming pool*  
Pompe de piscine centrifuge

efficiency class

**IE3**

1.450 r.p.m



- ✓ **Fabricada íntegramente en fundición de hierro**  
*Made entirely in full cast iron*  
Entièrement en fonte
- ✓ **Eje en acero inoxidable AISI-316**  
*AISI-316 stainless steel shaft*  
Manche en acier inoxydable AISI-316
- ✓ **Sello mecánico en carbón-carburo de silicio**  
*Mechanical seal in carbon-silicium carbide*  
Guarniture mécanique en carbure de silicium
- ✓ **Prefiltro de grandes dimensiones**  
*Large Prefilter*  
Grand préfiltre
- ✓ **Turbina en bronce bajo demanda**  
*Bronze impeller on demand*  
Turbine en bronze sur demande





Compatible con variador [e]POOL + soporte pared  
*Compatible with [e]POOL inverter + wall support*



- Conexión brida desde DN-65 a DN-125     *Flange connection from DN-65 to DN-125*     *Raccordement à bride de DN-65 à DN-125*
- Cesto prefiltro fabricado en AISI-316     *Prefilter basket made of AISI-316*     *Panier de préfiltre en AISI-316*
- Ejes de motor y bomba unidos mediante acoplamiento     *Motor and pump shafts connected by coupling*     *Moteur et pompe reliés par accouplement*
- Tornillería en acero inoxidable AISI-316     *Stainless steel screws AISI-316*     *Vis en acier inoxydable AISI-316*
- Motor normalizado IE3 a 1450 rpm (1750 rpm @ 60 Hz)     *IE3 standardized motor at 1450 rpm (1750 rpm @ 60 Hz)*     *Moteur normalisé IE3 à 1450 tr/min (3450 tr/min @ 60 Hz)*
- Rodamientos lubricados de por vida     *Lubricated bearings for life*     *Roulements lubrifiés à vie*
- Grado IP-55, Aislamiento clase F     *IP-55 Grade, Class F Insulation*     *Isolation IP-55, classe F*

Datos Técnicos / Technical data / Données techniques

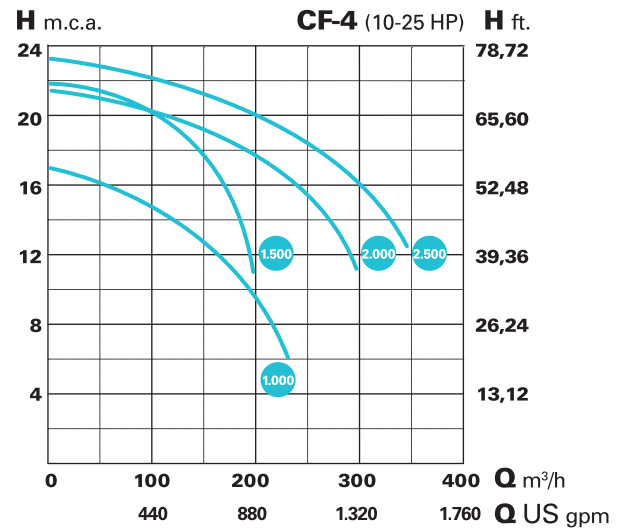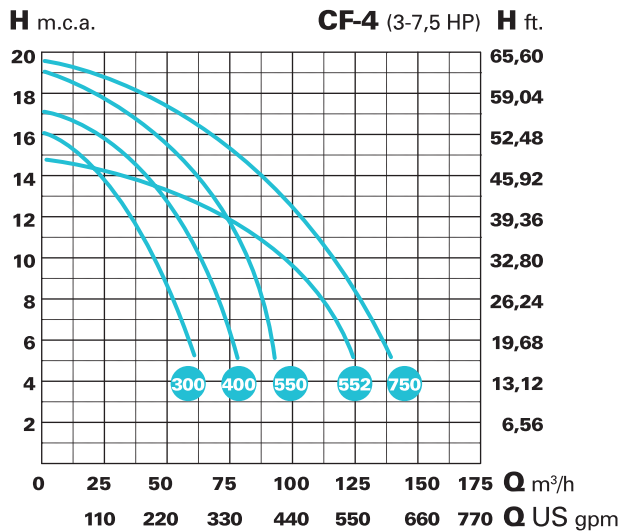

Tipo / Type	HP	KW	A		Altura manométrica m.c.a. / Manometric height w.c.m.										Ø DNA	Ø DNI	
			230V	400V	9	10	12	14	15	16	18	20	21				
CF-4 300	3	2,2	9,4	5,3	54	50	44	30	20	-	-	-	-	-	-	DN65	DN50
CF-4 400	4	3	12,5	6,9	-	70	67	50	36	20	-	-	-	-	-	DN80	DN65
CF-4 550	5,5	4	17	9,2	-	-	84	72	66	54	20	-	-	-	-	DN80	DN65
CF-4 552	5,5	4	17	9,2	120	110	78	28	-	-	-	-	-	-	-	DN100	DN80
CF-4 750	7,5	5,5	23	12	-	-	124	104	90	72	-	-	-	-	-	DN100	DN80
CF-4 1000	10	7,5	-	15,5	-	210	175	130	90	60	-	-	-	-	-	DN125	DN100
CF-4 1500	15	11	-	21,8	-	-	215	200	190	180	150	120	60	-	-	DN125	DN100
CF-4 2000	20	15	-	32	-	-	320	300	275	260	210	102	-	-	-	DN150	DN125
CF-4 2500	25	18,5	-	39	-	-	-	360	340	310	280	220	190	-	-	DN150	DN125