Universal Audio Cassette Receiver with Microphone Quick Start Guide

Aluratek

Package Contents

Your order has been carefully packaged and inspected. The following accessories should be included in your package. Please inspect the contents of the package to ensure that you have received all items and that nothing has been damaged. If you discover a problem, please contact us immediately for assistance.



aluratek.com

qsg Q10632 Copyright © 2022 Aluratek, Inc. All Rights Reserved.

Operation

Charging The Battery

The battery is not fully charged and it is highly recommended that you charge ABCTM02F before you begin using it.

Note: Using ABCTM02F "out of the box" will not harm the device.

You will experience reduced battery life as the unit will not be fully charged. Connect the larger USB end of the cable provided to your PC or USB power adapter (not included) and the smaller Micro USB to the charging port of ABCTM02F. Please charge the battery for a minimum of (2) hours. The red LED will be on while charging. When charging is complete, the red LED will turn off.

Operation

Control Functions

Function	Operation	LED indicator
Power ON	Press and hold Power button for 3-5 seconds	Blue LED - 1 second
Power OFF	Press and hold Power button for 3-5 seconds	Red LED - 1 second
Pairing	Ensure ABCTM02F is turned OFF. Press and hold Power button for 6-7 seconds until LED flashes red and blue alternately	LED flashes red and blue alternately

Radio and TV Interference Statement

WARNING!!! This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by whatever measures may be required to correct the interference.

Warranty

Aluratek warrants this product against defect in material or workmanship for **1 YEAR** from the date of purchase.


This warranty becomes invalid if the factory-supplied serial number or "warranty void" sticker has been removed or altered on the product.

This warranty does not cover: A) Cosmetic damage or damage due to acts of God B) Accident, misuse, abuse, negligence or modification of any part of the product. C) Damage due to improper operation or maintenance, connection to improper equipment, or attempted repair by anyone other than Aluratek. D) Products sold AS IS or WITH FAULTS.

IN NO EVENT SHALL ALURATEK'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, IT'S ACCOMPANYING SOFTWARE, OR IT'S DOCUMENTATION.

Aluratek makes no warranty or representation, expressed, implied, or statutory, with respect to it's products, contents or use of this documentation and all accompanying software, and specifically disclaims it's quality, performance, merchantability, or fitness for any particular purpose. Aluratek reserves the right to revise or update it's product, software or documentation without obligation to notify any individual or entity.

Product Highlights

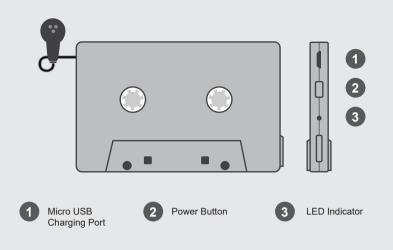

Operation

Note: The pairing mode will last 5 minutes. ABCTM02F will turn off automatically if no devices can be connected within 5 minutes.

Pairing with the transmitter such as iPhone, smartphone, and tablet:

Please make sure the device supports A2DP profile. The pairing procedure will vary depending on the actual device. Please refer to the user guide of your device for detail instruction. The general pairing procedures are as follows:

1. Make sure ABCTM02F is turned Off.

2. Activate ABCTM02F pairing mode by press and hold the power button for 6-7 seconds.

3. Activate your device's Bluetooth function and set your device to search for Bluetooth devices. Select ABCTM02F when it is found.

4. For transmitter with Bluetooth version 2.1, you will not need to input a code. If you are prompted for PIN, please enter "0000".

5. If prompted by your device to connect, please select "Yes".

6. After connecting successfully, the blue LED will flash once every 3 seconds.

Note: Please make sure the audio output is set to Bluetooth / ABCTM02F for audio streaming from the device

Technical Support

If you need further assistance, please contact the Aluratek support department for troubleshooting prior to returning this device.

E-mail: support@aluratek.com Web: www.aluratek.com/helpdesk Local (Irvine, CA): 714-586-8730 Toll free: 1-866-580-1978