



Stores: ChelinoBaby – Ormonde – JHB  
ChelinoBaby – Fourways – JHB  
ChelinoBaby – Woodmead Square – JHB  
ChelinoBaby – Greenstone – JHB  
ChelinoBaby – Centurion – Pretoria  
ChelinoBaby – Menlyn – Pretoria  
ChelinoBaby – Kolonnade – Pretoria  
ChelinoBaby – Gateway – Durban  
ChelinoBaby – Cavendish Square – Cape Town  
ChelinoBaby – Nelspruit – Mpumalanga  
ChelinoBaby – Online – [www.chelinobaby.co.za](http://www.chelinobaby.co.za)



Imported for :

ChelinoBaby Group of Companies.  
No. 12 Kimberlite Road , Theta Ext 5 ,  
Booyens Reserve , JHB , 2091. SA.  
Tel: +2711 8352520  
Info: [info@chelino.co.za](mailto:info@chelino.co.za)



## BLAZER III INSTRUCTION MANUAL



Please read the instruction manual  
before using the child car seat

Universal belted 40-105cm  
i-Size booster seat/100-150cm

## Notice

Notice regarding Universal Belted seat category Enhanced Child Restraint Systems (40-105cm)

This is Universal Belted Enhanced Child Restraint System.

It is approved according to UN Regulation No. 129, for use primarily in "Universal seating positions" as indicated by vehicle manufacturers in the vehicle user's manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Notice regarding i-Size booster seat category Enhanced Child Restraint Systems(100-150cm)

This is a i-Size booster seat Enhanced Child Restraint System. It is approved according to UN Regulation No. 129/03, for use primarily in "i-Size seating positions" as indicated by vehicle manufacturers in the vehicle user's manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

**NOT TO USE REARWARD FACING ECRS IN SEATING POSITIONS WHERE THERE IS AN ACTIVE FRONTAL AIRBAG INSTALLED.**

**"IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 3 years (Refer to instructions)".**

## 1.WARNING


### IMPORTANT!

Please carefully read and make sure you understand all instructions in this manual and in the vehicle owner's manual related to child safety seats. Install and use the child safety seat as described in the instruction manual. Failure to do this could result in serious injury or death of your child. Keep the instructions together with the ECRS for future reference.


1. Make sure any straps holding the restraint to the vehicle should be tight. Any straps restraining the child should be adjusted to the child's body. Make sure straps should not be twisted.
2. Make sure that lap strap is worn low down, so that the pelvis is firmly engaged to prevent child from falling out of the safety car seat.
3. Make sure that the ECRS is changed when it has been subject to violent stresses in an accident.
4. Make sure the rigid items and plastic parts of a ECRS shall be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
5. DO NOT make any alteration or additions to the ECRS without the approval of the Type Approval Authority, and a danger of not following closely the installation instructions provided by the ECRS manufacturer.
6. HOT! The child seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.

7. DO NOT leave your child unattended in this restraint for a short time.
8. Make sure any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.
9. A) DO NOT use the ECRS system without the cover. B) DO NOT replace seat cover with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
10. DO NOT use the ECRS system if position of the adult safety-belt buckle to the main load bearing contact points on the restraint is unsatisfactory, please contact the manufacture in doubt about this point.
11. DO NOT use any load bearing contact points other than those described in the instructions and marked in the ECRS. please contact the manufacture in doubt about this point.

## 2. Structure name

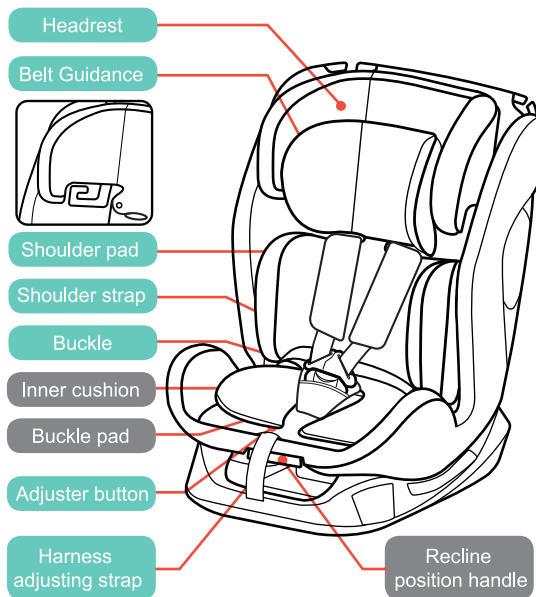


Notice: Inner cushion is suitable for child height of 40-75cm.

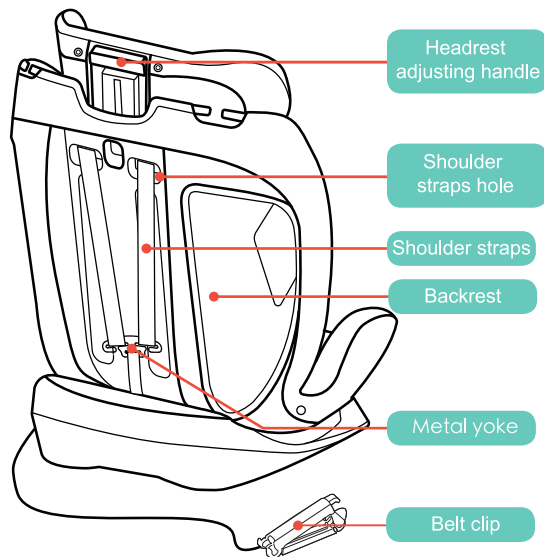

Take care of all spare part, any lost make sure to contact with manufacturer, The parts lack of damaged baby car seats are not allowed to use.

### 3.Installation position

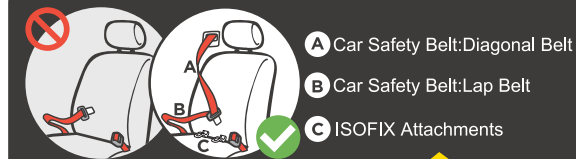

This ECRS system is suitable for seat belt that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point seat belts.



The suitable location for installation on the car is shown on the left:


- ⊘ Not allowed to install child car seat.
- ✓ Safe to install child car seat.
- A Only with 3-point seat belt can install in this place.
- B When front the of the seat with opened dairbag, cannot install in this place.

#### 4.Installation with adult safety-belt (40-105cm)

Rearward Facing:

Child height 40cm-105cm


Child weight ≤ 18kg




Recline the seat to position '4'.




Put the child seat on installation position with rearward facing.




Unlock the harness and lift up the inner cushion.



Pull out the seat belt entirely.




Pass the seat belt through the seat as shown.




Pass the seat belt through the seat as shown, put the inner cushion back.




Insert the metal tongue of car belt into the car seat buckle until you hear a clear "click".



Pull the belt tightly.



Using the belt clip to clip it beside the buckle.




Please check by moving the child seat back and forth to make sure every strap is tightly




Tips: Before using the safety seat, make sure the safety seat is firmly installed. The webbing is not twisted.


## 5. Using 5 point harness to fix child




While pressing the harness adjustment button, pull completely the two shoulder harnesses of the child restraint.



Place the child in the child restraint and pass both arms through the harnesses.




Important: The left and right bolts of the 5-point safety seat buckle are combined first.




Engage the buckle as pictures show.




One side of 5-point safety seat buckle was locked is not allowed.




Make sure the buckle is properly engaged.



Pull the retractor belt to the right tightness.



Make sure the space between the child and the shoulder harness is about the thickness of two fingers.



Press the red button to disengage the buckle.

The style of the buckle may vary, depending on the actual receipt.




**Warning:**  
Over-relaxed seat belts are not conducive to protecting children's safety.

## 6. Installation with adult safety-belt (100-150cm).


Forward Facing:

Child height 100cm-150cm

i-Size Booster seat




Recline level adjust to level 1,2 or 3.




Place child safety seat in car seat. Pull out the seat belt entirely.





Shoulder belt must pass through shoulder belt guide. Waist belt must pass through lap belt guidings.




When installing and adjusting the safety belts, make sure that both the shoulder belt and waist belt are not twisted and will not keep the safety belts from being properly positioned. Note the correct belt position should be above the child's pelvis.



## 7. Recline adjustment





Find the adjust hand lever, pull it up to adjust the position.

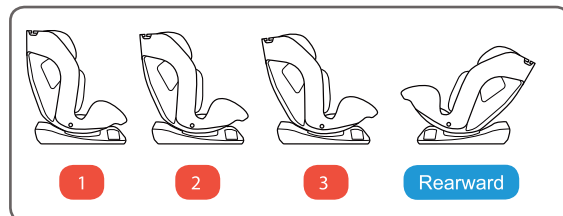

Rearward Facing: Child height 40cm-105cm / Child weighs  $\leq 18$ kg; The safety seat only provide one position for rearward installation.  
Forward Facing: Child height 100cm-150cm Only could use position 1,2 or 3.


**IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions)**

## ► 8. Five point harness adjustment




Pass the harness adjustment button

To loosen




While pressing the harness adjustment button ,pull completely the two shoulder harnesses of child restraint.

To tighten




Pull down the adjustment webbing and adjust it to the proper length to make sure your child is snugly secured.

## 9.Head rest adjustment




Pull the headrest adjustment handle.




Move the headrest up or down to the appropriate height concurrently


## Checking the shoulder strap height



No-Too low



No-Too high



Yes-Correct


Make sure that the harness is on the same height as your child's shoulders. Otherwise, move the shoulder strap up or down to the correct slot.

## 10.Conceal the harness system(Suitable for child height 100cm-150cm)




Release the 5 - point buckle, pull up the headrest, turn up the back cushion.







Press the harness adjustment button and loosen the straps.




Lift the upper flap upward and pull the lower flap forward.




Store the shoulder harnesses and buckle in their storage compartments.



Remove the buckle bag.




Pull the buckle to the back of the seat pad, and then store buckle and buckle tongues in respective storage compartments.




Do reattach the snaps to recover the seat pad. The reassembled seat pad is shown as above picture.


## 11.Remove the seat cloth cover



Press the red button to disengage the buckle.




Remove the inner liner.




Remove the buckle pad, conceal the buckle in the buckle hole on the seat base.




Raise the back cushion under the headrest.




Pull up to take the should pad out from the hole.



Pull down to take should pad out. Lower the headrest cloth cover.



Remove the headrest cloth cover.



Remove the cloth cover all seats.

Seat cloth cover mounted: To assemble soft goods, reverse the steps above.

Warning: Child restraint system (safety seat) without cloth cover cannot be used.

## 12. Maintenance

### Safety seat maintenance

After removing foam of infant insert, please store it somewhere that the child can not access it.

- Please wash the soft goods with cold water under 30°C.
- Do not iron the soft goods.
- Do not bleach or dry clean the soft goods.
- Do not use undiluted neutral detergent, gasoline or other organic solvent to wash the child restraint. It may cause damage to child restraint.
- Do not twist the goods to dry with great force, it may leave the soft goods with wrinkles.
- Please hang dry the soft goods in the shade.



## ⚠ Warning

Child restraint system (safety seat) without cloth cover cannot be used.

### Safety seats save.


Please always check the seat parts are complete, the seat is in good condition to reduce the chance of accidents.  
Please remove the child restraint from the vehicle seat if not in use for a long period time. Put the child restraint in the shade and somewhere your child can not access it.  
Please do not leave the seat in a cold or hot, humid environment for long periods of time.  
Please keep this instruction well for checking.

### Post-accident treatment

In the event of a violent collision and accident, please replace it with a new seat. If you have any other questions, please contact the distributor or manufacturer.

Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications.

13.Dimension Info

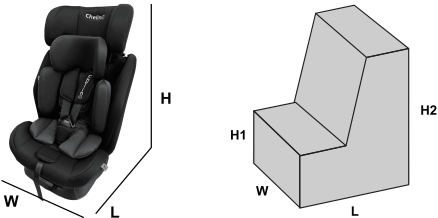

LENGTH	46 CM	CARTON LENGTH	52.5 CM
WIDTH	35 CM	CARTON WIDTH	44 CM
HEIGHT	77 CM	CARTON HEIGHT1	21.5 CM
		CARTON HEIGHT2	56.5 CM
WEIGHT	6.5 KGS		