

The EQ Series is the lighting solution that leaves compromise behind. From your home to your business, with EQ, there's no limit to the spaces that you can perfectly light. In a world of many choices, we have curated and perfected your favourites with the Unios formula - signature design, pro-grade performance, all at a compact price.

Unremarkably brilliant

Perfecting the essentials - the EQ Series is engineered to take the fuss out of specifying the right luminaires for your space. As the simplified option in the vast world of lighting, the EQ Series is guaranteed to meet all of your essential lighting needs while delivering the complete Unios package in design and performance - all at a compact price.

4 Different Models

From residential, multi-residential, to hospitality, there is an EQ for every scenario. With 4 models - Essential, Comfort, Tilt and Tracklight - the EQ Series offers versatile lighting solutions that effortlessly elevate your lighting design. Each model is available in the signature Unios Textured White (RAL9003) and Black (RAL9005) finish.

Performance


The EQ Series is equipped with CRI 90+ to deliver high colour accuracy to any space. True to its name, the EQ Comfort was designed to create the most comfortable of environments with a UGR<16. At the same time, through lens technology, the EQ Track Light offers absolute control over beam spread and the distribution of light on objects and surfaces.






EQ Essential

Downlight

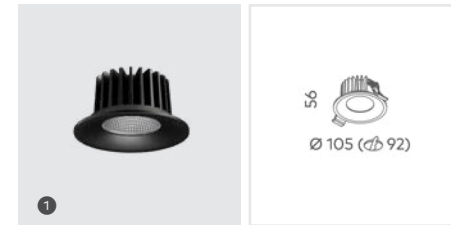

	LED Power	Lumens (at 3000K)	Beam	Weight
1 EQ Essential	10W (250mA)	853lm	60°	350g


Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen efficacy	Up to 92lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP44 (Room Side)	UGR	<19	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>59,000h L70B10		
		Insulation Rating	IC-4	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

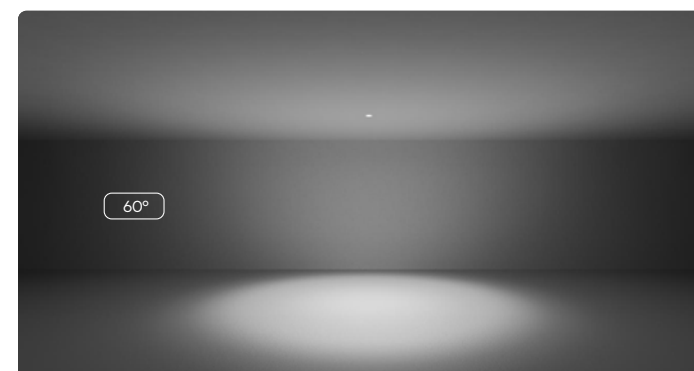




EQ Comfort

Downlight

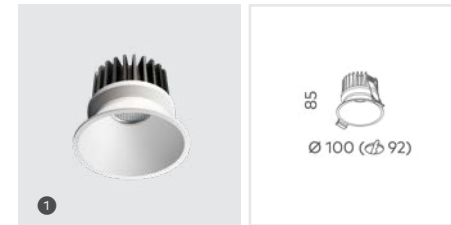

	LED Power	Lumens (at 3000K)	Beam	Weight
1 EQ Comfort	10W (250mA)	804lm	60°	350g


Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen efficacy	Up to 86lm/W	Phase Cut	Remote
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Material	Powder Coated Aluminium	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	IP Rating	IP44 (Room Side)	UGR	<16	Bluetooth	Remote
Warranty	5 Year	Class Rating	Class II	Lifetime (Ta 25°C)	>59,000h L70B10		
		Insulation Rating	IC-4	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

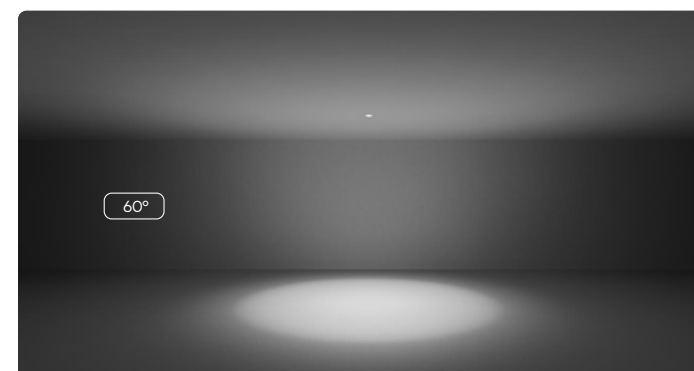




EQ Tilt

Downlight

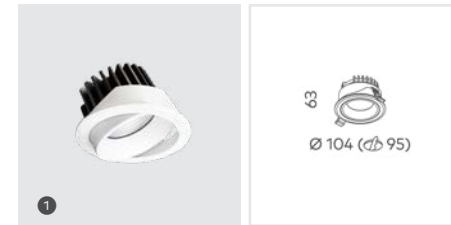

	LED Power	Lumens (at 3000K)	Beam	Weight
1 EQ Tilt	10W (250mA)	767lm	60°	350g


Key Information		Design		Performance		Driver	
Mounting	Ceiling Recessed	Product Family	EQ	Lumen efficacy	Up to 84lm/W	Phase Cut	Remote
Finish	<input checked="" type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	20° Tilt	CRI (Ra/R9)	90+ (R9: >50)	DALI	Remote
LED CCT	<input checked="" type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K	Material	Powder Coated Aluminium	UGR	<19	Bluetooth	Remote
Warranty	5 Year	IP Rating	IP44 (Room Side)	Lifetime (Ta 25°C)	>59,000h L70B10		
		Class Rating	Class II	Ambient Temperature Range	10°- 30°C		
		Insulation Rating	IC-4	SDCM	≤3		
				COI Compliance model requirements	4000K		

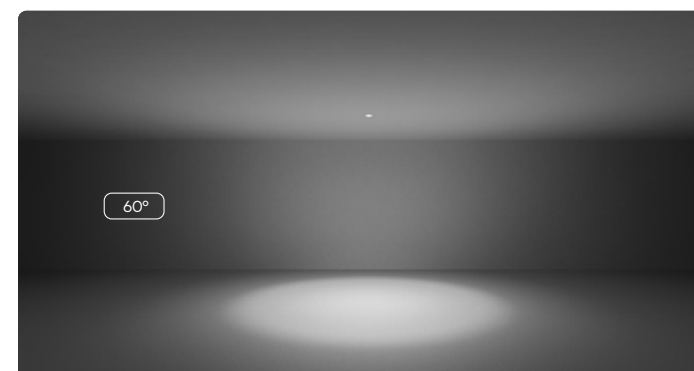



EQ

Tracklight

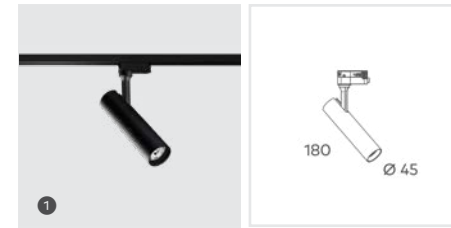

	LED Power	Lumens (at 3000K)	Beam	Weight
1 EQ Track	10W (250mA)	968lm	40°	370g

Key Information		Design		Performance		Track & Driver Compatibility	
Mounting	Track	Product Family	EQ	Lumen efficacy	Up to 103lm/W	Phase Cut	MX1 Built in, MX3 Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White	Adjustability	355° Rotation, 90° Tilt	CRI (Ra/R9)	90+ (R9: >50)		
LED CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Material	Powder Coated Aluminium	UGR	<19		
Warranty	5 Year	IP Rating	IP20	Lifetime (Ta 25°C)	>59,000h L70B10		
		Class Rating	Class I	Ambient Temperature Range	10°- 30°C		
				SDCM	≤3		
				COI Compliance model requirements	4000K		

