


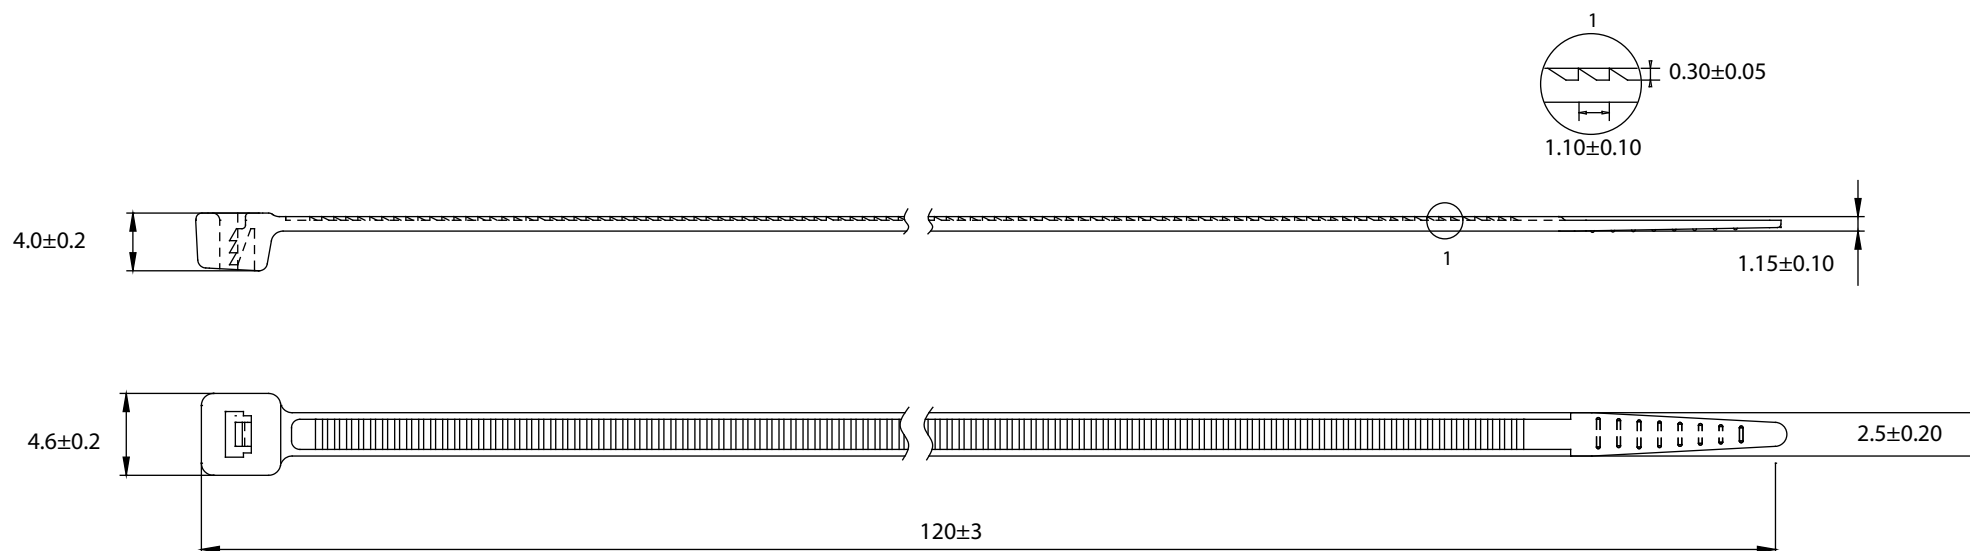

1. MATERIAL Natural: Polyamide 6.6 natural, Color ties' material will be Polyamide 6.6 natural + colorant

2. MATERIAL Black: Polyamide 6.6 natural+ ~1% carbon black

3. Flammability of raw material : UL 94 - V2

4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)

5. Installation temperature: -20° C ÷ +85° C


6. Working temperature: -40° C ÷ +85° C

7. Max sustainable temperature for short time: +110°C

8. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.

9. Carbon black addition gives a better UV resistance

10. Comply with UL62275, and EN62275

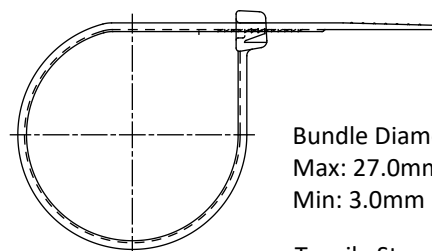

Bundle Diameter:

Max: 27.0mm

Min: 3.0mm

Tensile Strength: 8kgs (18lb)

Tolerance unspecified

mm (Inch)

X.XXX ±0.1 (0.004)

X.XX ±0.25 (0.010)

X.X ±0.5 (0.02)

X. ±1.0 (0.04)

ANGULAR ± 2°

