



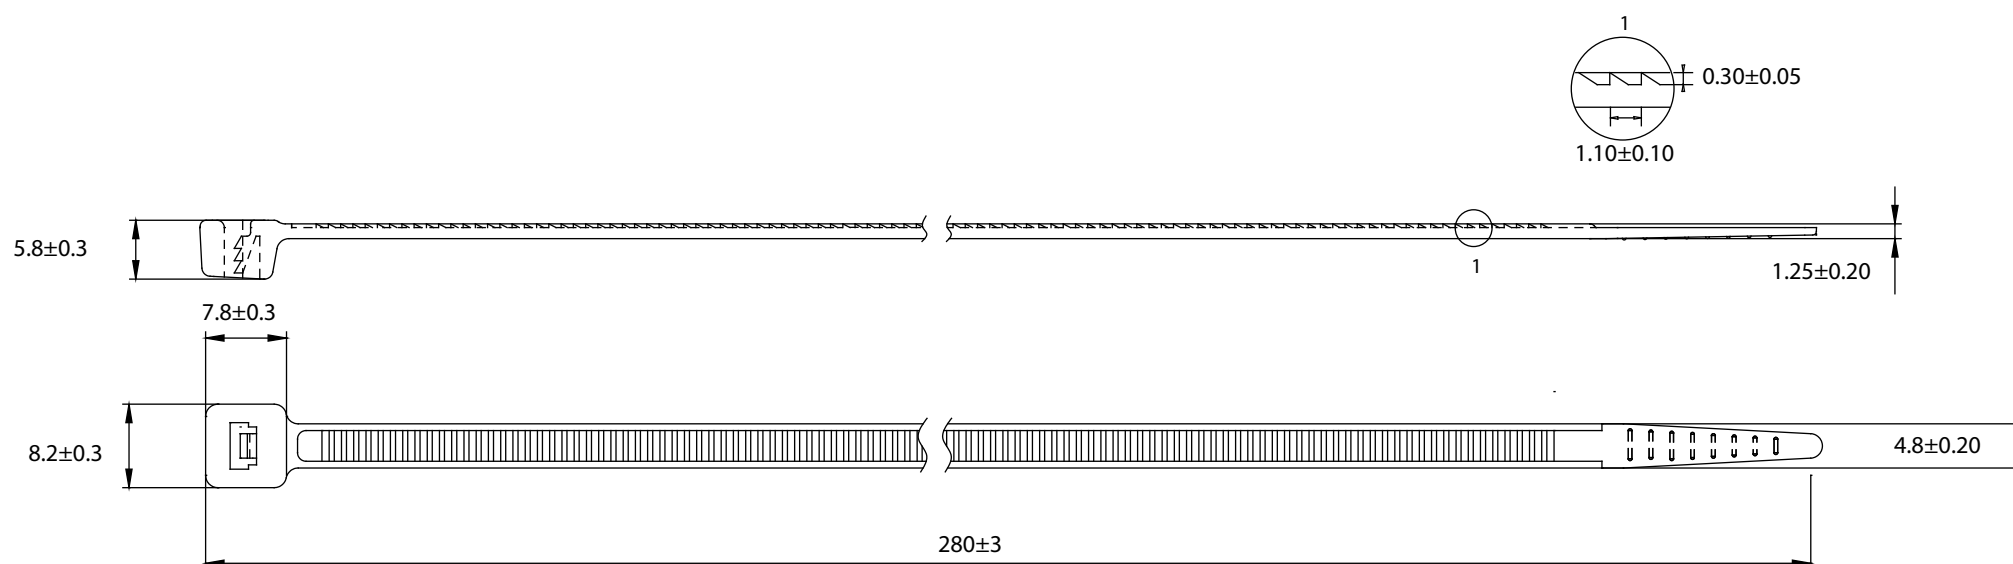

1. MATERIAL Natural: Polyamide 6.6 natural + Burgundy Colorant
2. Flammability of raw material : UL 94 - V2
3. Humidity absorption: 2,4% (23° C - 50% R.H.)
4. Installation temperature: -20° C ÷ +85° C
5. Working temperature: -40° C ÷ +85° C
6. Max sustainable temperature for short time: +110°C
7. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Commply with UL62275
9. Halogen Free, Plenum Rated AH-2

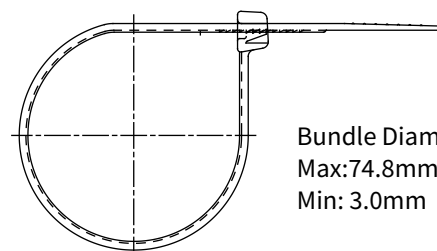

Bundle Diameter:
Max: 74.8mm
Min: 3.0mm

Tensile Strength: 23kgs (50lbs)

Tolerance unspecified
mm (inch)
X.XXX ± 0.1 (0.004)
X.XX ± 0.25 (0.010)
X.X ± 0.5 (0.02)
X. ± 1.0 (0.04)
ANGULAR $\pm 2^\circ$

