



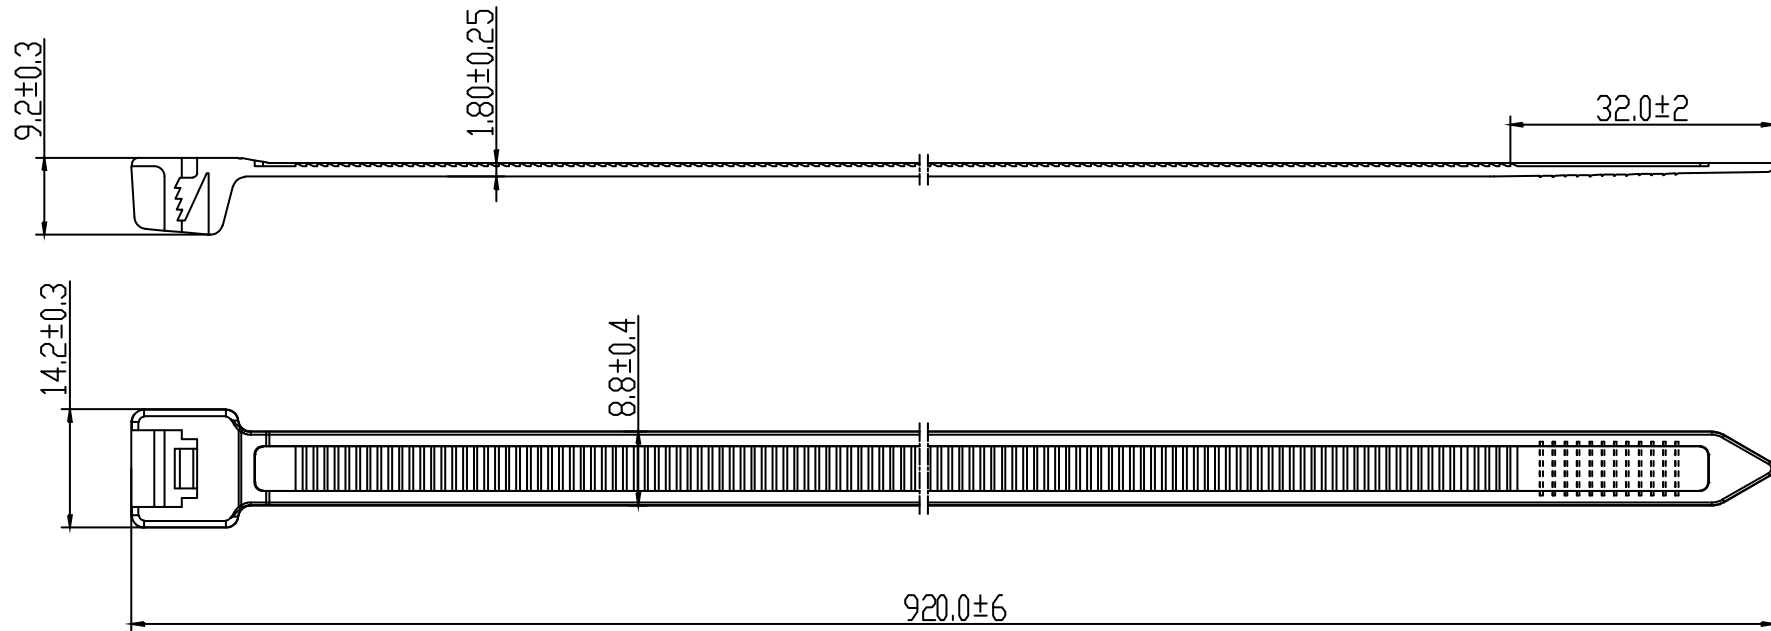

1. MATERIAL Natural: Polyamide 6.6 natural+ carbon black
2. Flammability of raw material : UL 94 - V2
3. Humidity absorption: 2,4% (23° C - 50% R.H.)
4. Installation temperature: -20° C ÷ +85° C
5. Working temperature: -40° C ÷ +85° C
6. Max sustainable temperature for short time: +110°C
7. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Commply with UL62275
9. Carbon black addition gives a better UV Resistance
10. Halogen Free, Plenum Rated AH-2

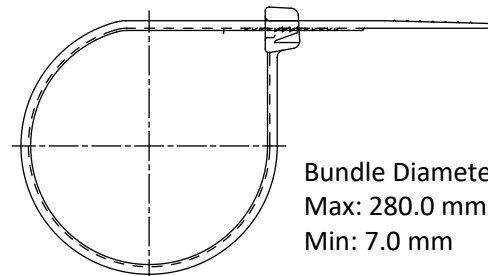

Bundle Diameter:
Max: 280.0 mm
Min: 7.0 mm

Tensile Strength: 800N (180LB)

Tolerance unspecified
mm (inch)

X.XXX	±0.1	(0.004)
X.XX	±0.25	(0.010)
X.X	±0.5	(0.02)
X.	±1.0	(0.04)

ANGULAR ± 2°

