



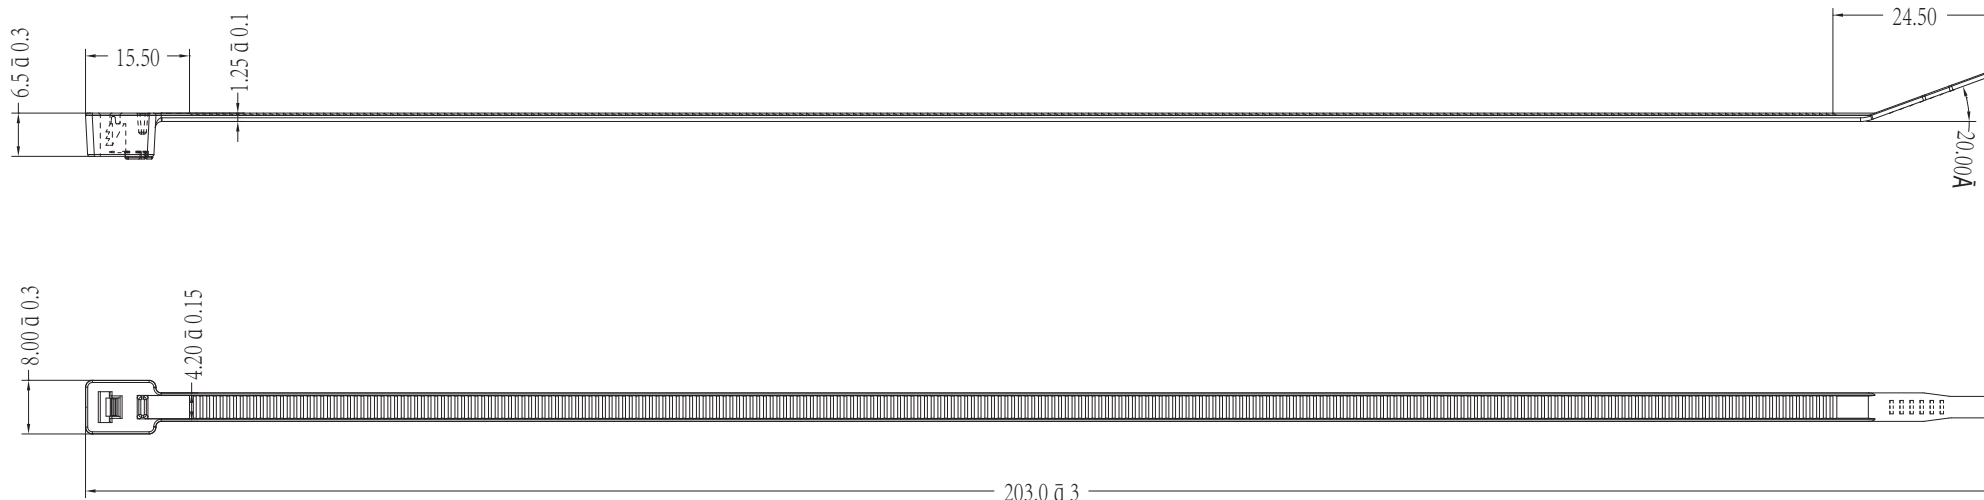

1. MATERIAL Black: Polyamide 6.6 natural+~1% carbon black
2. Flammability of raw material: UL 94 - V2 (Plenum Rated)
3. Humidity absorption: 2,7% - 2,8% (23°C - 50% R.H.)
4. Installation temperature: 0°C - +85°C
5. Working temperature: -40°C - +85°C
6. Max sustainable temperature for short time: +110°C
7. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Carbon black addition gives a better UV resistance
9. Comply with UL62275

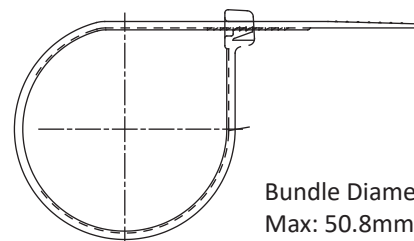

Bundle Diameter:

Max: 50.8mm

Min: 5.0mm

Tensile Strength: 22.7kgs (50lb)

Tolerance unspecified

mm (inch)

X.XXX ±0.1 (0.004)

X.XX ±0.25 (0.010)

X.X ±0.5 (0.02)

X. ±1.0 (0.04)

ANGULAR ± 2°

