



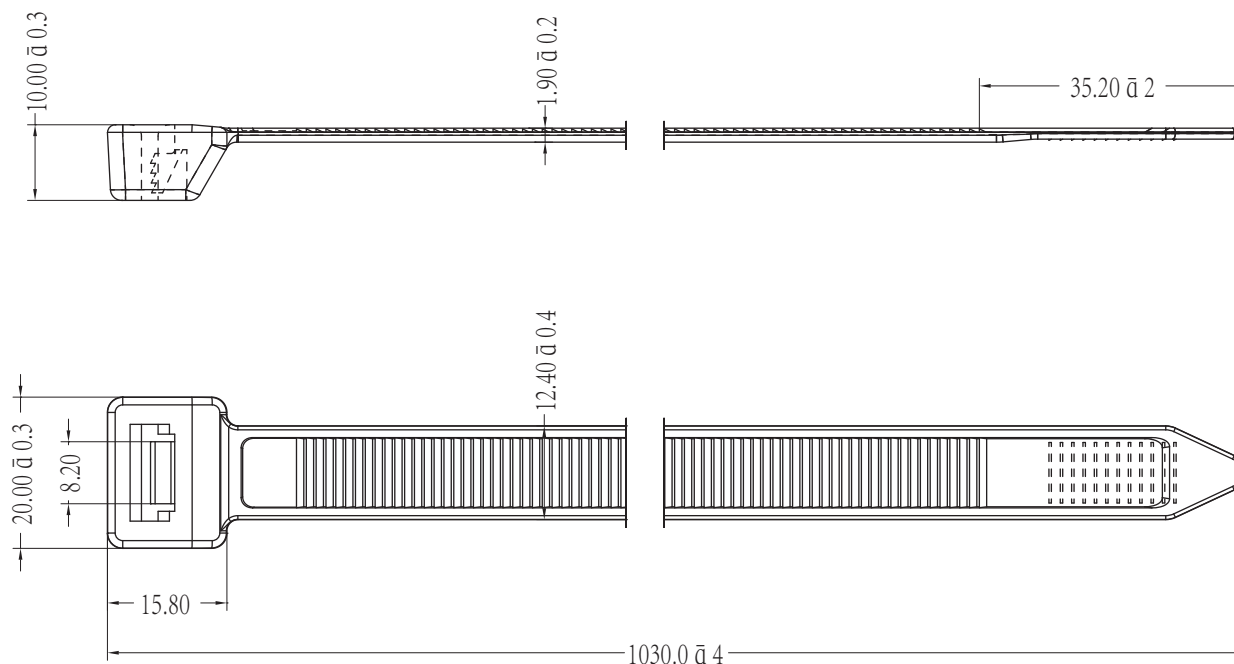

1. MATERIAL Black: Polyamide 6.6 natural+~1% carbon black
2. Flammability of raw material: UL 94 - V2 (Plenum Rated)
3. Humidity absorption: 2,7% - 2,8% (23°C - 50% R.H.)
4. Installation temperature: -20°C - +85°C
5. Working temperature: -40°C - +85°C
6. Max sustainable temperature for short time: +110°C
7. Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.
8. Comply with UL62275, and EN62275

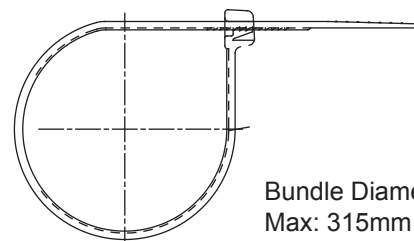

Bundle Diameter:
Max: 315mm
Min: 9.0mm

Tensile Strength: 113kgs (250lb)

Tolerance unspecified
mm (inch)
X.XXX $\pm$ 0.1 (0.004)
X.XX $\pm$ 0.25 (0.010)
X.X $\pm$ 0.5 (0.02)
X, $\pm$ 1.0 (0.04)
ANGULAR $\pm$ 2°

