




**Color :**  Ivory

**UPC Code :** 078477788257

**Country Of Origin :** Mexico

**NEMA :**  5-20R

**Available Colors :**

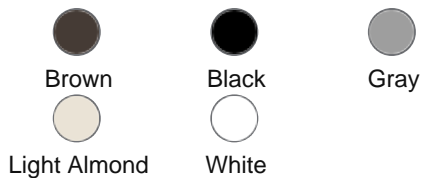

# 16342-I

20 Amp Decora Plus Duplex Receptacle/Outlet, Industrial Grade, Self-Grounding

Decora Plus Duplex Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Smooth Face, 20 Amp, 125 Volt, Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Ivory

**ROHS Compliant :** Yes

Leviton's line of Heavy-Duty Specification Grade receptacles are designed and manufactured to withstand the most demanding environments. Available in a wide variety of configurations, including isolated ground, tamper-resistant, etc., these Commercial Grade devices are the electrical contractor's choice for use in hotels, schools, hospitals and commercial office buildings.

## Technical Information

AC Horsepower Ratings

**At Rated Voltage :** 1 HP

Electrical Specifications

**Amperage :** 20 A

**Current Limiting :** Full Rated Current

**Dielectric Voltage :**  
Withstands 2000V per UL498

**Grounding :** Self-Grounding

**Pole :** 2-Pole

**Temperature Rise :** Max 30C  
after 250 cycles OL at 200  
percent rated current

**Voltage :** 125 VAC

**Wire :** 3-Wire

Environmental Specifications

**Flammability :** Rated V-2 per  
UL94

**Operating Temperature :** -40C  
to 60C

Material Specifications

**Body Material :** Thermoplastic  
Nylon

**Clamp Nuts :** Zinc-Plated Steel

**Color :** Ivory

**Face Material :** Thermoplastic  
Nylon

**Ground Clips :** Brass-Plated

**Grounding Screw :** Brass 8-32

**Line Contacts :** Brass Triple-  
Wipe .031 Thick

**Strap Material :** Zinc-Plated  
Steel

**Terminal Screws :** Brass 10-32

#### Mechanical Specifications

**Product ID** : Ratings are permanently marked on device

**Screw Terminal Torque** : 14-18 in-lbs

**Terminal Accom.** : 14-10 AWG

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

**Termination** : Side Wire

#### Product Features

**Brand** : Decora Plus

**Color** : Ivory

**Device Type** : Duplex Receptacle Outlet

**Feature 4** : Smooth Face

**Grade** : Commercial Specification Grade

**Grounding** : Self-Grounding

**NEMA** : 5-20R

#### Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File LR-406

**NEMA** : WD-1 & WD-6

**NOM** : 057

**UL498** : File E13399

**Warranty** : 10-Year Limited

#### **Patents \***

MX321216

US8684771

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

#### **Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S. T. Monday-Friday): +1-800-824-3005

#### **Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 · FAX: +1-800-824-3005 ·

#### **Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

#### **Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

**© 2025 Leviton Manufacturing Co., Inc.**