



4FT Vapor Tight Fixture

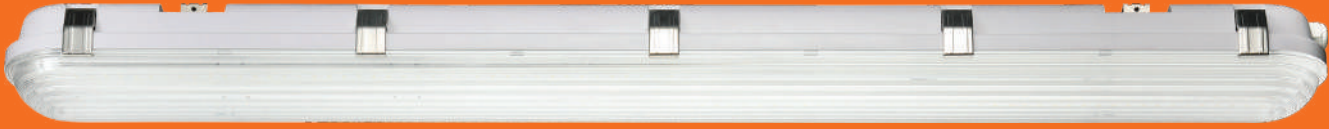

Specification

Model No.	Power	Input Voltage	Dimming	Brightness	CCT	L x W x H
J5236KLDB-45W-40	45W	120-347V	0-10V	5850LM	4000K	47.2" x 4.9" x 3.6"
J5236KLDB-45W-50					5000K	
J5236KLDX-DU45W-3CCT					4000K-5000K-6500K Adjustable	

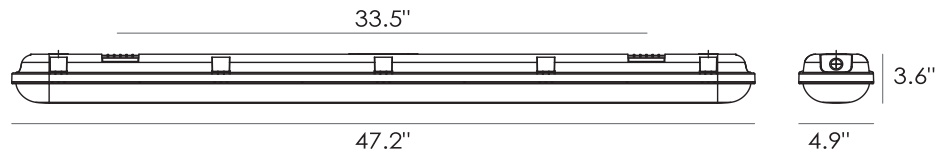

General Characteristics

- Fixture Life Hours
- Material
- Bulb
- Lumens Per Watt (LPW)

Safety Rating

- Ingress Protection
- Dimmable
- Dimming Type

Fixture Characteristics

- Shape
- Number of Lights
- Mounting
- Use Location

Electrical Characteristics

- Watts
- Volts
- Power Factor
- Operating Temperature

Light Characteristics

- Brightness
- Color Accuracy (CRI)
- Beam Angle

Product Dimensions

- Item Dimensions (in)

70000 Hours
PC
Integrated LED
130.00

cULus Listed- Wet Location
IP65
True
0-10V

Linear
1 – Lighter In series
Surface
Outdoor / Indoor

45 W
120-347V
0.95
(-)25 To 50°C

5850 Lumens
80
°110

(L) 47.2 (W) 4.9 (H) 3.6

