





| | | | | |
|-------------------------------------|--|--|------------------------------|----------------------------|
| Product designation | | | LED elements steady light | |
| Product type designation | | | 8LM2TL | |
| General characteristics | | | | |
| Colour | | | Red | |
| Electrical characteristics | | | | |
| Rated frequency | | | Hz | 50/60 |
| Supply voltage (AC) | | | V | 85...140 |
| Operations | | | | |
| Electrical life | | | hours | 100000 |
| Mechanical features | | | | |
| Tightening torque for terminals max | | | Nm | 1 |
| Conductor section | | | | |
| AWG/kcmil conductor section | | | max | 12 |
| IEC | | | max | mm ² 1 or 2 2.5 |
| Mounting adapter | | | | |
| Weight | | | g | 16 |
| Ambient conditions | | | | |
| Temperature | | | | |
| Operating temperature | | | min | °C -25 |
| | | | max | °C +60 |
| Storage temperature | | | min | °C -40 |
| | | | max | °C +85 |
| Dimensions | | | | |

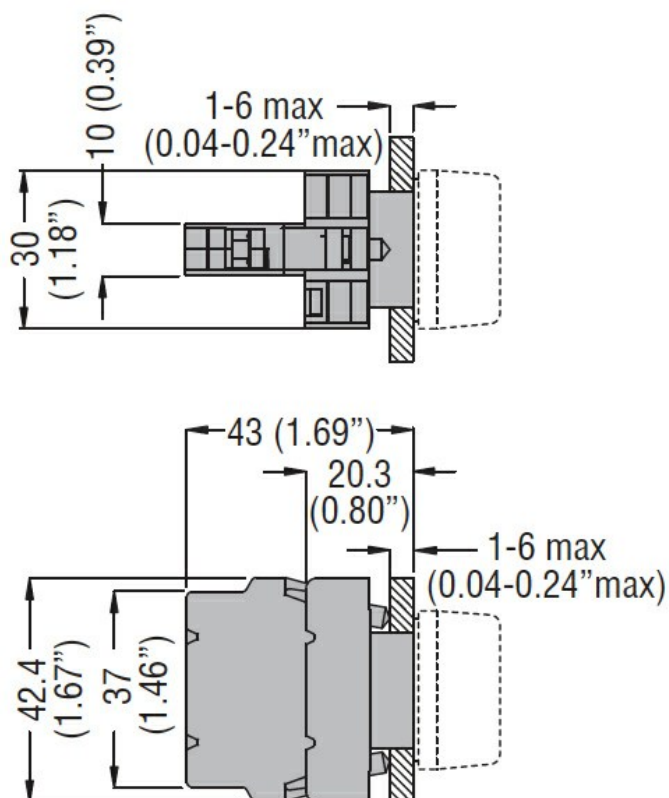

Wiring diagrams

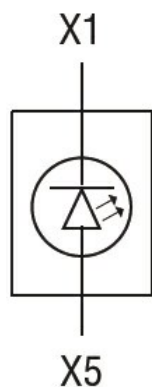

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices