




Color :  Light Almond

UPC Code : 078477381465

Country Of Origin : China

NEMA :  5-20R

Available Colors :

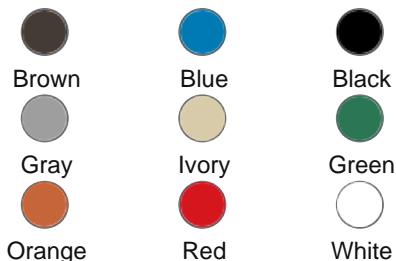

M58AA-T

Tamper-Resistant USB Receptacle, Type A/A, 20 Amp 125 Volt, Commercial Grade, Light Almond - Lev-Lok

Lev-Lok Combination Tamper-Resistant Duplex Decora Receptacle and Dual-Port USB Type A-A Charger, NEMA 5-20R, 20A-125V, 2 Pole, 3-Wire Grounding Receptacle – Light Almond

Lev-Lok employs a simple twist and lock wiring module to provide a safe and secure connection. These devices are pre-wired for 3x faster installations and 5x faster swap outs than traditional wiring. The speed and ease of Lev-Lok allows for optimal time, labor, and cost savings.

The M58AA:

- Two Type A USB ports with a combined total of 3.6A of charging power
- Type A USBs are the most recognized and commonly used USB port, used in most desktops, laptops, tablets, etc.
- Common applications: health care facilities, lobbies & waiting rooms, airports, hospitality, and educational institutions
- **For use with MSTWL Lev-Lok wiring modules only, modules sold separately**

Technical Information

Electrical Specifications

Amperage : 20 A

Current Interrupting : Certified for full-rated current and voltage

Dielectric Voltage : 2000 VAC

Grounding : Self-Grounding

Horsepower Rating : 1 hp

Pole : 2

Temperature Rise : Max 30°C

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature :
Maximum Continuous 40°C,
Minimum -10°C (w/o impact)

Material Specifications

Body Material : PBT

Face Material : Thermoplastic

Ground Clips : Brass

Ground Contacts : Brass

Locking Pins : Solid Brass

Mechanical Specifications

Product ID : Ratings are marked on device

Strap Construction : Through-Strap

Termination : Modular

Mounting Screws : #6 Plated
Steel

Mounting Strap : Galvanized
Steel

Shutter Material :
Thermoplastic

Shutter Mechanism : Acetal

Product Features

Brand : Lev-Lok

Color : Light Almond

Device Type : Combination
Device

Feature : USB Type A|Tamper-
Resistant

Grade : Commercial
Specification Grade

NEMA : 5-20R

Standards & Certifications

Applicable Standards : UL
498, CSA C22.2, No. 42, UL
1310, UL 94, NOM, FCC Class
B

NEMA : WD-1 and WD-6

USB Specifications

Single Port Charging Power :
12W

Total Charging Power : 18W

USB Cable Compatible : Type
A

USB Charger : 3.6A

Warranty

Warranty : 2-Year Limited

Patents*

| | |
|-----------|-----------|
| US7355117 | US9368982 |
| US7357652 | CA2857863 |
| CA2655707 | US7666010 |
| CA2621644 | US7820909 |
| CA2624409 | US9496726 |
| US8242362 | US7868719 |
| US8096818 | CA2677283 |
| CA2667092 | MX338817 |

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2025 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2025 Leviton Manufacturing Co., Inc.