


Recessed LED Slim Panels



Product Code	Input Voltage	Power	Lumen	CRI	Beam Angle	Color Temp	Body color	Size
CL-DS-36-3CCT-WH	110-130 VAC	6W	650lm	>85	120°	3CCT Adjustable 3000K-4000K-5000K	White	3inch
CL-DS-49-3CCT-WH	110-130 VAC	9W	950lm	>85	120°	3CCT Adjustable 3000K-4000K-5000K	White	4inch
CL-DS-36-5CCT-WH	90-130 VAC	6W	550lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	White	3inch
CL-DS-49-5CCT-WH	90-130 VAC	9W	800lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	White	4inch
CL-DS-36-5CCT-BL	90-130 VAC	6W	550lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	Black	3inch
CL-DS-49-5CCT-BL	90-130 VAC	9W	800lm	>85	120°	5CCT Adjustable 2700K-3000K-3500K-4000K-5000K	Black	4inch

- Low-profile durable aluminum body
- Isolated driver, prevents electric shock
- PF > 0.90
- Available in damp and wet location
- IC rated, safe to be in direct contact with insulation
- cETL approved
- No flicker
- Airtight
- FT4 wire
- Triac dimmable subject to proper dimmer
- Life time >50,000 hrs
- 5years warranty

3" Recessed LED Slim Panel

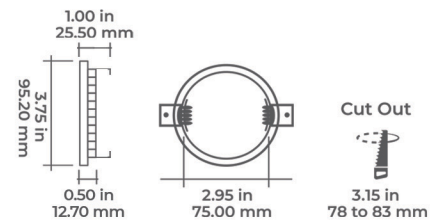

4" Recessed LED Slim Panel

