

## Switches, Low Voltage

5A, 24VDC

## Style Line<sup>®</sup> Specification Grade

# HUBBELL

### Features

- Maintained Contact
- Thread cleaning captive mounting screw
- Automatic self-grounding stainless steel staple


### Ordering Information

| Description                 | Device Color | UPC Number   | Catalog Number |
|-----------------------------|--------------|--------------|----------------|
| Rocker, back and side wired | Black        | 783585565354 | DS320BKLV      |



### Specifications

|                 |                    |
|-----------------|--------------------|
| Front           | Thermoplastic      |
| Base            | Thermoplastic      |
| Contacts        | Silver Alloy       |
| Terminal Screws | Brass              |
| Mounting Bridge | Steel, Zinc Plated |

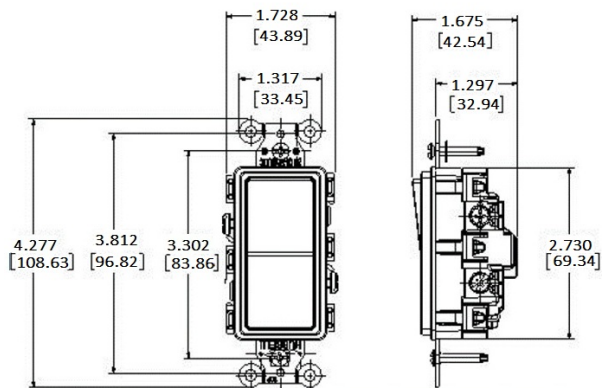

### Performance

#### Electrical

|                   |                       |
|-------------------|-----------------------|
| Configuration     | 3-Way                 |
| Operating Current | Maximum of 5A @ 24VDC |

#### Mechanical

|                        |  |
|------------------------|--|
| Terminal Accomodations | #14 AWG min. - #10 AWG max. solid or stranded copper wire only |
|------------------------|--|

#### Environmental

|                       |  |
|-----------------------|--|
| Operating Temperature | Max. continuous: 75°C; Min. continuous: -40°C without impact |
|-----------------------|--|

### Complementary Products

|   |        |
|---|--------|
| Wallplate, Decorator Opening                  | NP26BK |
| Wallplate, Decorator Opening, Stainless Steel | SS26   |

### Online Resources

eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

