


### 4FT Linkable Wrap Light



#### Specification

Model No.	Power	Input Voltage	Brightness	CCT	L x W x H
DSP-048T336WN-12	48W	120-277V	5500LM	4000K	47.2" x 5.3" x 2.1"
DSP-048T336WD-12				5000K	

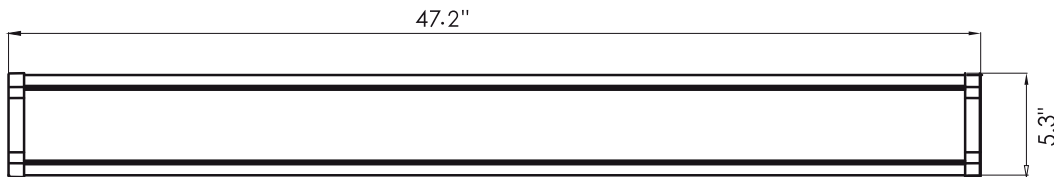

#### General Characteristics

<b>Fixture Life Hours</b>	50000 Hours
<b>Bulb</b>	Integrated LED
<b>Lumens Per Watt (LPW)</b>	110.00
<b>Safety Rating</b>	ETL - Damp Location
<b>Fixture Characteristics</b>	
<b>Shape</b>	Linear
<b>Mounting</b>	Surface / Suspend
<b>Use Location</b>	Indoor
<b>Electrical Characteristics</b>	
<b>Watts</b>	48 W
<b>Volts</b>	120-277V
<b>Power Factor</b>	0.95
<b>Operating Temperature</b>	-20°C to 45°C (-4°F to 113°F)
<b>Light Characteristics</b>	
<b>Brightness</b>	5500Lumens
<b>Color Accuracy (CRI)</b>	80
<b>Color Temperature</b>	4000K / 5000K
<b>Beam Angle</b>	110°
<b>Product Dimensions</b>	
<b>Item Dimensions (in)</b>	(L) 47.2 (W) 5.3 (H) 2.1
<b>Options:</b> ( Sell Separately )	Double Head Male Connector Linking Cable Power Cord Chain Kit

#### Options: ( Sell Separately )




Connector



Linking Cable



Power Cord



Chain Kit



### Surface Mounting

**1**

Tab l'attache

Lens Lentilles

Remove Enlevez

**2**

Outlet Box Boîte de sortie

AC 120-277V 50/60Hz 0.56A

Black Wire Fil noir

White Wire Fil blanc

Ground Wire Fil de mise à la terre

Purple Wire 0-10V Dim

Grey Wire 0-10V Dim

Wire Nut Serre-fil

**3**

Anchor Ancre

Screw Vis

Anchor Ancre

Screw Vis

Lens Lentilles

Slide Glisser

Screw Vis

**4**

Tab l'attache

Lens Lentilles

**5** Linking Options/ Options de connexion

Linking Cable Câble de connexion

Connector Connecteur

F

M