



FireFighter® Model D400

A code complying opening protective.



Introducing a one-of-a-kind rolling curtain shutter that has been tested and labeled to UL 10B for 90 minutes with hose stream and UL 1784 smoke & draft.

Unparalleled in the industry, the D400 rolling curtain shutter is designed to protect openings in *any* wall rated up to 2 hours – including Fire Walls and Fire Barrier Walls!


Tested and labeled.

The D400 was tested and labeled to UL 10B with hose stream and complies as an opening protective in accordance with all model building codes.*



How it works.

A simple but unique configuration of textile layers permanently joined together as one unit and stored on a barrel in the head box. When deployed, it rolls down as if it were a rolling steel door! A substantial opening protective ready to withstand heat, fire, smoke and the ultimate integrity test – the hose stream.

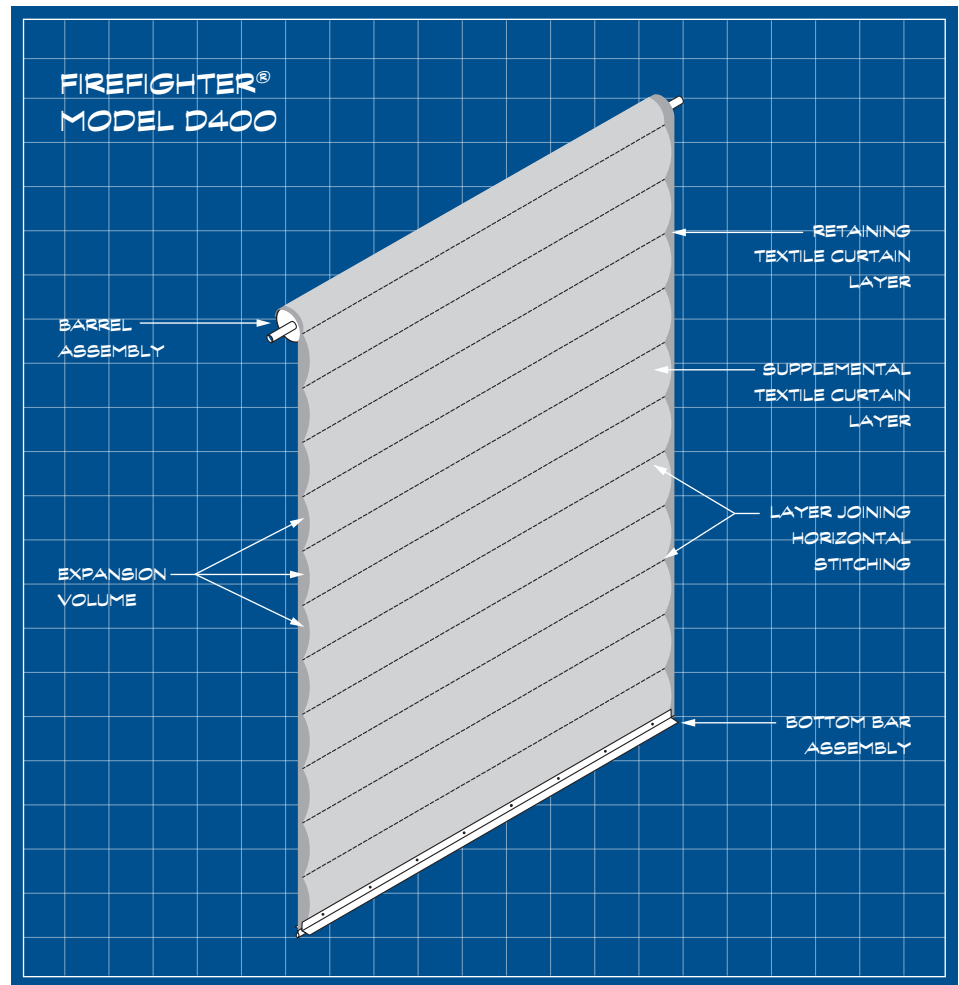

Large-size approvals.

Oversize labeling is approved for 3200 square feet in area – 80 feet in width and 40 feet in height. To ensure proper function and operation, consult the factory for large door applications.



What about the head box?

Although there is a negligible increase in the size of the D400 head box, it is comparable to the D200 in size and weight.

Advantages over a rolling steel assembly.

- Low profile components
- Light weight
- Simplified, easy installation

**Note: This curtain shutter is an opening protective in accordance with the requirements of Section 716.2 of the IBC and is NOT restricted to the language in Section 716.4 of the 2021 IBC wherein Fire Protective Curtains are tested without hose stream in accordance with UL10D and are limited to 20 minutes or less.*

This product has patents pending.

