


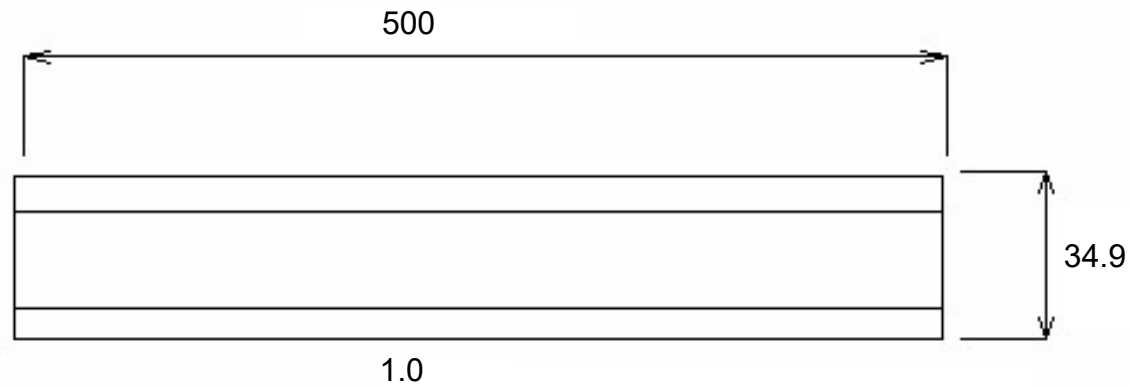

SPECIFICATION

MATERIAL	631□	853
CONDITION	AS DRAWN	Harden & Temper
UTS	800/900 MPa	1250/1450 MPa
ELONG.	10% Min.	10% min

TOLERANCES

Outside dia	+/-0.05mm
Thickness	+/- 1%

STR 1.5mm TIR
POLISH

ISSUE
MOD.

Issue 1

ALL DIMENSIONS IN
MILLIMETRES.
NOT TO SCALE
REMOVE ALL BURRS
AND SHARP EDGES.

DRG No:- CX2510

REYNOLDS