


HIGHLIGHTS

Specifications	
AC Output (W)(x1)	5000(Split Phase 240V)
AC Output (W)(x4)	2500(Single Phase 120V)
USB-A (QC) Output (x2)	5V/3A, 9V/2A, 12V/1.5A
USB-TypeC Output (x2)	5V/3A, 9V/2A, 12V/3A, 20V/5A
Car Port Output (x1)	12V/10A
XT60 Output (x1)	12V/30A, 24V/25A, 36V/20A
Max. AC Input Current (A)	16
Max. PV Charging Input (W)	1000
Battery Capacity (Wh)	5120
Battery Type	LiFePO ₄
Life Cycles	4000+
Dimensions (W*H*D) (mm)	450*538*352(Inverter:450*143*352; Battery:450*152*352)
Weight (Kg)	65.2(Inverter:10.7; Battery:26.7)
Communication Interface	WiFi/Bluetooth (Optional)

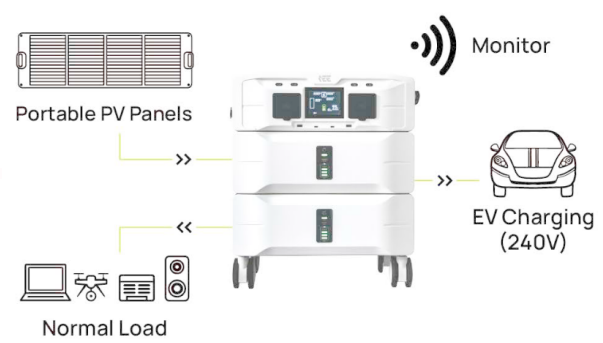

Dual Voltage Output

120V & 240V Versatile Power for Whole-home Appliances

Pure Sine Wave Output

THDv < 1.5%

Faster Charging Time

0-100% In 1.5 hours
(5.12kWh)
2.56kWh/module

Modular Design and Expandability

Max. 10.24kWh