



# SilvioMondinoStudio

Grandine 5 Lights  
Installation Guide - Rev. 02/21


## COMPONENTS

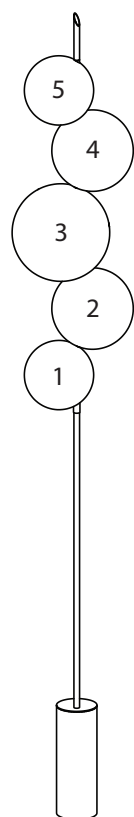


GRANDINE 5 LIGHTS




GLASS X 1



GLASS X 2



GLASS X 2



BASE X 1



ROD X 1



LED MODULE X 1

## SAFETY INFORMATION

**IMPORTANT:** DO NOT LIFT OR MOVE THE LAMP HOLDING IT FROM THE STEM.  
THE LAMP MUST BE PLACED ON A STABLE SURFACE TO AVOID ANY DAMAGE OR FALLS.  
UNDER NO CIRCUMSTANCES CAN GRANDINE FIXTURE BE MOUNTED ON NORMALLY FLAMMABLE SURFACES.  
SUITABLE FOR DRY, INDOOR USE ONLY.  
MAXIMUM AMBIENT TEMPERATURE: 30°C


LAMP STRUCTURE ASSEMBLY

<p>1 - CONNECT THE 24VCC WIRES. INSERT THE CONNECTOR FULLY UNTIL YOU HEAR A "CLICK"</p> <p>2 - SCREW THE LED MODULE (A) INTO THE ROD (B).</p>	<p>3 - CONNECT THE 24VCC WIRES. INSERT THE CONNECTOR FULLY UNTIL YOU HEAR A "CLICK"</p> <p>4 - SCREW THE ROD INTO THE BASE, PUSHING THE FIXTURE WIRES INSIDE THE BASE.</p>	<p>5 - CAREFULLY PLACE THE GLASS GLOBES FROM THE TOP IN THE GIVEN ORDER.</p>


NOTE

PLEASE CONTACT A LICENSED ELECTRICIAN.  
 USE NITRILE GLOVES TO HANDLE THE COMPONENTS TO AVOID FINGERPRINTS.  
 ALL BRUSHED BRASS SURFACES ARE SEALED TO SLOW DOWN THE PATINA DURING THE TIME.  
 POLISHED BRASS SURFACES ARE "LIVE" AND CAN BE RE-POLISHED USING A POLISHING CREAM.  
 UNEVEN SURFACES ON OXIDIZED FINISHING ARE A CHARACTERISTIC OF UNICITY, REVEALING THE CRAFTSMANSHIP PROCESS.

GENERAL WARNING

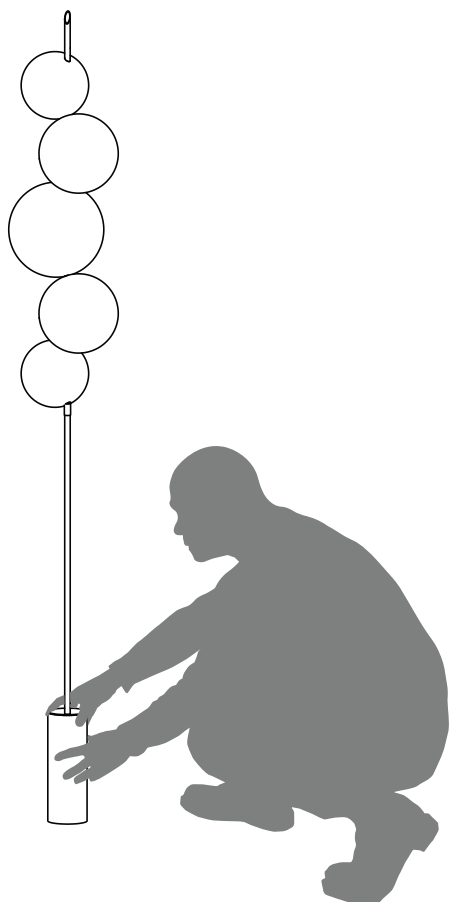

TO MOVE THE LAMP HOLD IT BY THE BASE AND BY THE ROD NEAR THE BASE

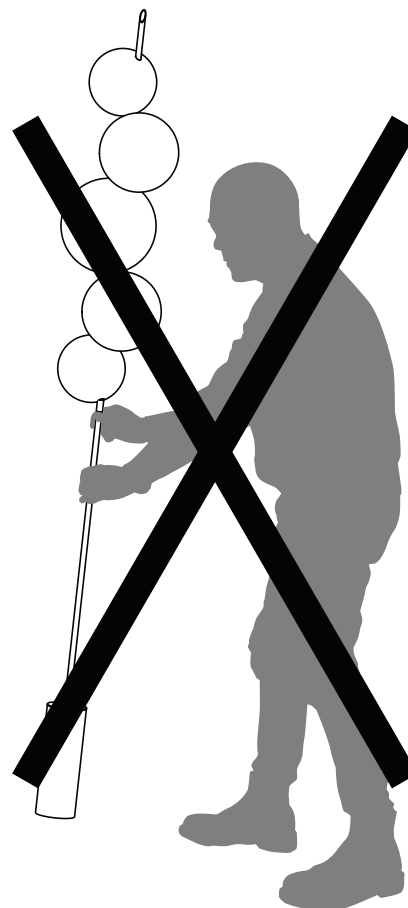

NEVER CARRY THE LAMP BY HOLDING IT BY THE UPPER ROD.

NOTE

USE NITRILE GLOVES TO HANDLE THE COMPONENTS TO AVOID FINGERPRINTS.  
PLEASE TAKE CARE WHEN CLEANING AND AVOID THE USE OF ABRASIVE SUBSTANCES AND MATERIALS.  
SIMPLY DUST METAL, STONE AND GLASS USING A DRY, LINT-FREE CLOTH AS REQUIRED.