



4XEM's 100W Wall Charger Dual USB-C

4XEM Part- 4XGAN010100WW



4XEM's 100W USB-C offers amazing charging power and speed with two USB ports capable of charging a variety of devices simultaneously. USB-A has long been a standard port allowing for charging or power to legacy and current devices; however, USB-C is rapidly becoming a new standard for charging devices, allowing for up to 100W charging for power at faster speeds. This device features 2x USB-C ports. Keep your USB devices charged on the go or at home reliably with 4XEM's USB-C Wall Charger.

Problem it solves: Charge one to two USB devices with reliable power and speed using 4XEM's 100W GaN Charger.

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep 1-866-999-4936 Ext.104 tschaus@4xem.com






DATA SHEET

Features:

- 100-Watt power budget
- 2x USB-C port
- Wall mounted charger
- Compatible with any USB charged device
- Compact travel size
- Rounded edges
- Fast Charging

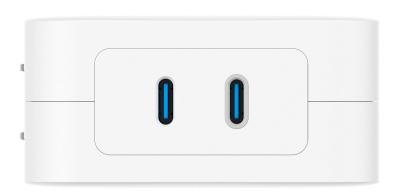

Applications:

- Home
- Office
- Travel
- Meetings
- Classrooms
- Quick Charging





4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep 1-866-999-4936 Ext.104 tschaus@4xem.com





DATA SHEET

Warranty Information Warranty 1 Year

Connector(s) Charging Port(s) 2x USB Type-C Female

Power Source Non-Polarized NEMA 1-15P (Standard NA Wall Outlet)

Fixed with Retractable Prongs

Performance Industry Standards USB-PD 3.0

Certifications CE FCC

Physical Characteristics Colour White

Display Yes

LED Inidicator(s) Power: Blue

Power Cable Length N/A

Product Height 2.62 in [66.5 mm]
Product Width 1.27 in [32.3 mm]
Product Length 2.69 in [68.3 mm]

3.32 in [84.4 mm] (with power prongs out)

Weight of Product 7.76 oz [220 g]

Power Total Power Budget 100W

Power Delivery 100W Max

Input Voltage 100-240VAC, 50Hz-60Hz @ 2A Output Voltage (C1/C2) 100W: 5/9/12/15V 3A, 20V 5A

Output Voltage (C1) + (C2) 95W MAX - 65W: 5/9/12/15V 3A, 20V 3.25A + 30W:

5/9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A

Environmental Operating Temperature 32°F to 104°F [0°C to 40°C]

Storage Temperature -4°F to 176°F [-20°C to 80°C]

Humidity 5% to 90% (non-condensing)

Packaging Information Package Type Poly-Bag

Package Height 6.00 in [152.4 mm]
Package Width 4.00 in [101.6 mm]
Package Length 1.28 in [32.5 mm]
Shipping (Package) Weight 7.83 oz [222 g]

What's in the Box Included in Package 1x 100W Dual USB-C GaN Charger

Notes Notes

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep 1-866-999-4936 Ext.104 tschaus@4xem.com



^{*} Product appearance and specifications are subject to change without notice. * Same day shipping is only available for orders shipping within the United States