

4XEM's 30W Wall Charger Triple Output w/ display

4XEM Part- 4XGAN01130WB



Introducing the 4XEM 30W Wall Charger with Triple Output and Display – your ultimate power solution for all your charging needs. Powered by cutting-edge GaN (gallium nitride) technology, this compact wall adapter delivers a whopping 30W of power, ensuring lightning-fast and efficient charging every time. Equipped with two USB-A ports and one USB-C port, this versatile charger allows you to charge multiple devices simultaneously, including the new iPhone 15, and 15 Plus as well as the advanced iPhone 15 Pro and Pro Max. Say goodbye to the hassle of carrying multiple chargers or waiting for your devices to charge one by one. With the 4XEM 30W Wall Charger, you can power up all your devices in one go, saving you precious time and energy.

4XEM Products Are Available At Your Favorite Online Retailers


WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com



Features:

- 30-Watt power budget
- 1x USB-C port
- 2x USB-A port
- Wall mounted charger
- Compatible with any USB charged device
- Compact travel size
- Rounded edges
- Fast Charging

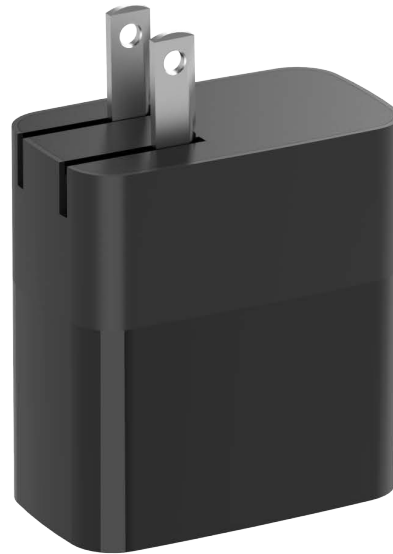

Applications:

- Home
- Office
- Travel
- Meetings
- Classrooms
- Quick Charging

4XEM Products Are Available At Your Favorite Online Retailers





DATA SHEET

Warranty Information	Warranty	1 Year
Connector(s)	Charging Port(s)	1x USB Type-C Female
	Power Source	2x USB Type-A Female
		Non-Polarized NEMA 1-15P (Standard NA Wall Outlet)
		Fixed with Retractable Prongs
Performance	Industry Standards Certifications	USB-PD 3.0 PPS
		CE
		ROHS
		REACH
Physical Characteristics	Colour	Black
	Display	Yes
	LED Indicator(s)	None
	Power Cable Length	N/A
	Product Height	2.06 in [52.2 mm]
	Product Width	1.16 in [29.5 mm]
	Product Length	2.22 in [56.5 mm]
	Weight of Product	2.85 in [72.5 mm] (with power prongs out)
		2.75 oz [78 g]
Power	Total Power Budget	30W
	Power Delivery	30W Max
	Input Voltage	100-240VAC, 50Hz-60Hz @ 0.85A
	Output Voltage (C1)	30W: 5/9V 3A, 12V 2.5A, 15V 2A, 20V 1.5A
	Output Voltage (A1/A2)	29.7W PPS: 3.3V-11V 2.7A
	Output Voltage (C1)+(A1/A2)/(A1)+(A2)/(C1)+(A1)+(A2)	18W: 5V 3A, 9V 2A, 12V 1.5A
		15W: 5V 3A (Shared)
Environmental	Operating Temperature	32°F to 104°F [0°C to 40°C]
	Storage Temperature	-4°F to 176°F [-20°C to 80°C]
	Humidity	5% to 90% (non-condensing)
Packaging Information	Package Type	Poly-Bag
	Package Height	6.00 in [152.4 mm]
	Package Width	4.00 in [101.6 mm]
	Package Length	1.17 in [29.7 mm]
	Shipping (Package) Weight	2.82 oz [80 g]
What's in the Box	Included in Package	1x 30W USB-C + Dual USB-A GaN Charger

* Product appearance and specifications are subject to change without notice.
* Same day shipping is only available for orders shipping within the United States.

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep
1-866-999-4936 Ext.104 tschaus@4xem.com

