



4XEM USB 3.0 SATA Hard Drive Enclosure

4XEM Part- 4XST235



With a durable and easily portable design 4XEM's USB 3.0 SATA Hard Drive enclosure is a product that offers protection and mobility. Compatible with both SATA HDD and SDD this device can fit into a variety of situations. This device turns SATA 2.5 hard drives into a USB super speed external pocket instantly. Ideal for data back-ups, video editing, recovering data and troubleshooting. The enclosure is paired with a USB A to Micro B USB cable, allowing for compatibly with a variety of host devices. Keep your data safe and close by with this Hard Drive Enclosure.

Problem it solves: Recover your images and other important files from your dead devices without the fear of damage, with this mobile and sturdy enclosure.

4XEM Products Are Available At Your Favorite Online Retailers

WWW.4XEM.COM

Contact Todd Schaus 4XEM sales Rep 1-866-999-4936 Ext.104 tschaus@4xem.com





DATA SHEET


Features:

- Detachable Micro USB Type B to USB Type-A connector cable
- SATA III Operating Mode
- Compatible with 2.5" SATA Drive Types
- Easy swap/ plug and play, no drivers needed
- Backwards compatible with USB 2.0 and 1.1
- USB Bus powered; no power adapter needed
- Supports Maximum Theoretical Data transfer rate of 625 MB/s
- Supports standard 2.5" 7mm/9mm SATA SSD and HDD Slim
- Support for "hot swapping" USB devices

 Supports Windows XP or later, Mac OS X and Linux - No driver required

Application

- Home Office
- Office
- Mobile
- Storage expansion

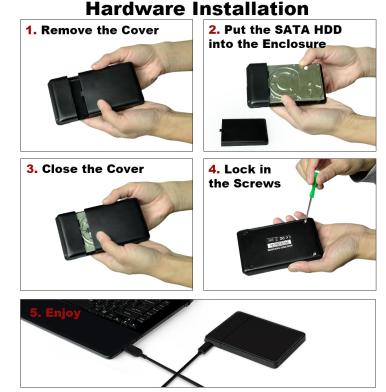

4XEM Products Are Available At Your Favorite Online Retailers

i.com



DATA SHEET

Warranty Information Warranty 1 Year

Features/Hardware Compatible Drive Types 2.5" SATA

> Number of Drives **Drive Installation** Fixed Fan(s) No Heatsink No

Chipset ID ASMedia - ASM1153E

Connector(s) & Performance Operating Mode USB 3.1 Gen 1

Host Data Line Speed 5 Gbps

Host Connectors Micro-USB SuperSpeed Type-B

Drive Connectors SATA Drive Operating Mode SATA III 625 MB/s* Maximum Data Transfer Rate*

Software OS Compatibility Windows XP or later (32-bit & 64-bit)

> Mac OSX Linux

Physical Characteristics Color Black

Shell Material **Plastic**

LED Indicators Power/Activity: Blue Detachable Cable Type Cable Length 16.06 in [408 mm] Max Drive Height 0.37 in [9.5 mm] Product Height 0.66 in [16.7 mm] Product Width 3.07 in [78.0 mm] 4.98 in [126.4 mm] Product Length

Weight of Product (Empty) 1.76 oz [50 g] Weight of Product (Occupied) 5.01 oz [142 g]*

Power Power Source **Bus Powered**

Power Consumption 4.5W

Operating Temperature 32°F to 104°F [0°C to 40°C] @ 10%-90% RH (Non-Condensing) Environmental

Storage Temperature 14°F to 158°F [-10°C to 70°C] @ 10%-90% RH (Non-Condensing)

Packaging Information Package Type

> Package Height 4.78 in [121.4 mm] Package Width 6.42 in [163.0 mm] Package Length 1.75 in [44.5 mm]

Shipping (Package) Weight 5.78 oz [164 g]

Special Notes / Requirements Notes "625 MB/s is the theoretical maximum bandwidth available. Data

throughput will be less due to overhead. Actual performance will also vary due to factors such as host processor, SSD/HDD used, drive buffer/controller, and other devices sharing the same bus, etc. Real world performance is typically 450 MB/s sequential read and 450 MB/ s sequential write using an SSD; 85 MB/s sequential read 85 MB/s

sequential write for a 5400RPM HDD.

Occupied weight measured with Seagate Momentus Thin 500GB

What's in the Box Included in Package 1x USB 3.0 2.5" SATA Enclosure

1x USB Type-A to 3.0 Micro-B Cable

1x User Manual 1x Screwdriver 2x KM3*5 Screws



^{*} Product appearance and specifications are subject to change without notice

^{*} Same day shipping is only available for orders shipping within the United States.