

4XEM USB 3.0 to DVI Display Adapter

4XEM Part- 4XUSB3DVI



Introducing the 4XEM USB 3.0 to DVI Display Adapter – Your Gateway to Enhanced Connectivity and Visual Brilliance!

Designed to excel, this adapter boasts a USB 3.0 host bus type for lightning-fast data transfer. Its DVI interface, along with two 3.5mm TRS ports, ensures you have a versatile array of connectivity options at your fingertips. It adheres to industry standards like USB 3.0, DVI-I, and VGA, ensuring compatibility with a wide range of devices.

It features a USB 3.0 Type-A host connector, providing a blazing 5Gbps data transfer rate, and it's directly attached for your convenience. The DVI connector supports a bandwidth of 4.95Gbps, delivering a maximum digital resolution of 2048 x 1152 at 60Hz with 8-bit per channel color depth. Plus, it supports analog operation through a DVI to VGA adaptor.

Compatibility is key, and the 4XEM USB 3.0 to DVI Display Adapter shines here. It seamlessly works with Windows® Vista, 7, 8, 8.1, and 10, as well as Mac OSX (10.4 or later) and Linux operating systems.

Experience the future of connectivity and display quality. The 4XEM USB 3.0 to DVI Display Adapter demands only an available USB port and a minimum system configuration of an Intel Core 2 Duo CPU at 2.0GHz and 1GB of RAM.

Transform your digital world today with 4XEM!

**4XEM Products Are Available At Your Favorite Online Retailers**

**WWW.4XEM.COM**

**Contact Todd Schaus 4XEM sales Rep  
1-866-999-4936 Ext.104    tschaus@4xem.com**




## Features:

- USB 3.0 Type-A Host Connector
- 1x DVI Port (24+5 Female port)
- 1x 3.5mm TRS Line out port
- 1x 3.5mm TRS Line in port
- USB3.0 compatibility with USB2.0 compatibility
- Resolution up to 2048 x 1152 @ 60Hz
- Capable Primary / Extend / Mirror Video Mode
- Windows (Vista, 7, 8, 8.1, 10), Mac OSX (10.4 or later) and Linux OS compatibility



## Application

- Home
- Office
- Display

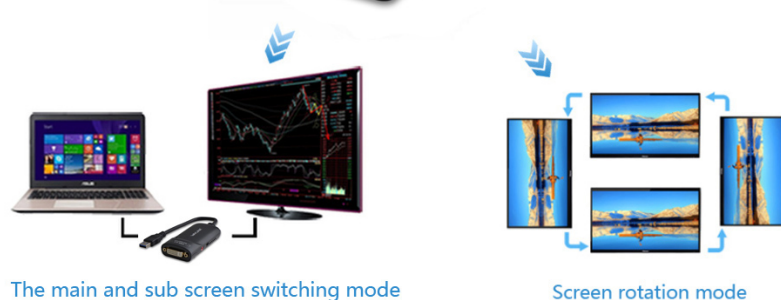

4XEM Products Are Available At Your Favorite Online Retailers





**DATA SHEET**

Warranty Information	Warranty	1 Year
Hardware	Host Bus Type Interface	USB 3.0 DVI 24+5 pin 2x 3.5mm TRS
	Industry Standards	USB 3.0 DVI-I VGA
Connector(s)	Flash	8MB
	SDRAM Chipset ID	512MB DDR2 DisplayLink - DL3500
Performance	Host Connector	USB 3.0 Type-A (5Gbps)
	Host Connector Type Connector Type(s)/Rate(s)	Direct Attached DVI 24+5 Female (SL Bandwidth 4.95Gbps) 3.5mm TRS Line In 3.5mm TRS Line Out
Software	Maximum Digital Resolution	2048 x 1152 @ 60Hz, 8bpc
	Analog Operation	Yes (via DVI to VGA adaptor)
Power	OS Compatibility	Windows® Vista, 7, 8, 8.1, 10 Mac OSX (10.4 or later) Linux
	Power Source Power Consumption	USB-Powered 1W
Physical Characteristics	Product Height	0.87 in [22.0 mm]
	Product Width	2.05 in [52.0 mm]
Environmental	Product Length	3.78 in [96.0 mm]
	Weight of Product	2.26 oz [64 g]
Packaging Information	Color	Black
	Material	ABS Plastic
What's in the Box	Cable Length	6.10 in [155.0 mm]
	LED Indicators	Power/Activity (Green)
Special Notes / Requirements	Operating Temperature	0°C to 40°C (32°F to 104°F)
	Storage Temperature	-10°C to 70°C (14°F to 158°F)
Special Notes / Requirements	Humidity	10% to 90% RH (non-condensing)
	Package Height	2.09 in [53.0 mm]
Special Notes / Requirements	Package Width	8.27 in [210.0 mm]
	Package Length	5.51 in [140.0 mm]
Special Notes / Requirements	Shipping (Package) Weight	9.45 oz [268 g]
	Included in Package	USB 3.0 DVI Adapter DVI-VGA Adapter DVI-HDMI Adapter Paper Driver CD Instruction Manual
Special Notes / Requirements	Minimum System Requirements	Available USB port CPU: Intel Core 2 Duo @ 2.0GHz RAM: 1GB

\* Product appearance and specifications are subject to change without notice.

\* Same day shipping is only available for orders shipping within the United States.

**4XEM Products Are Available At Your Favorite Online Retailers**

**WWW.4XEM.COM**

**Contact Todd Schaus 4XEM sales Rep  
1-866-999-4936 Ext.104    tschaus@4xem.com**

