

**DEWALT**

# JUST BREATHE

RESPIRATORY  
PROTECTION  
CATALOGUE



**GUARANTEED TOUGH.**

# DEWALT®



PERFECT FOR  
JOBS WITH HIGH  
**DUST**  
CONCENTRATION

## FFP2 & FFP3 DISPOSABLE PARTICULATE RESPIRATORS

Lightweight moulded FFP2 NR D and FFP3 NR D valved respirator for protection against fine dust and liquid aerosols.

### GLOSSARY

**FFP** = FILTERING FACEPIECES  
**NR** = NOT REUSABLE  
**D** = DOLOMITE TESTED  
**APF** = ASSIGNED PROTECTION FACTOR

### PACK SIZE OPTIONS

AVAILABLE IN PACKS  
OF 2pcs, 5pcs AND 10pcs



### FILTERING LEVELS

| FFP2         | FFP3         |
|--------------|--------------|
| 94%          | 99%          |
| @ 0.3 MICRON | @ 0.3 MICRON |

### PROTECTION FACTOR

|        |        |
|--------|--------|
| APF 10 | APF 20 |
|--------|--------|

### TYPICAL WORKPLACE APPLICATIONS

#### APPLICATIONS




CUTTING  
 DEMOLITION WORK  
 DRILLING  
 GRINDING  
 INSULATION WORK  
 PLASTERING  
 PAINTING  
 WELDING  
 WOODWORKING

#### MATERIALS

BRICK DUST  
(CAN CONTAIN SILICA)  
 CEMENT  
(CAN CONTAIN SILICA)  
 CONCRETE  
(CAN CONTAIN SILICA)  
 GLASS DUST  
 HARD WOOD  
(OAK, TROPICAL WOOD, TEAK, MDF)  
 MINERAL DUST  
(CAN CONTAIN SILICA/ASBESTOS)  
 PAINT  
(WITH CHROME, ARSENIC, COPPER)  
 SILICA  
 STAINLESS STEEL  
 FIBRE & FIBRE GLASS  
 METAL  
 PAINT (CHROME FREE)  
 PLASTIC  
 SOFT WOOD  
 SOLDERING  
 STEEL  
 VARNISH  
 WASTE SORTING



# FFP2 & FFP3 DISPOSABLE RESPIRATORS

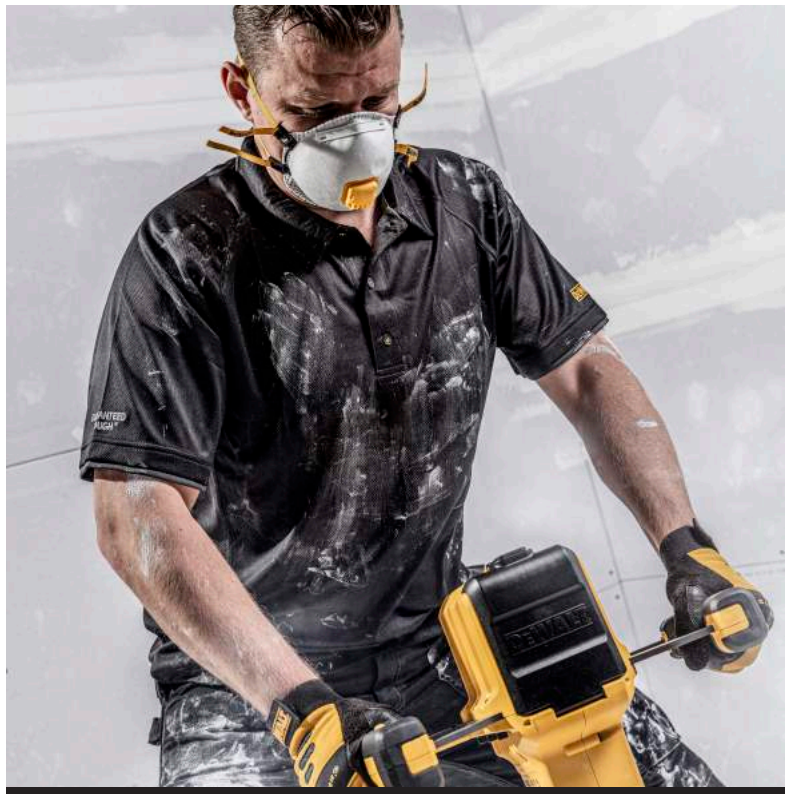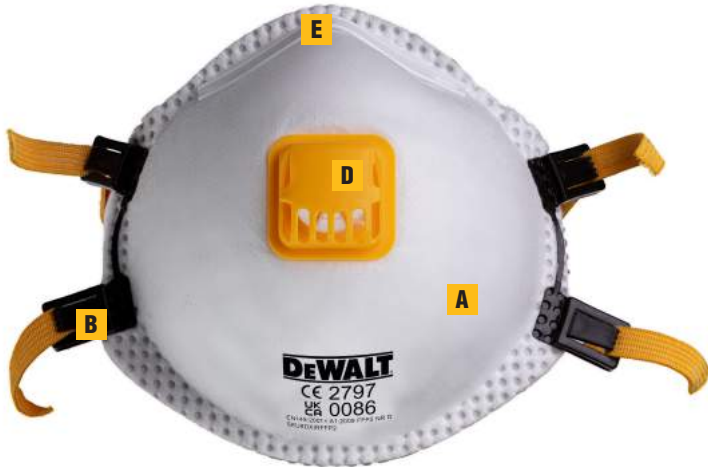

MINIMAL OBSTRUCTION TO FIELD OF VISION.



NOSE BRIDGE REMOVES THE NEED FOR REGULAR ADJUSTMENT.

## FEATURES


- A** Lightweight, cup shaped design provides a secure & comfortable fit for the user.
- B** 4 point adjustable head straps provide easy adjustment and better fit.
- C** Soft foam inner face seal improves user comfort.
- D** Front exhalation valve reduces breathing resistance for greater comfort.
- E** Preformed nose bridge removes the need for regular adjustment.

## PRODUCT SPECIFICATION


|                                      | DXIRFFP2 2/5/10                         | DXIRFFP3 2/5/10     |
|--------------------------------------|---|---------------------|
| <b>RESPIRATOR SIZE</b>               | Adjustable                              | Adjustable          |
| <b>FILTER TYPE</b>                   | P2 Particulate                          | P3 Particulate      |
| <b>FILTER EFFICIENCY</b>             | 94% @ 0.3 Micron                        | 99.99% @ 0.3 Micron |
| <b>APPROVALS &amp; CERTIFICATION</b> | EN 149:2001+A1 2009, CE 2797, UKCA 0086 |                     |



ADJUSTABLE STRAPS



COMFORTABLE INNER SEAL



EXHALATION VALVE

# DEWALT

# LIGHTWEIGHT DESIGN ULTRA LOW BREATHING RESISTANCE

## P3 & A2P3 LIGHTWEIGHT HALF MASKS

The DEWALT reusable half mask respirator with P3 or A2P3 filters provides protection in workplaces that have high levels of fine dust, lead, silica, MDF particles, or other forms of industrial pollutants in the air. The DEWALT half mask is comfortable to wear, has a low resistance airflow to make breathing easy, and is simple and easy to maintain.

Available in two sizes; medium and large.

### IN THE BOX

- 1x Half Mask Respirator
- 1x Pair of Filters



### FILTERING LEVELS

| P3           | A2P3         |
|--------------|--------------|
| 99.95%       | 99.95%       |
| @ 0.3 MICRON | @ 0.3 MICRON |

### PROTECTION FACTOR

|        |        |
|--------|--------|
| APF 20 | APF 10 |
|--------|--------|

### HALF MASK SELECTION GUIDE

| APPLICATIONS    | MATERIALS                | FILTER SELECTION |
|-----------------|--------------------------|------------------|
| CUTTING         | <b>DUST</b>              |                  |
| DEMOLITION WORK | SILICA                   | P3               |
| DRILLING        | CONCRETE CUTTING         | P3               |
| GRINDING        | STONE CUTTING            | P3               |
| INSULATION WORK | PLASTER                  | P3               |
| PLASTERING      | <b>ODOURS</b>            |                  |
| PAINTING        | RESINS                   | A2P3             |
| WELDING         | <b>FUMES</b>             |                  |
| WOODWORKING     | WELDING                  | P3               |
|                 | (FERROUS & LEAD)         |                  |
|                 | <b>WOODS</b>             |                  |
|                 | HARD WOOD                | P3               |
|                 | SOFT WOOD                | P3               |
|                 | <b>FIBRES</b>            |                  |
|                 | ASBESTOS                 | P3               |
|                 | FIBRE GLASS              | P3               |
|                 | <b>PAINTING</b>          |                  |
|                 | WATER BASED              | P3 / A2P3        |
|                 | BRUSH - SOLVENT BASED    | A2P3             |
|                 | SPRAY - SOLVENT BASED    | A2P3             |
|                 | MANUAL PREPARATION       | P3 / A2P3        |
|                 | POWERED PREPARATION      | P3 / A2P3        |
|                 | HEAT PAINT STRIPPING     | A2P3             |
|                 | <b>MAINTENANCE</b>       |                  |
|                 | WHITE SPIRIT             | A2P3             |
|                 | GLYPHOSATE (WEED KILLER) | A2P3             |



# LIGHTWEIGHT HALF MASK RESPIRATOR



MINIMAL OBSTRUCTION TO FIELD OF VISION.



ULTRA-LOW BREATHING RESISTANCE ALLOWS USER TO WEAR FOR LONGER.

## FEATURES


- A** Lightweight design and low burden airflow system provides ultra-low breathing resistance and improved user comfort for longer periods.
- B** Secure and easily adjustable elastomeric head cradle provides a secure fit and extra comfort.
- C** Dual mode harness enables users to doff their mask without removing head protection.
- D** Twin-filter design provides even distribution of weight with minimal obstruction to field of vision.

## PRODUCT SPECIFICATION

|                                      | DXIR1HMMP3   | DXIR1HMLP3 | DXIR1HMMA2P3     | DXIR1HMLA2P3 |
|--------------------------------------|--|------------|------------------|--------------|
| <b>RESPIRATOR SIZE</b>               | Medium   | Large      | Medium           | Large        |
| <b>FILTER TYPE</b>                   | P3 Particulate   |            | A2P3 Combination |              |
| <b>FILTER EFFICIENCY</b>             | 99.95% @ 0.3 Micron  |            |                  |              |
| <b>APPROVALS &amp; CERTIFICATION</b> | HALF MASK (EN140:1998); P3 FILTER (EN143:2000); A2P3 FILTER (EN14387:2004+A1:2008), CE 2797, UKCA 0086 |            |                  |              |



LOW BREATHING RESISTANCE



QUICK CHANGE FILTERS



LATEX FREE

# DEWALT

## PROTECTS IN THE MOST INTENSE ENVIRONMENTS



## P3 & A2P3 LIGHTWEIGHT FULL FACE MASKS

The DEWALT reusable full face mask respirator with P3 or A2P3 filters provides protection in workplaces that have high incidences of fine dust, lead, silica, MDF particles, or other forms of industrial pollutants in the air. The DEWALT full face mask is comfortable to wear, has a low resistance airflow to make breathing easy with an impact resistant visor that conforms to EN166 to protect from debris.

Available in two sizes; medium and large.

### IN THE BOX

- 1x Full Face Mask Respirator
- 1x Pair of Filters



### FILTERING LEVELS

| P3           | A2P3         |
|--------------|--------------|
| 99.95%       | 99.95%       |
| @ 0.3 MICRON | @ 0.3 MICRON |

### PROTECTION FACTOR

|        |        |
|--------|--------|
| APF 40 | APF 20 |
|--------|--------|

### FULL FACE MASK SELECTION GUIDE

| APPLICATIONS    | MATERIALS                | FILTER SELECTION |
|-----------------|--------------------------|------------------|
| CUTTING         | <b>DUST</b>              |                  |
| DEMOLITION WORK | SILICA                   | P3               |
| DRILLING        | CONCRETE CUTTING         | P3               |
| GRINDING        | STONE CUTTING            | P3               |
| INSULATION WORK | PLASTER                  | P3               |
| PLASTERING      | <b>ODOURS</b>            |                  |
| PAINTING        | RESINS                   | A2P3             |
| WELDING         | <b>FUMES</b>             |                  |
| WOODWORKING     | WELDING                  | P3               |
|                 | (FERROUS & LEAD)         |                  |
|                 | <b>WOODS</b>             |                  |
|                 | HARD WOOD                | P3               |
|                 | SOFT WOOD                | P3               |
|                 | <b>FIBRES</b>            |                  |
|                 | ASBESTOS                 | P3               |
|                 | FIBRE GLASS              | P3               |
|                 | <b>PAINTING</b>          |                  |
|                 | WATER BASED              | P3 / A2P3        |
|                 | BRUSH - SOLVENT BASED    | A2P3             |
|                 | SPRAY - SOLVENT BASED    | A2P3             |
|                 | MANUAL PREPARATION       | P3 / A2P3        |
|                 | POWERED PREPARATION      | P3 / A2P3        |
|                 | HEAT PAINT STRIPPING     | A2P3             |
|                 | <b>MAINTENANCE</b>       |                  |
|                 | WHITE SPIRIT             | A2P3             |
|                 | GLYPHOSATE (WEED KILLER) | A2P3             |



# LIGHTWEIGHT FULL FACE MASK RESPIRATOR



ADJUSTABLE HARNESS HELPS USERS STAY COMFORTABLE FOR LONGER.



ALL PARTS OF THE RESPIRATOR ARE FULLY REPLACABLE.

## FEATURES


- A** Lightweight design and low burden airflow system provides ultra-low breathing resistance and improved user comfort for longer periods.
- B** High impact resistant polycarbonate visor provides an unobstructed field of view and protects users from projectile debris.
- C** 5-point adjustable head harness helps users stay comfortable for longer.
- D** Twin-filter design provides even distribution of weight with minimal obstruction to field of vision.
- E** All parts of the respirator are fully replaceable making it easy to maintain.

## PRODUCT SPECIFICATION


|                                      | DXIR1FFMMP3   | DXIR1FFMLP3 | DXIR1FFMMA2P3    | DXIR1FFMLA2P3 |
|--------------------------------------|---|-------------|------------------|---------------|
| <b>RESPIRATOR SIZE</b>               | Medium  | Large       | Medium           | Large         |
| <b>FILTER TYPE</b>                   | P3 Particulate  |             | A2P3 Combination |               |
| <b>FILTER EFFICIENCY</b>             | 99.95% @ 0.3 Micron   |             |                  |               |
| <b>APPROVALS &amp; CERTIFICATION</b> | FULL FACE MASK (EN136:1998); P3 FILTER (EN143:2000); A2P3 FILTER (EN14387:2004+A1:2008), CE 2797, UKCA 0086 |             |                  |               |



LOW BREATHING RESISTANCE



QUICK CHANGE FILTERS



EYE PROTECTION





Specificaties, zoals mentioned in the catalogue are not binding, and can be changed without notice of the producer.



Kopersteden 24-6  
7547 TK Enschede

053 - 208 48 20  
info@toolmaster.nl

**TOOLMASTER.NL**