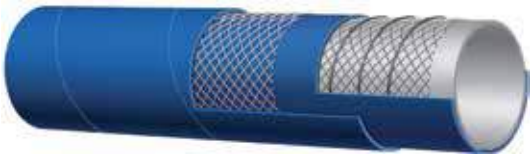


Design and dimensions shown may be changed without prior notice

// 902LE


**Hot air blower 10 bar (150 psi) - Hard wall****Tube:** white EPDM - heat resistant.**Reinforcement:** high tensile textile cords with embedded steel helix wire.**Cover:** blue EPDM - heat, abrasion and ozone resistant.**Application:** hot air connection from volumetric compressor to bulk food/material road tanker.

Special light weight and flexible construction.

Constant operation: -40 °C +180 °C (-40 °F +356 °F)

↔		↔		↻		↻		⤴		⌒		⚖	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft	
51,0	2"	63,00	2,48	10	150	30	450	153,0	6,02	100	1,560	1,05	
53,0	2 1/16"	65,00	2,56	10	150	30	450	159,0	6,26	100	1,610	1,09	
63,0	2 1/2"	77,00	3,03	10	150	30	450	189,0	7,44	90	2,380	1,60	
76,0	3"	90,00	3,54	10	150	30	450	228,0	8,98	90	2,840	1,91	
90,0	3 1/2"	104,00	4,09	10	150	30	450	270,0	10,63	90	3,520	2,37	

// 903LE

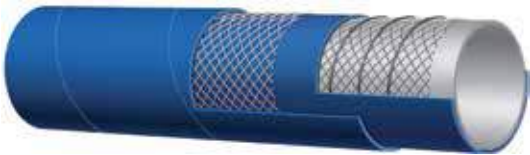**Hot air blower 10 bar (150 psi) - Hard wall
FDA****Tube:** white EPDM - heat resistant.**Reinforcement:** high tensile textile cords with embedded steel helix wire.**Cover:** blue EPDM - heat, abrasion and ozone resistant.**Application:** hot air connection from volumetric compressor to bulk food/material road tanker.

Special light weight and flexible construction.

Constant operation: -40 °C +180 °C (-40 °F +356 °F)

↔		↔		↻		↻		⤴		⌒		⚖	
mm	in	mm	in	bar	psi	bar	psi	mm	in	%	kg/m	lb/ft	
38,0	1 1/2"	50,00	1,97	10	150	30	450	114,0	4,49	100	1,140	0,77	
51,0	2"	63,00	2,48	10	150	30	450	153,0	6,02	100	1,470	0,99	
76,0	3"	90,00	3,54	10	150	30	450	228,0	8,98	90	2,670	1,80	
102,0	4"	116,00	4,57	10	150	30	450	306,0	12,05	90	3,630	2,44	
127,0	5"	145,00	5,71	10	150	30	450	445,0	17,52	80	6,060	4,08	