


T876


SFUCEM 10 4SN

Dorngefertigter Zementsiloschlauch geeignet zum Durchleiten von Zement, Kalk, Kies und pulverförmigen abrasiven Medien mit kleiner Teilchengröße. Geeignet auch für Tanklastwagen.


Mandrel built bulk material delivery hose suitable for abrasive materials such as cement, chalk, lime and abrasive powders with small granules. Suitable for silo discharging and on tank trucks.

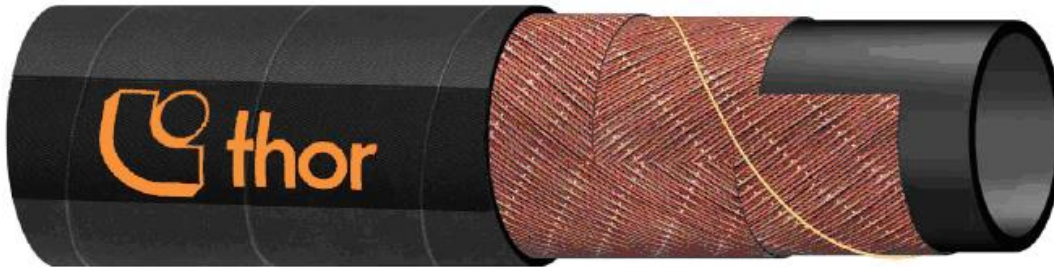

Technische Daten

Seele	Schwarzes, glattes Gummi, elektrisch leitfähig und abriebfest.
Einlagen	Synthetische Textileinlagen und Kupferlitze
Decke	Schwarzes, glattes gummi, abrieb- und witterungsbeständig. Stoffgemustert.
Betriebsdruck	10 bar
Soll-Platzdruck	30 bar
Temperatur	-40 °C +70 °C
Markierung	 thor DRY MATERIAL DELIVERY HOSE WP 10 BAR – 150 PSI (in orangener Schrift)

Technical Characteristics

Tube	<i>Black smooth conductive rubber, resistant to abrasion.</i>
Reinforcement Cover	<i>High tensile textile plies, antistatic wire</i> <i>Black, smooth, weather and abrasion resistant rubber. Fabric impression.</i>
Working Pressure	10 bar
Nominal Burst Pressure	30 bar
Temperature	-40 °C +70 °C
Marking	 thor DRY MATERIAL DELIVERY HOSE WP 10 BAR – 150 PSI (in orange letters)

Abmessungen / Sizes

Innendurchmesser Inner Diameter	Wanddicke Wall Thickness	Außendurchmesser Outside Diameter	Working Pressure	Gewicht Weight
mm	mm	mm	bar	Kg/m
76	8,5	93	10	3,40
102	10	122	10	4,30
127	11,5	150	10	5,70
152	11	174	10	8,10