


SENSOR



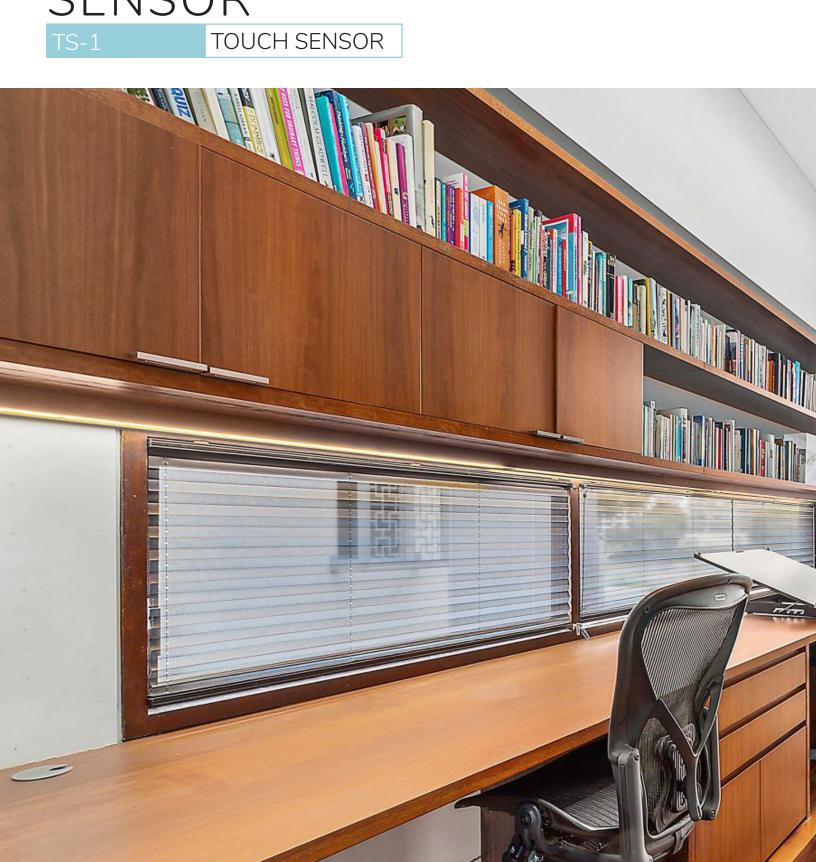

The touch sensor is designed for seamless integration into joinery and cabinetry. Featuring a soft blue LED ring for visibility, it offers simple on/ off control with a single tap—and smooth dimming with a push-and-hold function, giving you full 0-100% brightness control.


It's a convenient solution when you want to place the switch close to the task area, making it perfect for study desks, workbenches, home offices, or anywhere hands-on control is a must. Clean, practical, and easy to install.



TECHNICAL SPECIFICATIONS

PRODUCT CODE	TS-1		
EXTERNAL DIMENSIONS (mm)	D20*L22.5mm		
CUTOUT DIMENSIONS (mm)	17mm (drilling depth 18.5mm)		
INTERNAL DIMENSIONS (mm)	D17*L18.5mm		
SUPPLIED CABLE LENGTH (mm)	1000mm + quick connect		
OUTPUT TYPE	Constant Voltage		
INPUT POWER (V)	5V		
OUTPUT POWER (V)	5V		
SENSITIVTY	Touch		
SENSITIVTY ANGLE (°)	~		
COLOUR / FINISH OPTIONS	White		
SUPPLIED IN BOX	1 x TS-1 touch sensor 1 x SLG-DIM controller		
IP RATING	IP20		
IK RATING	~		
WARRANTY	36 months		
MATERIAL	Injection molded plastic		
MOUNTING	Recessed concealed		
NOTES	Touch sensor must be used with SLG-DIM controller for dimming functionalityv. Comes supplied as standard		

LINE DRAWING

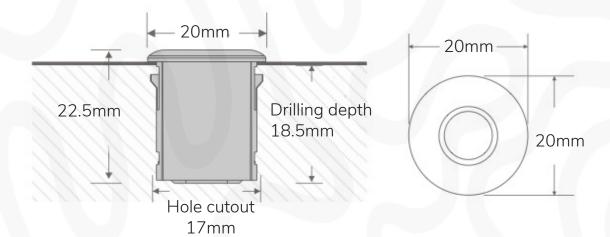

ORDERING INFORMATION

ITEM NAME	CODE	LENGTH	TYPE	COLOUR
TOUCH SENSOR	TS-1	D20*L22.5mm	Touch module	White

ACCESSORIES

ITEM NAME	CODE	SUPPLIED	TYPE
SOFT START DIMMING CONTROLLER	SLG-DIM	Sold individually	LED Controller