

SOFTENER

MODEL NO. 140-28-450-S-4M

CAPACITY:

MIN. 360,000 grs. @ 10 lbs./cu.ft.
 MAX. 450,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 45 gpm.
 PEAK 66 gpm.
 BACKWASH 25 gpm.

TANK SIZE: 30" x 72"


COMPOSITE

MEDIA:

RESIN 15 cu.ft.
 GRAVEL 350 lbs.

PIPE SIZE:

INLET 1-1/2"
 OUTLET 1-1/2"
 DRAIN 1"
 BRINE 1/2"
 METER 1-1/2"

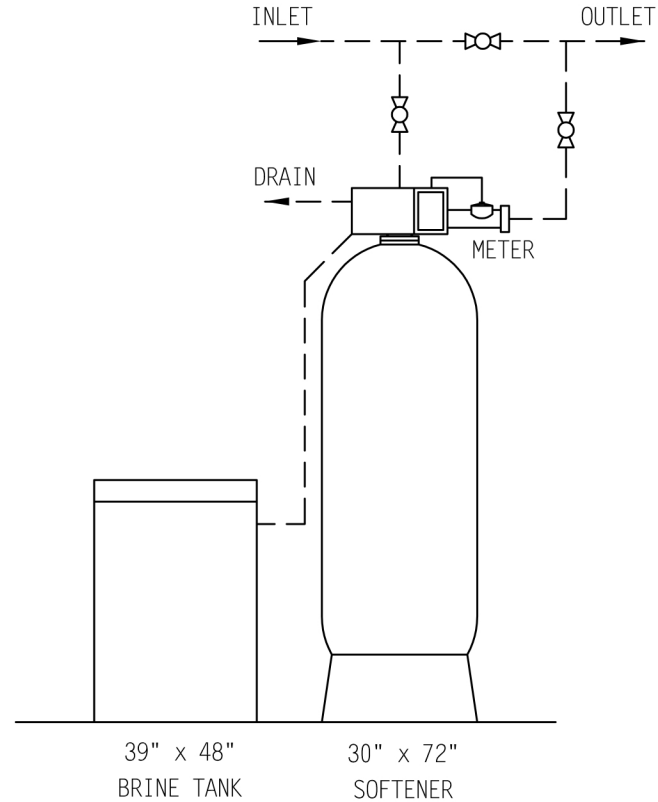

BRINE TANK

TANK SIZE: 39" x 48"

POLYETHYLENE

CAPACITY:

250 gals.
 2200 lbs./salt

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 1,523 lbs.
 TOTAL OPERATING 4,140 lbs.


NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY US WATER SYSTEMS

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 US WATER SYSTEMS

| | | | |
|---|-----------|---|--|
|  | | US WATER SYSTEMS 1209 COUNTRY CLUB RD INDIANAPOLIS, IN 46234 1-800-608-8792 | |
| | | GENERAL ARRANGEMENT DWG. SOFTENER 450K SYSTEM 4-METER | |
| DRAWN BY: | M. CURTIS | DWG. NO. 140-28-450-S-4M | |
| DATE: | _____ | | |
| CHECKED BY: | _____ | | |
| PAGE 1 OF 1 | | | |