

TRIPLEX PROGRESSIVE SOFTENER

MODEL NO. 140-29-300-TX-9

CAPACITY:

MIN. 200,000 grs. @ 10 lbs./cu.ft. (each tank)
 MAX. 300,000 grs. @ 15 lbs./cu.ft. (each tank)

FLOW RATE:

NORMAL 60 gpm. (each tank)
 PEAK 95 gpm. (each tank)
 BACKWASH 15 gpm. (each tank)

TANK SIZE: 24" x 72"


COMPOSITE

MEDIA:

RESIN 10 cu.ft. (each tank)
 GRAVEL 250 lbs. (each tank)

PIPE SIZE:

INLET 2"
 OUTLET 2"
 DRAIN 1"
 BRINE 1/2"
 METER 2"

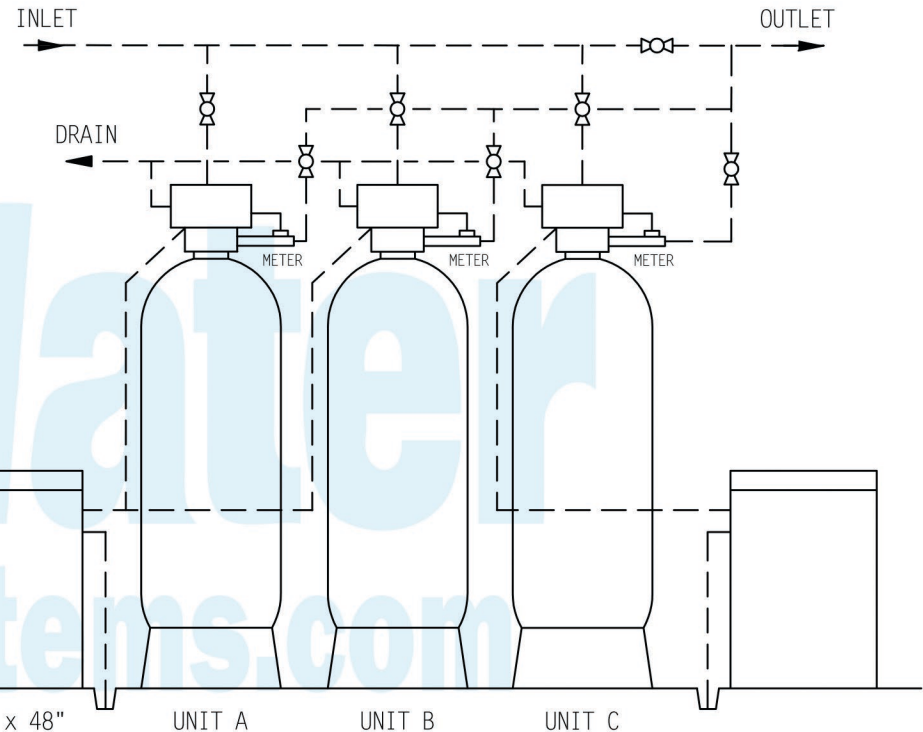

30" x 48"
BRINE TANK

UNIT A

UNIT B

UNIT C

24" x 72"
SOFTENER

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY US WATER SYSTEMS

BRINE TANK

TANK SIZE: 30" x 48"
 POLYETHYLENE

CAPACITY:

145 gals. (each tank)
 1,200 lbs./salt (each tank)

BRINE VALVE: 454HF

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 3,330 lbs.

SPACE REQUIRED (APPROX)

148"L x 30"W x 86"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 US WATER SYSTEMS



US WATER SYSTEMS

1209 COUNTRY CLUB RD
 INDIANAPOLIS, IN 46234
 1-800-608-8792

GENERAL ARRANGEMENT DWG.

SOFTENER 300K

SYSTEM 14 TRIPLEX PROGRESSIVE

DRAWN BY:	M. CURTIS
DATE:	
CHECKED BY:	
PAGE 1 OF 1	

DWG. NO.

140-29-300-TX-9