

TRIPLEX PROGRESSIVE SOFTENER

MODEL NO. 140-29-600-TX-9

CAPACITY:

MIN. 480,000 grs. @ 10 lbs./cu.ft. (each tank)
 MAX. 600,000 grs. @ 15 lbs./cu.ft. (each tank)

FLOW RATE:

NORMAL 100 gpm. (each tank)
 PEAK 140 gpm. (each tank)
 BACKWASH 35 gpm. (each tank)

TANK SIZE: 36" x 72"


COMPOSITE

MEDIA:

RESIN 20 cu.ft. (each tank)
 GRAVEL 500 lbs. (each tank)

PIPE SIZE:

INLET 2"
 OUTLET 2"
 DRAIN 1"
 BRINE 1/2"
 METER 2"

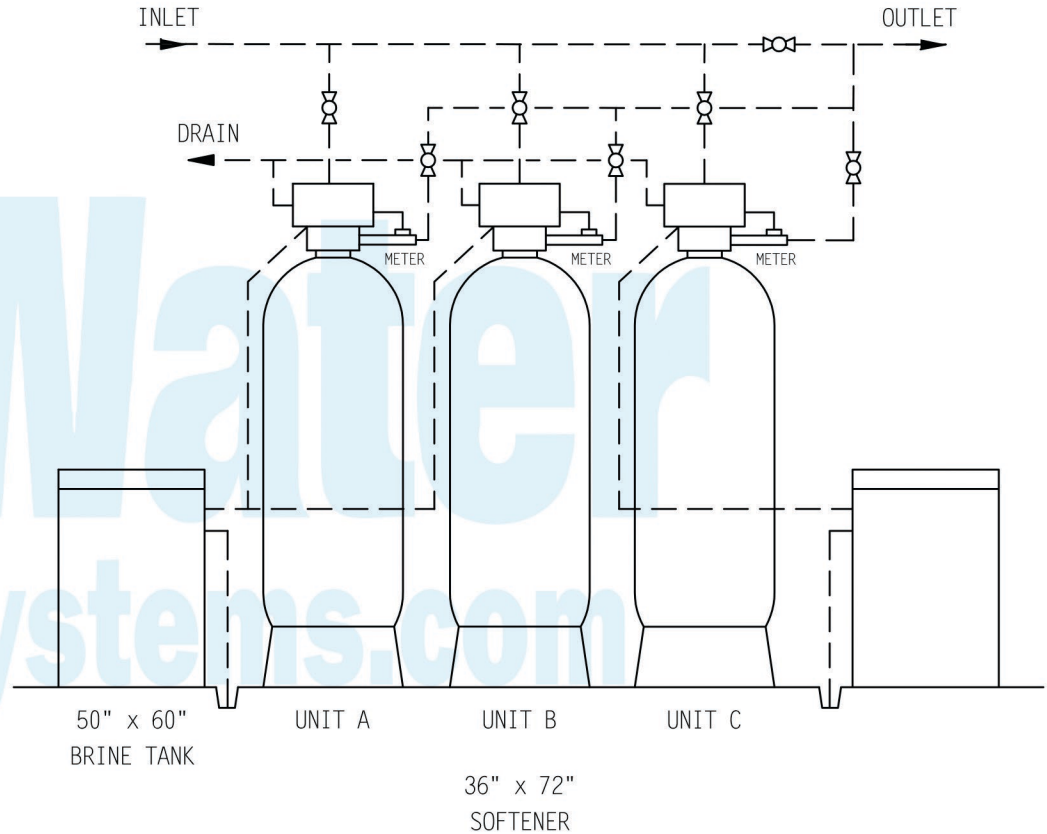

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY US WATER SYSTEMS

BRINE TANK

TANK SIZE: 50" x 60"
 POLYETHYLENE

CAPACITY:

500 gals. (each tank)
 4,500 lbs./salt (each tank)

BRINE VALVE: 454HF
 BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 6,215 lbs.

SPACE REQUIRED (APPROX)

224"L x 50"W x 95"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND
 CANNOT BE REPRODUCED OR USED TO
 MANUFACTURE ANYTHING SHOWN OR REFERRED
 TO WITHOUT DIRECT WRITTEN PERMISSION FROM
 US WATER SYSTEMS

	US WATER SYSTEMS 1209 COUNTRY CLUB RD INDIANAPOLIS, IN 46234 1-800-608-8792
	GENERAL ARRANGEMENT DWG. SOFTENER 600K SYSTEM 14 TRIPLEX PROGRESSIVE

GENERAL ARRANGEMENT DWG.
 SOFTENER 600K
 SYSTEM 14 TRIPLEX PROGRESSIVE

DRAWN BY:	M. CURTIS
DATE:	
CHECKED BY:	
PAGE 1 OF 1	

DWG. NO.
140-29-600-TX-9