

# TRIPLEX PROGRESSIVE SOFTENER

MODEL NO. 140-39-600-TX-9

**CAPACITY:**

MIN. 480,000 grs. @ 10 lbs./cu.ft. (each tank)

MAX. 600,000 grs. @ 15 lbs./cu.ft. (each tank)

**FLOW RATE:**

NORMAL 185 gpm. (each tank)

PEAK 250 gpm. (each tank)

BACKWASH 35 gpm. (each tank)

TANK SIZE: 36" x 72"

COMPOSITE

**MEDIA:**

RESIN 20 cu.ft. (each tank)

GRAVEL 500 lbs. (each tank)

**PIPE SIZE:**


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

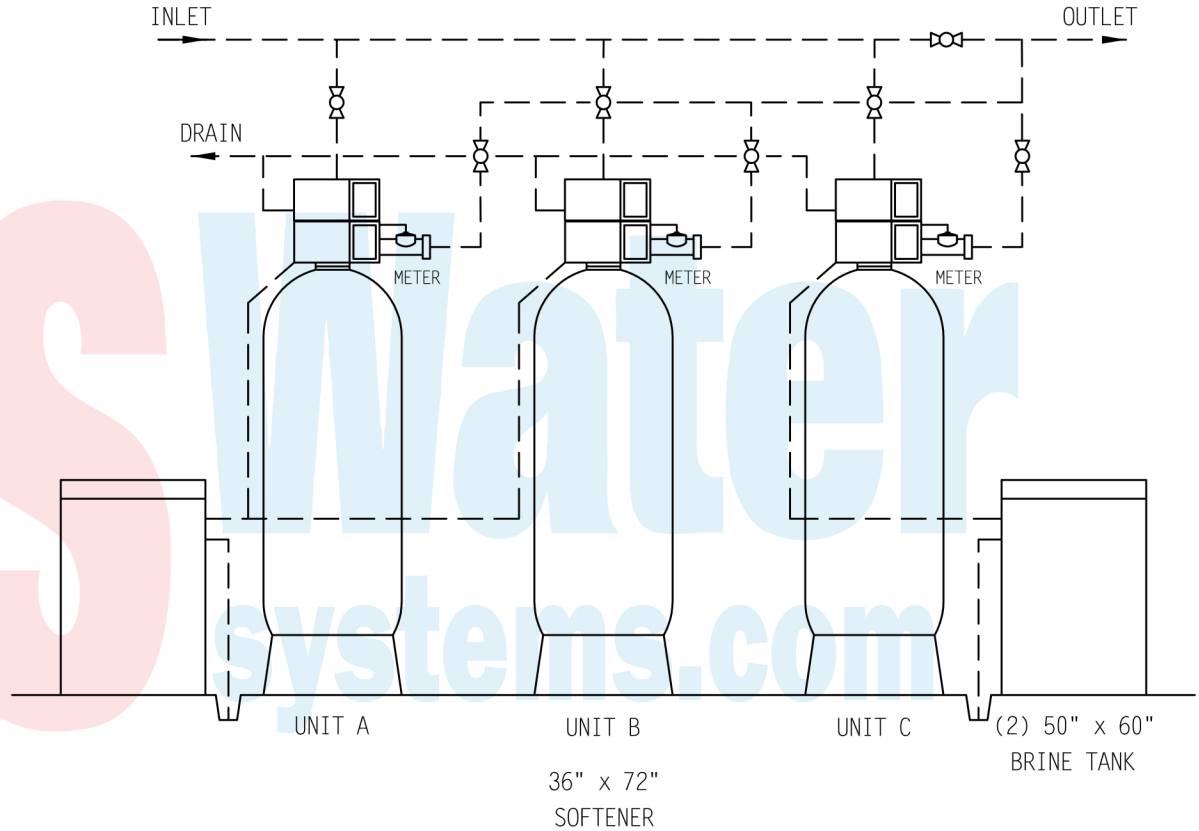

**NOTE:**

ALL DASHED PIPE, VALVES,  
AND FITTINGS NOT PROVIDED  
BY US WATER SYSTEMS

**BRINE TANK**

TANK SIZE: 50" x 60"

POLYETHYLENE

**CAPACITY:**

500 gals. (each tank)

4,500 lbs./salt (each tank)

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 5,950 lbs.


**SPACE REQUIRED (APPROX)**

232"L x 50"W x 96"H

PEAK FLOWS ARE NOT  
RECOMMENDED FOR EXTENDED  
PERIODS OF TIME.

**DO NOT SCALE DRAWING**

THIS DRAWING IS ISSUED IN CONFIDENCE AND  
CANNOT BE REPRODUCED OR USED TO  
MANUFACTURE ANYTHING SHOWN OR REFERRED  
TO WITHOUT DIRECT WRITTEN PERMISSION FROM  
US WATER SYSTEMS

		<b>US WATER SYSTEMS</b> 1209 COUNTRY CLUB RD INDIANAPOLIS, IN 46234 1-800-608-8792	
		GENERAL ARRANGEMENT DWG. SOFTENER 600K SYSTEM 14-PROGRESSIVE	
DRAWN BY:	M. CURTIS	DWG. NO.	
DATE:	_____	<b>140-39-600-TX-9</b>	
CHECKED BY:	_____		
PAGE 1 OF 1			