

TRIPLEX PROGRESSIVE SOFTENER

MODEL NO. 140-39-900-TX-9

CAPACITY:

MIN. 720,000 grs. @ 10 lbs./cu.ft. (each tank)

MAX. 900,000 grs. @ 15 lbs./cu.ft. (each tank)

FLOW RATE:

NORMAL 200 gpm. (each tank)

PEAK 270 gpm. (each tank)

BACKWASH 50 gpm. (each tank)

TANK SIZE: 42" x 72"

COMPOSITE

MEDIA:

RESIN 30 cu.ft. (each tank)

GRAVEL 700 lbs. (each tank)

PIPE SIZE:


INLET 3"

OUTLET 3"

DRAIN 2"

BRINE 1"

METER 3"

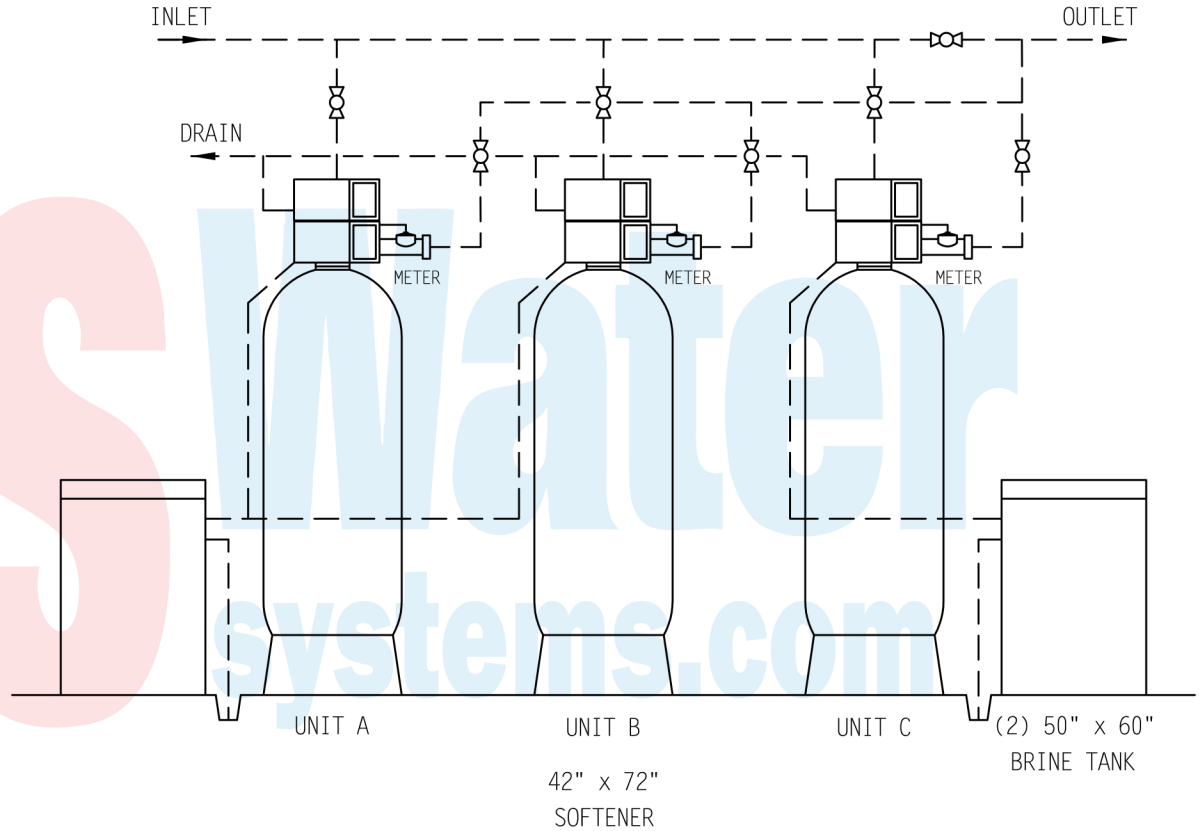

NOTE:

ALL DASHED PIPE, VALVES, AND FITTINGS NOT PROVIDED BY US WATER SYSTEMS

SPACE REQUIRED (APPROX)

250"L x 50"W x 101"H

PEAK FLOWS ARE NOT RECOMMENDED FOR EXTENDED PERIODS OF TIME.

BRINE TANK

TANK SIZE: 50" x 60"

POLYETHYLENE

CAPACITY:

500 gals. (each tank)

4,500 lbs./salt (each tank)

BRINE VALVE: 494

BRINE WELL: 5"

WEIGHT (APPROX)

TOTAL SHIPPING 9,200 lbs.

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM US WATER SYSTEMS



US WATER SYSTEMS

1209 COUNTRY CLUB RD
INDIANAPOLIS, IN 46234
1-800-608-8792

GENERAL ARRANGEMENT DWG.

SOFTENER 900K

SYSTEM 14-PROGRESSIVE

DRAWN BY:	M. CURTIS
DATE:	
CHECKED BY:	
PAGE 1 OF 1	

DWG. NO.	140-39-900-TX-9
----------	-----------------