


Warning: TO AVOID RISK OF ELECTRICAL SHOCK ,BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

- *Carefully unpack and place all parts on a soft surface
- *Drive hole on ceiling by tool to install crossbar(7)on ceiling.
- *Connect supply wire(2)and ground wire(3).
- *Fix ground wire(3) on crossbar by ground screw(9).
- *Fix crossbar(7) on ceiling and ceiling outlet box (1) by wood screw(10) and screw(11)separately .
- *Fix canopy (12) on ceiling by loop(13).

MOUNTING AND ASSEMBLY INSTRUCTIONS

Read All Instructions Before Beginning Installation

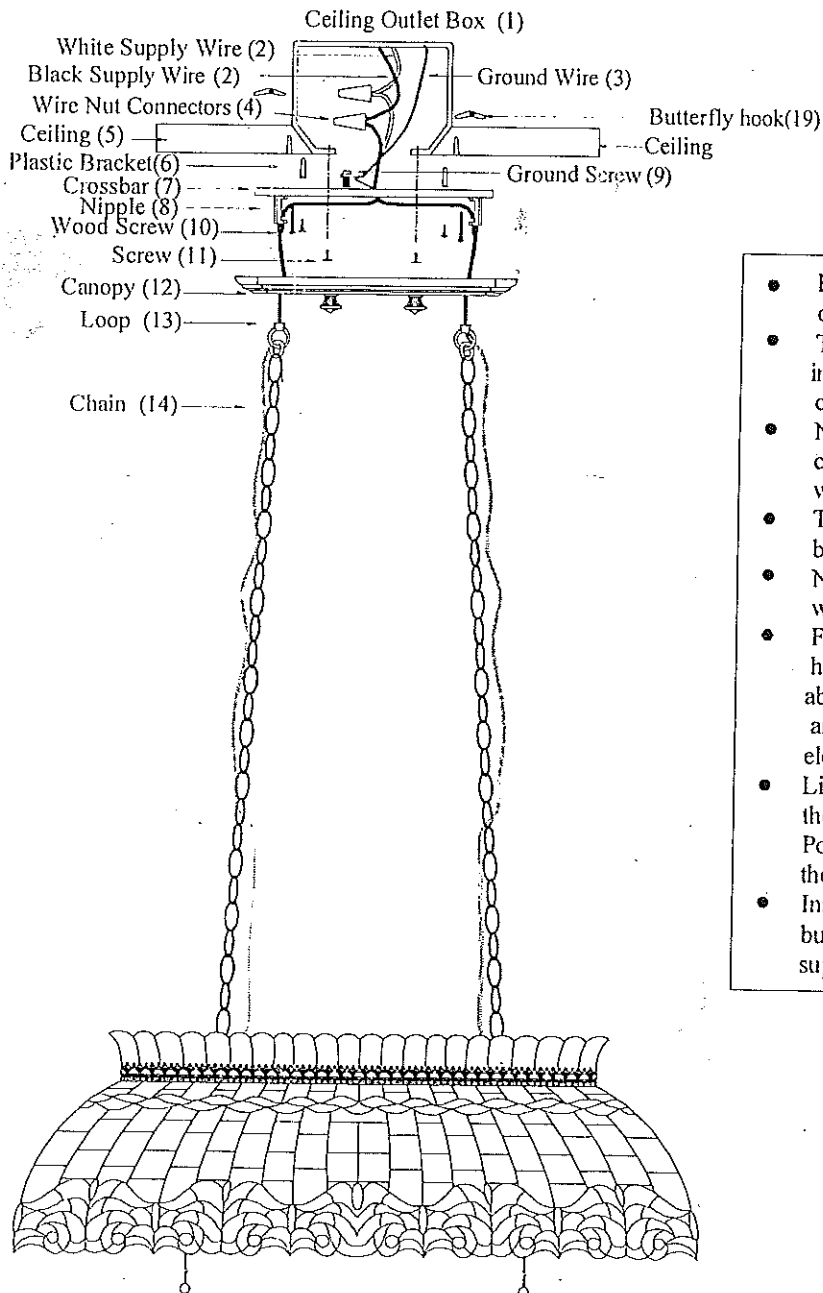

- Power at the fuse box should be disconnected before installing the fixture
- The fixture ground wire (bare or green installed wire) is NOT connected to current carrying supply wires.
- No bare wires are exposed outside the wire connectors when joining current carrying wires.
- The insulation on any of the wires must not be damaged during installation.
- No rough or sharp edges are in contact with any of the wires.
- Fixture wires are connected to the proper house supply wires. If you have any doubt about which house supplier wire is the white and which is the black, contact a licensed electrician.
- Light bulb(s) with wattage no greater than those specified for the fixture are used. Power is off when installing light bulb into the fixture.
- Insure the outlet box is well mounted to the building structure and will be able to support the weight of the fixture.