

METER SOFTENER

MODEL NO. 140-29-300-S-4M

CAPACITY:

MIN. 240,000 grs. @ 10 lbs./cu.ft.
 MAX. 300,000 grs. @ 15 lbs./cu.ft.

FLOW RATE:

NORMAL 60 gpm.
 PEAK 95 gpm.
 BACKWASH 15 gpm.

TANK SIZE: 24" x 72"
 COMPOSITE

MEDIA:

RESIN 10 cu.ft.
 GRAVEL 250 lbs.

PIPE SIZE:

INLET 2"
 OUTLET 2"
 DRAIN 1"
 BRINE 1/2"
 METER 2"

BRINE TANK

TANK SIZE: 30" x 48"
 POLYETHYLENE

CAPACITY:

145 gals.
 1200 lbs./salt

BRINE VALVE: 454HF
 BRINE WELL: 5"

WEIGHT (APPROX)


TOTAL SHIPPING 1,125 lbs.
 TOTAL OPERATING 2,600 lbs.

NOTE:

ALL DASHED PIPE, VALVES,
 AND FITTINGS NOT PROVIDED
 BY US WATER SYSTEMS

SPACE REQUIRED (APPROX)
 58"L x 30"W x 81"H

PEAK FLOWS ARE NOT
 RECOMMENDED FOR EXTENDED
 PERIODS OF TIME.

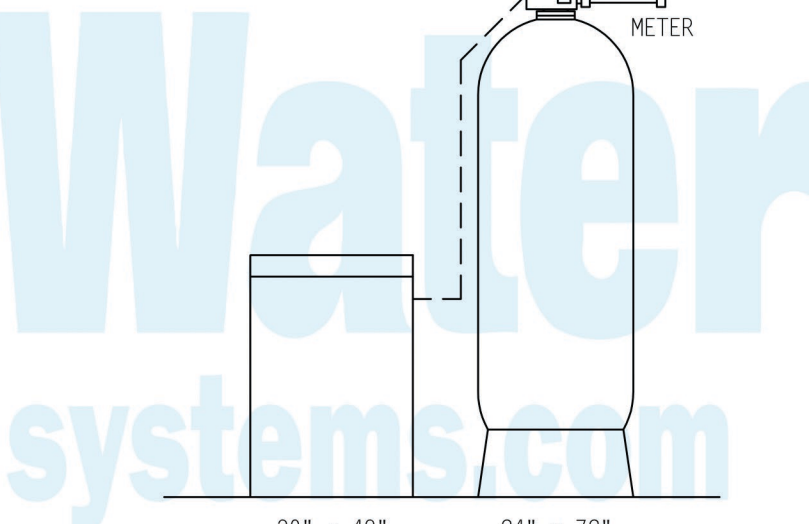


30" x 48"
BRINE TANK

24" x 72"
SOFTENER

DO NOT SCALE DRAWING

THIS DRAWING IS ISSUED IN CONFIDENCE AND CANNOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN OR REFERRED TO WITHOUT DIRECT WRITTEN PERMISSION FROM US WATER SYSTEMS

		US WATER SYSTEMS 1209 COUNTRY CLUB RD INDIANAPOLIS, IN 46234 1-800-608-8792	
		GENERAL ARRANGEMENT DWG. SOFTENER 300K SYSTEM 4- METER	
DRAWN BY: M. CURTIS DATE: CHECKED BY: PAGE 1 OF 1	DWG. NO. 140-29-300-S-4M		