

DATA: 30/08/2021

76U10010000: GM 10

DATI POMPA E MOTORE


n (rpm):	2800	fn (Hz):	50
H max (m):	6.50	Poli:	2
H min (m):	2.20	In (A):	1.75
Q min (mc/h):	3.00	PF:	0.98
Q max (mc/h):	12.00	C (mF):	6.3
Pn (kW):	0.30	Vc (V):	450
Pn (HP):	0.40	Classe di isolamento:	B
Tipo motore:	IM	Servizio:	S3
Fasi motore:	1~	Max temperatura del liquido (°C):	35
Un (V):	230	Peso (kg):	5.000

MATERIALI

Corpo pompa: Polimero

DATA: 30/08/2021

76U10010000: GM 10

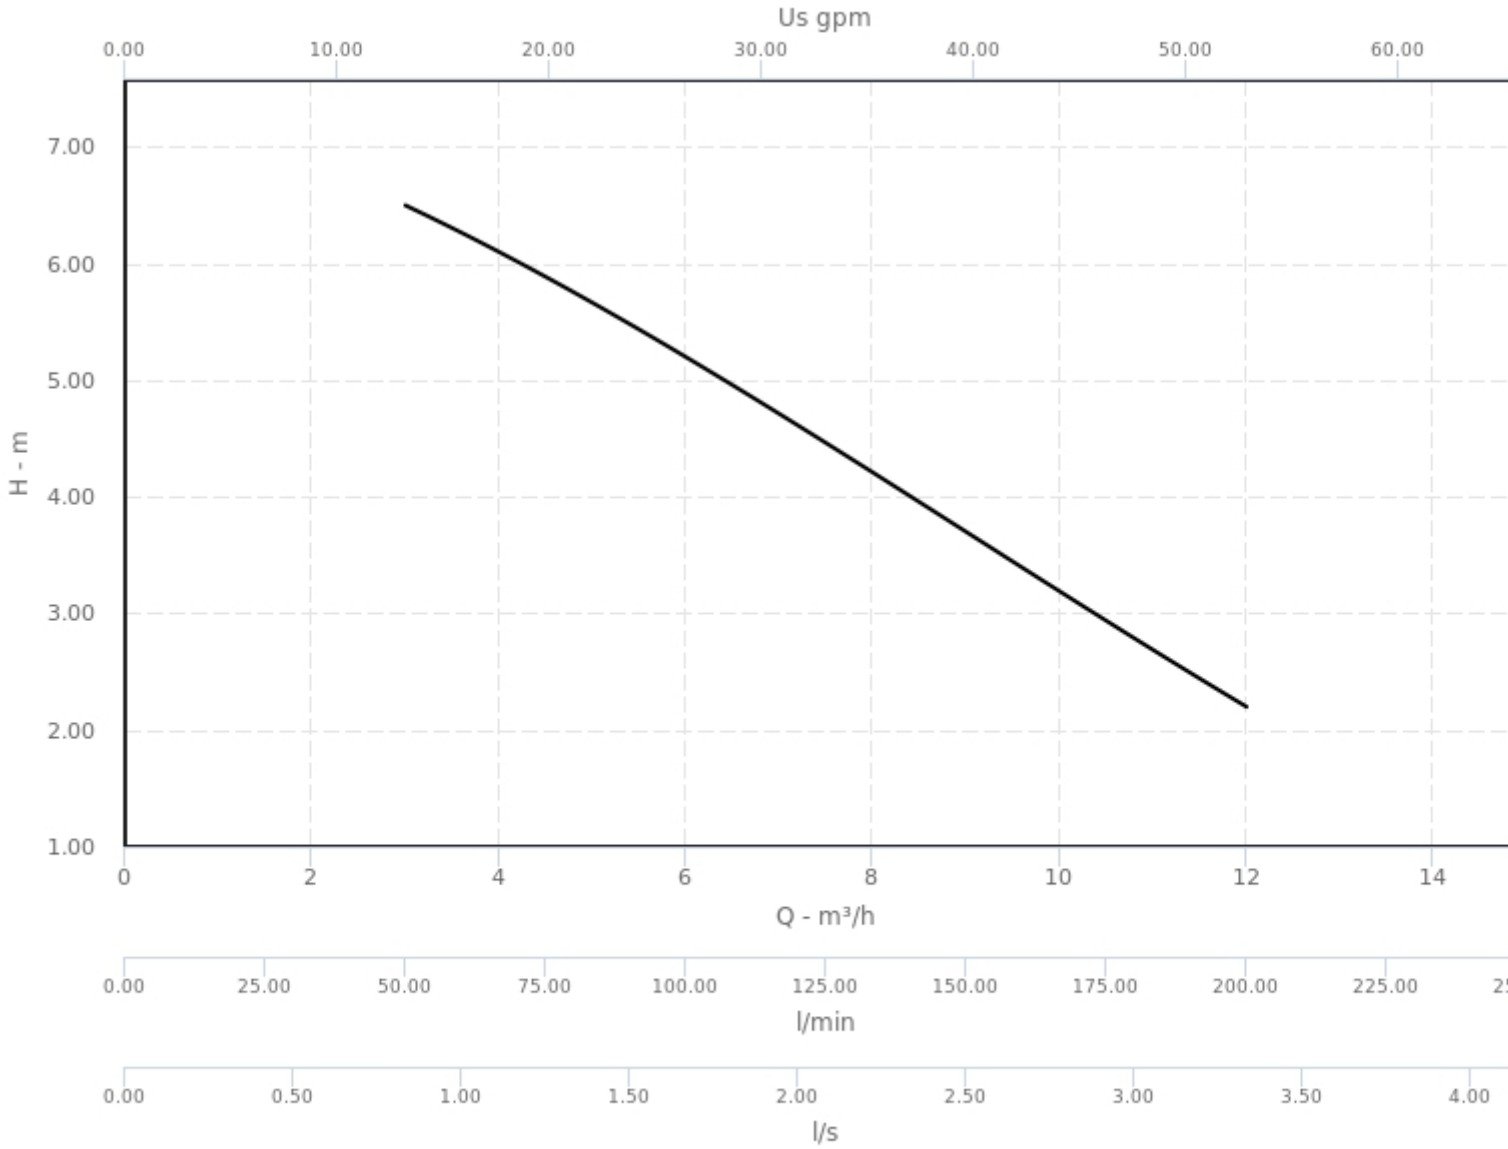

DATA: 30/08/2021

76U10010000: GM 10

DIMENSIONI (MM)

dn2: G1 1/2
a: 40.00 mm
fM: 212.00 mm
I1: 87.00 mm
I2: 81.00 mm
I4: 179
I5: 168
Lmin: 100.00 mm
Lmax: 300.00 mm

