


33HB Divers' Air

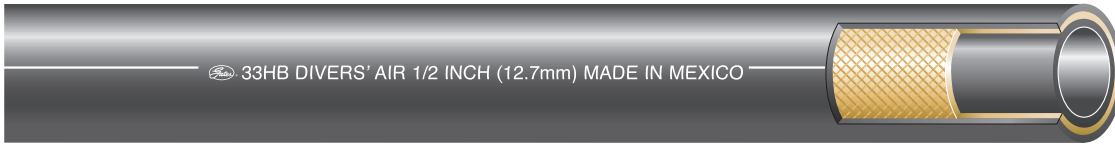

mm	mm	mm	Bar	Bar	mm	Kg/m	m	REF.
9.5	19.1	4.8	77.6	310	102	0.3	182.9-213.1	3333-0015
9.5	19.1	4.8	77.6	310	102	0.3	304.8-Plus m	3333-0017
12.7	23.9	5.6	69	276	127	0.4	15.24-91.14	3333-0038
12.7	23.9	5.6	69	276	127	0.4	304.8-Plus m	3333-0035

RECOMMENDED FOR

Handling mixtures of oxygen, helium and nitrogen gases customarily used in diving applications as air breathing hose. The kink resistance hose is designed for extra long wear under normal operating use.

TUBE

NBR black

REINFORCEMENT

Braided, high tensile synthetic textile cord

COVER

Neoprene, black. All sizes are perforated

TEMPERATURE

-40°C to +49°C continuous service

STANDARDS

Meets MIL-H-2815G Section 3.12.2 off-gassing for air breathing applications, especially diving.

BRANDING TRANSFER LABEL

GATES® 33HB DIVERS' AIR 3/8 INCH (9.5mm) MADE IN U.S.A.'

