



PRODUCT CATALOGUE LED LIGHTING



LED SHOEBOX LIGHT
PARKING LOT/ AREA LIGHT FIXTURE

UL & DLC CERTIFIED



LED SHOEBOX LIGHT

PARKING LOT / AREA LIGHT FIXTURE



OVERVIEW

These Outdoor Shoebox lights are specially manufactured for parking lots , LED SHOEBOX Lighting series can be widely used in Urban roads, industrial areas, residential areas, sidewalks, squares, parks, schools, gardens etc.

FEATURES

- ✓ Seoul Chip, high CRI.
- ✓ IP65 driver, input voltage 100-277VAC.
- ✓ adjusted through output cable with 1-10V.
- ✓ Easy to install and operate.
- ✓ Energy saving, long lifespan.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ No UV or IR in the beam.



150W




240W & 300W



450W

PRODUCT SPECIFICATION

-	150W LED	240W LED	300W LED	450W LED
Power Wattage	150W	240W	300W	450W
Kelvins	5700K	5700K	5700K	5700K
Lumens	21000 LMS	33600 LMS	42000 LMS	60,750 LMS
Efficacy (Lm/Watt)	140LM/Watt	140LM/Watt	140LM/Watt	135LM/Watt
Input Voltage	100-277V & 480V	100-277V & 480V	100-277V & 480V	100-277V
IP Grade	IP65	IP65	IP65	IP65
Bracket Type	AM Bracket	AM Bracket	AM Bracket	AM Bracket
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours
Certification	UL/DLC	UL/DLC	UL/DLC	UL/DLC
Photocell	with /without	with /without	with /without	with /without
Warranty	5 Years	5 Years	5 Years	5 Years

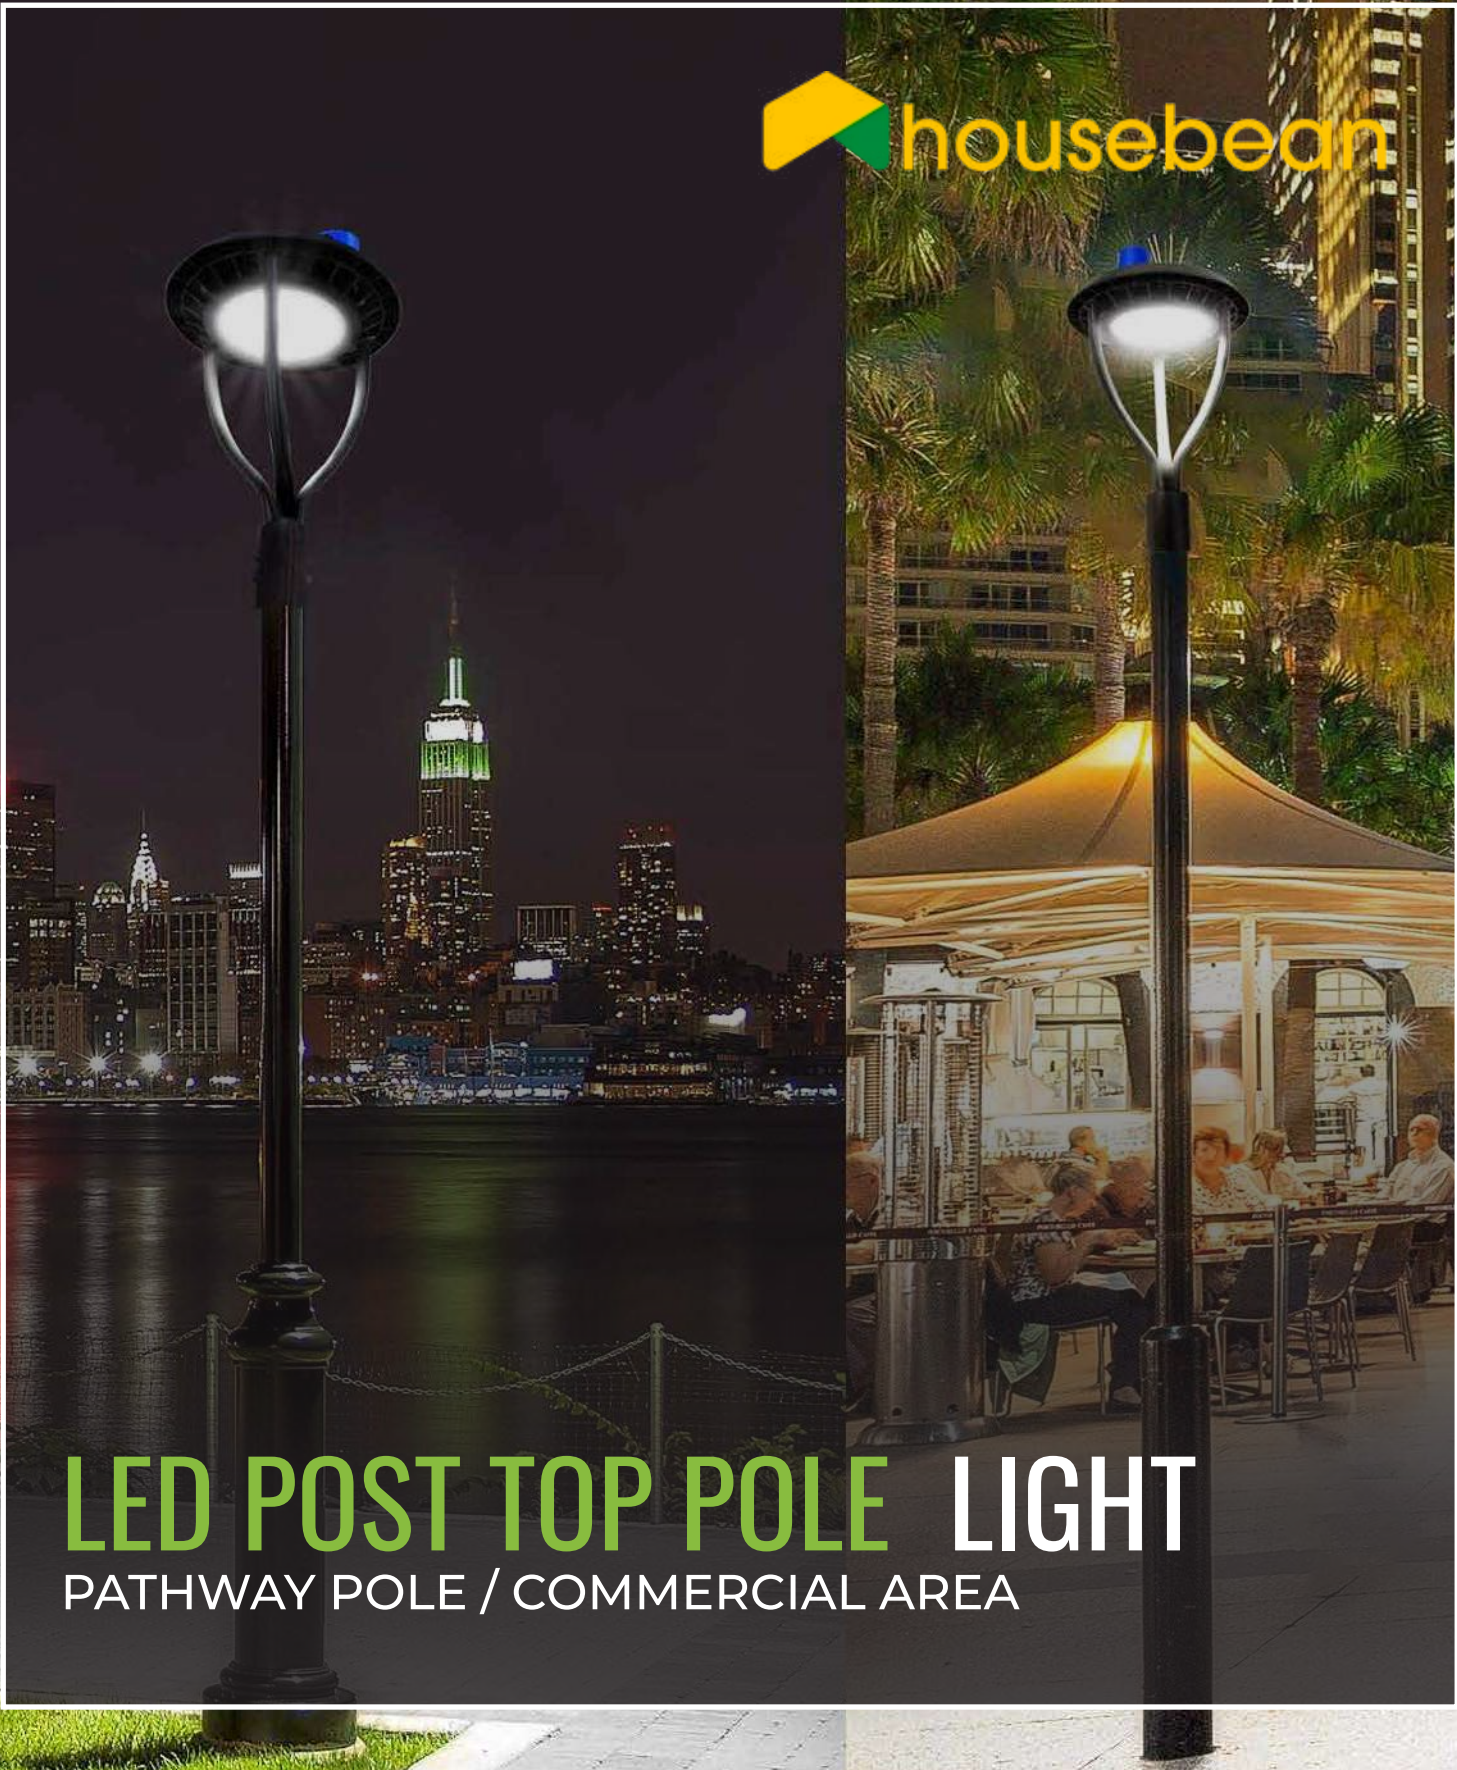

LED POST TOP POLE LIGHT

PATHWAY POLE / COMMERCIAL AREA

UL & DLC CERTIFIED



LED POST TOP POLE

PATHWAY POLE / COMMERCIAL AREA



OVERVIEW

Post Top Pole fixture is designed for circular distribution, our LED Type V Area Light is perfect for roadways, intersections, or commercial parking lots. Housed in die-cast aluminum, the long-lasting LED distributes light evenly across all angles for at least 50000 hours.


FEATURES

- ✓ Seoul Chip, high CRI.
- ✓ IP65 driver, input voltage 100-277VAC.
- ✓ adjusted through output cable with 1-10V.
- ✓ Easy to install and operate.
- ✓ Energy saving, long lifespan.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ No UV or IR in the beam.

PRODUCT SPECIFICATION

-	50W LED	75W LED	150W LED
Power Wattage	50W	75W	150W
Kelvins	5000K	CCT Tunable (3000K, 4000K & 5000K)	5000K
Lumens	6750 LMS	10,125 LMS	20,250 LMS
Efficacy (Lm/Watt)	135LM/Watt	135LM/Watt	135LM/Watt
Input Voltage	100-277V	100-277V	100-277V
IP Grade	IP65	IP65	IP65
Life Span	50000 Hours	50000 Hours	50000 Hours
Certification	UL/DLC	UL/DLC	UL/DLC
Warranty	5 Years	5 Years	5 Years





30 N Gould St Ste R Sheridan, WY 82801

LED MINI WALLPACKS LIGHT

RESIDENTIAL AREAS / SIDEWALKS

UL & DLC CERTIFIED



LED MINI WALLPACKS

RESIDENTIAL AREAS / SIDEWALKS

OVERVIEW

These outdoor mini Wall pack lights are specially manufactured to cover small areas and it can be widely used in industrial areas, residential areas, sidewalks, squares, parks, schools, gardens, etc.

FEATURES

- ✓ Easy to install and operate.
- ✓ Energy-saving, long lifespan.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ No UV or IR in the beam.
- ✓ Photocell Compatible.
- ✓ IP65 driver, input voltage 100-277VAC.
- ✓ Outdoor Rated

PRODUCT SPECIFICATION

-	15W LED	20W LED
Power Wattage	15W	20W
Efficacy (Lm/Watt)	135LM/Watt	135LM/Watt
Input Voltage	100-277V	100-277V
Lumens	2025	2700
Kelvins	5700K	5700K
Certification	UL/DLC	UL/DLC
Life Span	50000 Hours	50000 Hours
Photocell	With/Without	With/Without
Warranty	5 Years	5 Years





LED TRADITIONAL WALLPACKS

RESIDENTIAL AREAS / SIDEWALKS

UL & DLC CERTIFIED



LED TRADITIONAL WALLPACKS LIGHTS

RESIDENTIAL AREAS / SIDEWALKS WALL FIXTURE

OVERVIEW

These Outdoor Wall pack lights are specially manufactured to cover large areas and it can be widely used in industrial , residential building, sidewalks, squares, parks, schools, gardens, etc.



FEATURES

- ✓ Easy to install and operate.
- ✓ Energy-saving, long lifespan.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ No UV or IR in the beam.
- ✓ Photocell Compatible.
- ✓ IP65 driver, input voltage 100-277VAC.



PRODUCT SPECIFICATION

-	60W LED	120W LED
Power Wattage :	55W	120W
Efficacy (Lm/Watt)	130LM/Watt	130LM/Watt
Input Voltage	100-277V	100-277V
Lumens	7800	15600
Kelvins	5700K	5700K
Certification	UL/DLC	UL/DLC
Life Span	50000 Hours	50000 Hours
Photocell	With/Without	With/Without
Warranty	5 Years	5 Years





LED ROTATABLE WALLPACK

RESIDENTIAL AREAS / SIDEWALKS

UL & DLC CERTIFIED

ROTATABLE WALLPACKS

RESIDENTIAL AREAS / SIDEWALKS

WALL FIXTURE



OVERVIEW

These Rotatable LED Outdoor Wall Packs are manufactured with a Rotating option which helps angle the light where its more needed , very bright nice looking and durable with 5 years of warranty



FEATURES

- ✓ Easy to install and operate.
- ✓ Energy-saving, long lifespan.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ No UV or IR in the beam.
- ✓ Photocell Compatible.
- ✓ IP65 driver, input voltage 100-277VAC.
- ✓ Adjustable Lighting



PRODUCT SPECIFICATION

-	40W LED	80W LED
Power Wattage :	40W	80W
Efficacy (Lm/Watt)	130LM/Watt	130LM/Watt
Input Voltage	100-277V	100-277V
Lumens	5200	10400
Kelvins	5700K	5700K
Certification	UL/DLC	UL/DLC
Life Span	50000 Hours	50000 Hours
Photocell	With/Without	With/Without
Warranty	5 Years	5 Years





LED UFO HIGH BAYS

COMMERCIAL AREAS / WAREHOUSES / FACTORIES

UL & DLC CERTIFIED



LED UFO HIGH BAYS

COMMERCIAL AREAS / WARE HOUSES LIGHT



OVERVIEW

This LED UFO High bay is designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for outdoor and indoor illumination at Warehouses, garages, gas stations, public spaces, schools, etc.



FEATURES

- ✓ UL DLC certified
- ✓ input voltage 100-277VAC
- ✓ I No UV or IR in the beam
- ✓ Light is soft and uniform, safe to eyes.
- ✓ CRI >80
- ✓ Greenland Eco-friendly without mercury.
- ✓ China brand IP65 driver,

PRODUCT SPECIFICATION

-	100W LED	150W LED	200W LED	240W LED
Power Wattage :	100W	150W	200W	240W
Efficacy (Lm/Watt)	145LM/Watt	145LM/Watt	145LM/Watt	145LM/Watt
Input Voltage	100-277V	100-277V	100-277V	100-277V
Lumens	14500	21750	29000	34800
Kelvins	5700K	5700K	5700K	5700K
Certification	UL/DLC	UL/DLC	UL/DLC	UL/DLC
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours
Motion Sensor:	With/Without	With/Without	With/Without	With/Without
Warranty	5 Years	5 Years	5 Years	5 Years



LED LINEAR HIGH BAYS

WAREHOUSE / SPORT FACILITIES / GYMS

UL & DLC CERTIFIED




LED LINEAR HIGH BAYS

WAREHOUSE / SPORT FACILITIES



OVERVIEW

The large space between ceiling and floor necessitates that a linear high bay light provide a high lumen output and the light needs to be focused down and out from the fixture. Led Linear high bays providing highly effective delivered lumens for indoor illumination at Warehouse, storage and gyms.

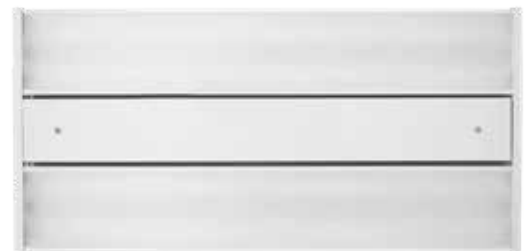

FEATURES

- ✓ UL DLC certified
- ✓ input voltage 100-277VAC
- ✓ I No UV or IR in the beam
- ✓ Light is soft and uniform, safe to eyes.
- ✓ CRI >80
- ✓ Greenland Eco-friendly without mercury.
- ✓ China brand IP65 driver,

PRODUCT SPECIFICATION

-	110W LED	165W LED	220W LED	300W LED
Power Wattage :	110W	165W	220W	300W
Efficacy (Lm/Watt)	145LM/Watt	145LM/Watt	145LM/Watt	145LM/Watt
Input Voltage	100-277V	100-277V	100-277V	100-277V
Lumens	15950	23925	31900	43500
Kelvins	5700K	5700K	5700K	5700K
Certification	UL/DLC	UL/DLC	UL/DLC	UL/DLC
Life Span	50000 Hours	50000 Hours	50000 Hours	50000 Hours
Motion Sensor	With/Without	With/Without	With/Without	With/Without
Size:	2FT	2FT	2FT & 4FT	2FT & 4FT
Warranty	5 Years	5 Years	5 Years	5 Years



LED TUBE LIGHTS

WORKSHOPS / SUPER MARKETS

UL & DLC CERTIFIED



LED TUBE LIGHTS

WORKSHOPS / SUPER MARKETS



OVERVIEW

T8 Tube emits high lumens. It's a replacement for old florescent fixtures and lasts 3 times longer, which reduces costly repairs and replacements. The tube has built in driver. It's constructed of die cast aluminum, steel, and has a shatterproof lens.

PRODUCT SPECIFICATION

-	T8 2FT 24" LED Tube	T8 3FT 36" LED Tube	T8 4FT 48" LED Tube	T8 8FT 96" LED Tube
Size	2FT 24"	3FT 36"	4FT 48"	8FT 96"
Power	10W	15W	20W / 22W /24W	40W & 60W
Input Voltage	AC 100-277Vac	AC 100-277Vac	AC 100-277Vac	AC 100-277Vac
Lumens	1050 Lumens	1600 Lumens	2000-2400 Lumens	4800LM & 6000LM
Kelvins	3000K,4000K,5000K &6000K	3000K,4000K,5000K &6000K	3000K,4000K,5000K &6000K	3000K,4000K,5000K &6000K
Cover Type	Clear,Frosted,Stripy	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy
CRI	>80Ra	>80Ra	>80Ra	>80Ra
Driver	Built In	Built In	Built In	Built In
Material	AL&PC Cover	AL&PC Cover	AL&PC Cover	AL&PC Cover
Base Type	G13	G13	G13	G13,FA8,R17D
Installation	With/Without Ballast	With/Without Ballast	With/Without Ballasts	With/Without Ballast
Certification	UL,ETL OR DLC	UL,ETL OR DLC	UL,ETL OR DLC	UL,ETL OR DLC
Warranty	3-5 Years	3-5 Years	3-5 Years	3-5 Years



LED INTEGRATED LINKABLE TUBES LIGHTS

SUPER STORES / OFFICES

UL & DLC CERTIFIED

LED INTEGRATED LINKABLE TUBES LIGHTS

WORKSHOP / GAS STATION / GARAGE



OVERVIEW

Perfect for lighting large indoor areas, Linkable LED shop lights are the modern-day solution to the problems that arise due to inadequate lighting conditions. Apart from being Stylish and energy-efficient, these lights allow daisy-chaining. LED integrated t5 tubes are suitable for use in vast indoor areas, such as hallways and corridors.

PRODUCT SPECIFICATION

-	Integrated Tube 2FT	Integrated Tube 3FT	Integrated Tube 4FT
Size:	2FT 24"	3FT 36"	4FT 48"
Power:	10W	15W	22W
Input Voltage:	AC 100-277Vac	AC 100-277Vac	AC 100-277Vac
Lumens	1250 Lumens	1875 Lumens	2750 Lumens
Kelvins	6000-6500K	6000-6500K	6000-6500K
Cover Type	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy
CRI	>80Ra	>80Ra	>80Ra
Accessories	Clips & Power Cord 8" Wire	Clips & Power Cord 8" Wire	Clips & Power Cord 8" Wire
Material	AL&PC Cover	AL&PC Cover	AL&PC Cover
Installation :	Plug in Play	Plug in Play	Plug in Play
Certification	ETL/DLC	ETL/DLC	ETL/DLC
Warranty	3 Years	3 Years	3 Years

LED INTEGRATED LINKABLE TUBES LIGHTS



WORKSHOP / GAS STATION / GARAGE

FEATURES

- ✓ ETL certified.
- ✓ Easy to install and operate.
- ✓ Connect Up To 6 Lights.
- ✓ Energy-saving, long lifespan.
- ✓ Free Accessories in Box.
- ✓ Light is soft and uniform, safe to eyes.
- ✓ Aluminum body, Glass Cover, Aluminum Heat Sink .
- ✓ No UV or IR in the beam.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Photocell Compatible.
- ✓ 3-Year Warranty



PRODUCT SPECIFICATION

-	Integrated Tube 5FT	Integrated Tube 6FT	Integrated Tube 8FT
Size:	5FT 60"	6FT 72"	8FT 96"
Power:	32W	36W	60W
Input Voltage:	AC 100-277Vac	AC 100-277Vac	AC 100-277Vac
Lumens	4000 Lumens	4500 Lumens	7500 Lumens
Kelvins	6000-6500K	6000-6500K	6000-6500K
Cover Type	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy
CRI	>80Ra	>80Ra	>80Ra
Accessories	Clips & Power Cord 8" Wire	Clips & Power Cord 8" Wire	Clips & Power Cord 8" Wire
Material	AL&PC Cover	AL&PC Cover	AL&PC Cover
Installation :	Plug in Play	Plug in Play	Plug in Play
Certification	ETL/DLC	ETL/DLC	ETL/DLC
Warranty	3 Years	3 Years	3 Years



LED INTEGRATED COOLER LIGHTS

WALKING COOLER DOOR FIXTURE

UL & DLC CERTIFIED



LED INTEGRATED COOLER TUBE

WALKING COOLER DOOR FIXTURE



OVERVIEW

Integrated cooler fixture lights gives your cooling space a bright modern look .The sleek style shines light in 3 angles and make the products more pop up. The design is constructed from solid aluminum finish and can be use in any type of cooling space eg,gas stations , shopping centers coolers .



FEATURES

- ✓ ETL DLC certified.
- ✓ Vapor Proof.
- ✓ Easy to install and operate.
- ✓ Connect Up To 9 Lights.
- ✓ Energy-saving, long lifespan.
- ✓ Free Accessories in Box.
- ✓ Light is soft and uniform, safe to eyes.



PRODUCT SPECIFICATION

-	Integrated Tube 5FT	Integrated Tube 6FT
Size	5FT 60"	6FT 72"
Power	32W	40W
Input Voltage	AC 100-277Vac	AC 100-277Vac
Lumens	4000 Lumens	5000 Lumens
Kelvins	6000K	6000K
Cover Type	Clear ,Frosted & Stripy	Clear ,Frosted & Stripy
CRI	>80Ra	>80Ra
Accessories	Clips & Power Cord 8" Wire	Clips & Power Cord 8" Wire
Material	AL&PC Cover	AL&PC Cover
Max Connection	9 Pcs	8 Pcs
Certification	ETL DLC	ETL DLC
Warranty	3 Years	3 Years





LED FLOOD LIGHTS

GAS STATIONS / HOTEL MOTEL / CONVENIENCE STORE
OUTDOOR BUILDING LIGHTS

UL & DLC CERTIFIED



LED SLIM FLOOD LIGHTS

GAS STATIONS / HOTEL MOTEL / CONVENIENCE STORE
OUTDOOR BUILDING LIGHTS



OVERVIEW

This LED Flood Light is designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for outdoor illumination at hotels, garages, gas stations, public spaces, schools, universities, hospitals, factory floor, libraries, square, supermarkets, railway stations, advertising lighting, etc.



FEATURES

- ✓ Light is soft and uniform, safe to eyes.
- ✓ Seoul Semiconductor Chip, high CRI.
- ✓ Greenland Eco-friendly without mercury.
- ✓ IP65 driver, input voltage 100-277VAC
- ✓ No UV or IR in the beam
- ✓ China brand IP65 driver
- ✓ 60%~80% Energy Savings

PRODUCT SPECIFICATION

-	20W LED	30W LED	50W LED	100W LED
POWER WATTAGE :	20W	30W	50W	100W
KELVINS	5700K	5700K	5700K	5700K
LUMENS	2400LM	3750LM	6250LM	12000 LM
EFFICACY (LM/WATT)	120LM/W	125LM/W	125LM/W	120LM/W
INPUT VOLTAGE	100-277V	100-277V	100-277V	100-277V
IP GRADE	IP65	IP65	IP65	IP65
LIFE SPAN	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
CERTIFICATION	UL/DLC	UL/DLC	UL/DLC	UL/DLC
WARRANTY	5 Years	5 Years	5 Years	5 Years

LED KNUCKLE FLOOD LIGHTS

GAS STATIONS / HOTEL MOTEL / CONVENIENCE STORE
OUTDOOR BUILDING LIGHTS

OVERVIEW

This LED Flood Light is designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for outdoor illumination at hotels, garages, gas stations, public spaces, schools, universities, hospitals, factory floor, libraries, square, supermarkets, railway stations, advertising lighting, etc.

FEATURES

- ✓ Light is soft and uniform, safe to eyes.
- ✓ Seoul Semiconductor Chip, high CRI.
- ✓ Greenland Eco-friendly without mercury.
- ✓ IP65 driver, input voltage 100-277VAC
- ✓ No UV or IR in the beam
- ✓ China brand IP65 driver
- ✓ 60%~80% Energy Savings

PRODUCT SPECIFICATION

-	30W LED	50W LED
POWER WATTAGE :	30W	50W
KELVINS	5700K	5700K
LUMENS	3750LM	6250LM
EFFICACY (LM/WATT)	125LM/W	125LM/W
INPUT VOLTAGE	100-277V	100-277V
BASE TYPE:	Knuckle	Knuckle
IP GRADE	IP65	IP65
LIFE SPAN	50,000 Hours	50,000 Hours
CERTIFICATION	UL/DLC	UL/DLC
WARRANTY	5 Years	5 Years



LED GIANT FLOOD LIGHTS



GAS STATIONS / HOTEL MOTEL / CONVENIENCE STORE
OUTDOOR BUILDING LIGHTS

OVERVIEW

This LED Flood Light is designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for outdoor illumination at hotels, garages, gas stations, public spaces, schools, universities, hospitals, factory floor, libraries, square, supermarkets, railway stations, advertising lighting, etc.



FEATURES

- ✓ Light is soft and uniform, safe to eyes.
- ✓ Seoul Semiconductor Chip, high CRI.
- ✓ Greenland Eco-friendly without mercury.
- ✓ IP65 driver, input voltage 100-277VAC
- ✓ No UV or IR in the beam
- ✓ China brand IP65 driver
- ✓ 60%~80% Energy Savings



PRODUCT SPECIFICATION

-	150W LED	240W LED	300W LED
POWER WATTAGE :	150W	240W	300W
KELVINS	5700K	5700K	5700K
LUMENS	18750 LM	30000 LMS	37500 LMS
EFFICACY (LM/WATT)	125LM/W	125LM/W	125LM/W
INPUT VOLTAGE	100-277V	100-277V	100-277V
IP GRADE	IP65	IP65	IP65
LIFE SPAN	50,000 HOURS	50,000 HOURS	50,000 HOURS
CERTIFICATION	UL/DLC	UL/DLC	UL/DLC
WARRANTY	5 YEARS	5 YEARS	5 YEARS





LED JBOX NEW INSTALATION DOWNLIGHTS

HOUSES / OFFICES / INDOOR SPACES

UL & DLC CERTIFIED



LED JBOX NEW INSTALATION DOWNLIGHTS



HOUSES / OFFICES / INDOOR SPACES

OVERVIEW

The lumen output of this light is 1000LM with long lifespan, and high energy efficiency. Housing is made of aluminum alloy and PC for excellent heat dissipation. This led has 2 clips to make the light stable in hole, very bright and contemporary looking structure with ETL or Energy star approved.



FEATURES

- ✓ ETL Approved.
- ✓ 120VAC.
- ✓ 6" white Trim.
- ✓ Color Temperature Adjustable (3K-5K)
- ✓ Energy saving, long lifespan.
- ✓ Instant On/Off
- ✓ Instant start, NO flickering, NO humming.

PRODUCT SPECIFICATION

-	4" JBOX Downlight	6" JBOX Downlight	8" JBOX Downlight
Watt	10W	15W	30W
Size	4"	6"	8"
Input Voltage:	120V AC	120V AC	120V AC
Lumens	650 LM	975 LM	2250 LM
Kelvins	3000K,4000K,5000K,6000K	3000K,4000K,5000K,6000K	3000K,4000K,5000K,6000K
Dimmable	YES	YES	YES
CRI	>90	>90	>90
Trim Shape	Round/Square	Round/Square	Round/Square
Life	50000 Hours	50000 Hours	50000 Hours
Certification	ETL/Energy Star	ETL/Energy Star	ETL/Energy Star
Warranty	3 Years	3 Years	3 Years

LED RECESSED RETROFIT DOWNLIGHTS

HOUSES / OFFICES / INDOOR SPACES

OVERVIEW

The lumen output of this light is 1000LM with long lifespan, and high energy efficiency. Housing is made of aluminum alloy and PC for excellent heat dissipation. This led has 2 clips to make the light stable in hole, very bright and contemporary looking structure with ETL or Energy star approved.



FEATURES

- ✓ ETL Approved.
- ✓ 120VAC.
- ✓ 6" white Trim.
- ✓ Color Temperature Adjustable (3K-5K)
- ✓ Energy saving, long lifespan.
- ✓ Instant On/Off
- ✓ Instant start, NO flickering, NO humming.



PRODUCT SPECIFICATION

-	4" LED	6" LED
Watt	10W	15W
Size	4"	6"
Input Voltage:	120V AC	120V AC
Lumens	650 LM	975 LM
Kelvins	CCT Tuneable 3k, 4k, 5k	CCT Tuneable 3k, 4k, 5k
Dimmable	YES	YES
CRI	>90	>90
Trim Shape	Round/Square	Round/Square
Life	50000 Hours	50000 Hours
Certification	ETL/Energy Star	ETL/Energy Star
Warranty	3 Years	3 Years



LED RECESSED/DOWNLIGHTS JBOX (SEPERATE DRIVER)



HOUSES / OFFICES / INDOOR SPACES

OVERVIEW

The lumen output of this light is 1000LM with long lifespan, and high energy efficiency. Housing is made of aluminum alloy and PC for excellent heat dissipation. This led has 2 clips to make the light stable in hole, very bright and contemporary looking structure with ETL or Energy star approved.




FEATURES

- ✓ ETL Approved.
- ✓ 120VAC.
- ✓ 6" white Trim.
- ✓ Color Temperature Adjustable (3K-5K)
- ✓ Energy saving, long lifespan.
- ✓ Instant On/Off
- ✓ Instant start, NO flickering, NO humming.

PRODUCT SPECIFICATION

-	4" JBOX (Seperate Driver)	6" JBOX (Seperate Driver)	8" JBOX (Seperate Driver)	10" JBOX (Seperate Driver)
Watt	10W	15W	24W	30W
Size	4"	6"	8"	10"
Input Voltage:	120V AC	120V AC	120V AC	120V AC
Lumens	650 LM	1000 LM	1560 LM	1950 LM
Kelvins	CCT Tuneable 3k, 4k, 5k	CCT Tuneable 3k, 4k, 5k	CCT Tuneable 3k, 4k, 5k	CCT Tuneable 3k, 4k, 5k
Dimmable	YES	YES	YES	YES
CRI	>90	>90	>90	>90
Trim Shape	Round	Round	Round	Round
Life	50000 Hours	50000 Hours	50000 Hours	50000 Hours
Certification	ETL/Energy Star	ETL/Energy Star	ETL/Energy Star	ETL/Energy Star
Warranty	3 Years	3 Years	3 Years	3 Years

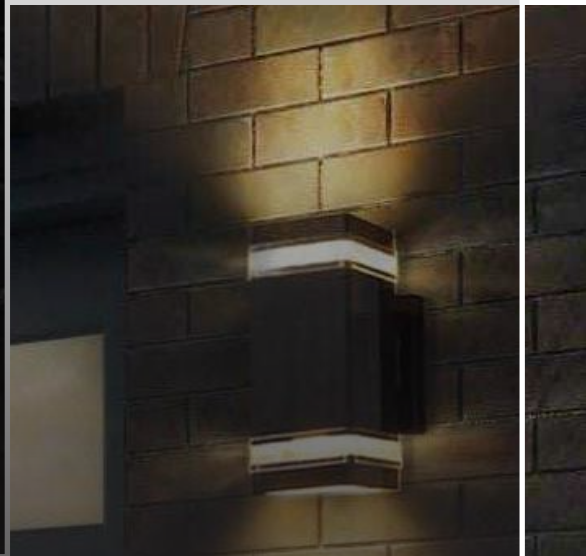

SQUARE UP & DOWN WALLPACKS

OUTDOOR BUILDINGS AMBIENCE

UL & DLC CERTIFIED



LED SQUARE UP & DOWN WALLPACK

OUTDOOR BUILDINGS AMBIENCE



OVERVIEW

Square Up & Down Wallpack is designed for longevity in any outdoor environment, our Wall Packs boasts products that are IP-Rated, Dark Sky Friendly, and our Wall packs designed with durability and quality in mind




FEATURES

- ✓ Light is soft and uniform, safe to eyes.
- ✓ Aluminum body, Glass Cover, Aluminum Heat Sink .
- ✓ No UV or IR in the beam.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Photocell Compatible.
- ✓ IP66 driver, input voltage 100-277VAC.
- ✓ Energy-saving, long lifespan.

PRODUCT SPECIFICATION

-	12W (2x6W) Square Wallpack	18W (2x9W) Square Wallpack
Power Wattage :	12W (2x6W)	18W (2x9W)
Input Voltage	100-277V ac 50HZ/60HZ	100-277V ac 50HZ/60HZ
Beam Angle	15°/30°/60°	15°/30°/60°
LED Color	Red/Green/Blue/CW/WW/RGB	Red/Green/Blue/CW/WW/RGB
Housing Color	Brown/Black/Gray	Brown/Black/Gray
IP Grade	IP66	IP66
Certification	ETL	ETL
Height Coverergae	20FT	25FT
Warranty	5-Year	5-Year

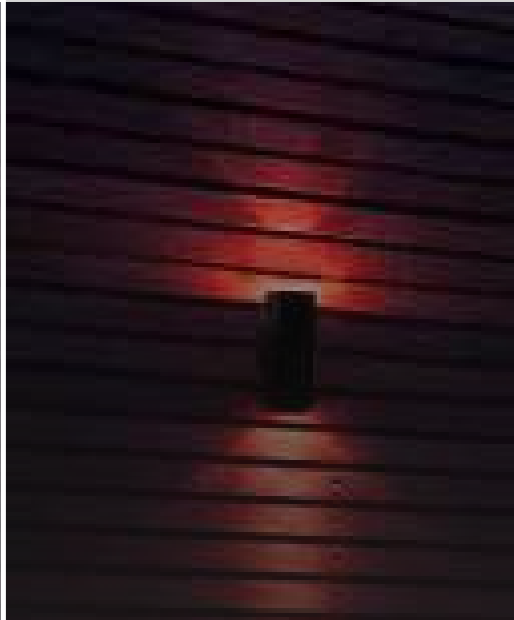

UP & DOWN WALLPACKS

OUTDOOR BUILDINGS AMBIENCE

UL & DLC CERTIFIED

UP & DOWN WALLPACK

OUTDOOR BUILDINGS AMBIENCE



OVERVIEW

Up & Down Wallpack is designed for longevity in any outdoor environment, our Wall Packs boasts products that are IP-Rated, Dark Sky Friendly, and our Wall packs designed with durability and quality in mind



FEATURES

- ✓ ETL certified.
- ✓ Easy to install and operate.
- ✓ IP66 driver, input voltage 100-277VAC.
- ✓ Energy-saving, long lifespan.
- ✓ Instant On/Off
- ✓ Light is soft and uniform, safe to eyes.
- ✓ Aluminum body, Glass Cover, Aluminum Heat Sink



PRODUCT SPECIFICATION

-	24W (2x12W) Up & Down	48W (2x24W) Up & Down	72W (2x36W) Up & Down
Power Wattage :	24W (2x12W)	48W (2x24W)	72W (2x36W)
Input Voltage	100-277V ac 50HZ/60HZ	100-277V ac 50HZ/60HZ	100-277V ac 50HZ/60HZ
Beam Angle	15°/30°/60°	15°/30°/60°	15°/30°/60°
LED Color	Red/Green/Blue/CW/WW/RGB	Red/Green/Blue/CW/WW/RGB	Red/Green/Blue/CW/WW/RGB
Housing Color	Brown/Black/Gray	Brown/Black/Gray	Brown/Black/Gray
IP Grade	IP66	IP66	IP66
Certification	ETL	ETL	ETL
Height Coverergae	27FT	50 FT	60FT
Warranty	5 Year	5 Year	5 Year



LED UP ONLY WALLPACKS

OUTDOOR BUILDINGS AMBIENCE

UL & DLC CERTIFIED



UP & DOWN WALLPACK

OUTDOOR BUILDINGS AMBIENCE



OVERVIEW

LED Up Only Wallpack is designed for longevity in any outdoor environment, our Wall Packs boasts products that are IP-Rated, Dark Sky Friendly, and our Wall packs designed with durability and quality in mind




FEATURES

- ✓ ETL certified.
- ✓ Easy to install and operate.
- ✓ IP66 driver, input voltage 100-277VAC.
- ✓ Energy-saving, long lifespan.
- ✓ Instant On/Off
- ✓ Light is soft and uniform, safe to eyes.
- ✓ Aluminum body, Glass Cover, Aluminum Heat Sink



PRODUCT SPECIFICATION

-	36W (1x36W) LED UP Only	48W (1x48W) LED UP Only
Power Wattage :	36W (1x36W)	48W (1x48W)
Input Voltage	100-277V ac 50HZ/60HZ	100-277V ac 50HZ/60HZ
Beam Angle	15°/30°/60°	15°/30°/60°
LED Color	Red/Green/Blue/CW/WW/RGB	Red/Green/Blue/CW/WW/RGB
Housing Color	Brown/Black/Gray	Brown/Black/Gray
IP Grade	IP66	IP66
Certification	ETL	ETL
Height Coverergae	50FT	70FT
Warranty	5-Year	5-Year

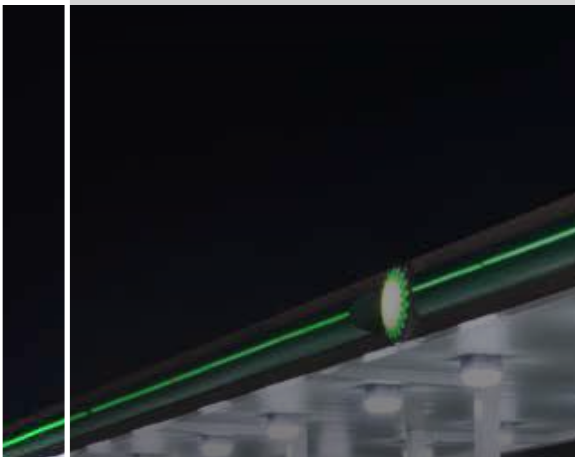

LED CANOPY LIGHTS

GAS STATION, HIGH CEILING
OUTDOOR APPLICATION

UL & DLC CERTIFIED



LED CANOPY LIGHTS

GAS STATION, HIGH CEILING OUTDOOR APPLICATION



OVERVIEW

These Outdoor LED Canopy Light are specially manufactured to cover the large areas and it can be widely used in Gas stations, industrial areas, residential areas, Outdoor Canopies , & high ceiling.

FEATURES

- ✓ UL DLC certified
- ✓ IP65 driver,input voltage 100-277VAC
- ✓ No UV or IR in the beam
- ✓ Easy to install and operate
- ✓ Light is soft and uniform, safe to eyes.
- ✓ Instant start, NO flickering, NO humming.
- ✓ Green and eco-friendly without mercury.
- ✓ 60%~80% Energy Savings

150W



150W



30W




55W



PRODUCT SPECIFICATION

-	30W LED	55W LED	150W LED	150W LED FLAT
Power Wattage :	30W	55W	150W	150W
Kelvins	5700K	5700K	5700K	5700K
Lumens	4375LM	6875LM	19050LM	16950LM
Efficacy (Lm/Watt)	125LM/W	125LM/W	127LM/W	113LM/W
Input Voltage	100-277V	100-277V	100-277V	100-277V
IP Grade	IP65	IP65	IP65	IP65
Life Span	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours
Certification	UL/DLC	UL/DLC	UL/DLC	UL/DLC
Warranty	5 Years	5 Years	5 Years	5 Years



LED TROFFER LIGHTS

DROP CEILING APPLICATIONS

UL & DLC CERTIFIED

LED TROFFER LIGHTS

DROP CEILING APPLICATIONS



OVERVIEW

These Ceiling Troffers are at the cutting-edge of modern design and are hazardous material-free and maintenance-free. Easy installation for recessed, suspended, or surface mounted. This fixture can be used in office buildings, hospitals, schools, kitchens and more.



PRODUCT SPECIFICATION

-	2x2 LED Panel Troffer-5000K	2x4 LED Panel Troffer-5000K
Watt	Wattage Tuneable 20W, 30W, 40W	Wattage Tuneable 40W, 50W, 60W
Size	2'x2'	2'x4'
Input Voltage:	AC 100-277Vac	AC 100-277Vac
Lumens	5000 LM	7500 LM
Kelvins	Tuneable 3000K, 4000K, 5000K	Tuneable 3000K, 4000K, 5000K
Dimmable	YES	YES
CRI	>80	>80
THD	<10%	<10%
IP Rating	IP40	IP40
Beam Angle	120°	120°
Certification	ETL/DLC	ETL/DLC
Warranty	5 Years	5 Years



LED BACKLIT PANEL LIGHTS

COMMERCIAL BUILDING, SCHOOLS

UL & DLC CERTIFIED



LED BACKLIT PANEL LIGHTS

COMMERCIAL BUILDING, SCHOOLS



OVERVIEW

These Led Panel were designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for indoor illumination at hotels, garages, commercial buildings, public spaces, schools, universities, and hospitals.



PRODUCT SPECIFICATION

-	2x2 LED Panel Light	2x4 LED Panel Light
Watt	40W	72W
Size	2'x2'	2'x4'
Input Voltage:	AC 100-277Vac	AC 100-277Vac
Lumens	5000 LM	9000 LM
Kelvins	6000K / 6500k	6000K / 6500k
Dimmable	YES	YES
CRI	>80	>80
THD	<10%	<10%
IP Rating	IP40	IP40
Beam Angle	120°	120°
Certification	ETL	ETL
Warranty	3 Years	3 Years

LED BACKLIT PANEL LIGHTS

COMMERCIAL BUILDING, SCHOOLS



OVERVIEW

These Led Panel were designed and engineered as maintenance free, energy-contamination of the night sky, while providing highly effective delivered lumens for indoor illumination at hotels, garages, commercial buildings, public spaces, schools, universities, and hospitals.



PRODUCT SPECIFICATION

-	2x2 LED Panel Light-CCT	2x4 LED Panel Light-CCT	1x4 LED Panel Light-CCT
Watt	20W/30W/40W	40W/50W/60W	50W
Size	2'x2'	2'x4'	1'x4'
Input Voltage:	AC 100-277Vac	AC 100-277Vac	AC 100-277Vac
Lumens	2500-5000 LM	5000-7500 LM	6250 LM
Kelvins	3000K/4000K/5000K CCT	3000K/4000K/5000K CCT	5000K & 6000K
Dimmable	YES	YES	YES
CRI	>80	>80	>80
THD	<10%	<10%	<10%
IP Rating	IP40	IP40	IP40
Beam Angle	120°	120°	120°
Certification	ETL/DLC	ETL/DLC	ETL/DLC
Warranty	5 Years	5 Years	3 Years & 5 Years



A19 & A21 LED BULBS

KITCHEN / DRAWING ROOM / OFFICES

UL & DLC CERTIFIED



A19 & A21 LED BULB

KITCHEN / DRAWING ROOM / OFFICES



OVERVIEW

The lumen output of this A19 bulb is 750LM ,Available in 3000K & 5000K Equivalent to 60W incandescent bulb which means it saves around 85% in electricity bill , its a E26/E27 base ,UL certified with 1 Year of warranty.



PRODUCT SPECIFICATION

-	A19 9W LED Bulb	A19 9W GU24 LED Bulb
Specification	A19 9W LED Bulb	A19 9W GU24 LED Bulb
Watt	9W	9W
Bulb Size	A19	A19
Input Voltage:	120V AC	120V AC
Lumens	750 LM	750 LM
Kelvins	3000K & 5000K	3000K & 5000K
Dimmable	YES	YES
CRI	>80	>80
Base Type	E26/E27	GU24
Life	30000 Hours	30000 Hours
Certification	UL	UL
Warranty	1 Year	1 Year



PAR LED BULBS
KITCHEN / DRAWING ROOM / OFFICES

UL & DLC CERTIFIED

PAR LED BULBS

KITCHEN / DRAWING ROOM / OFFICES


OVERVIEW

PAR (short for Parabolic Aluminized Reflector) bulbs are lamps with "spot light" features, meaning that they provide a beam spread that is typically lower than 45°. Use PAR bulbs when attempting to put a focused beam of light on an object such as in track lighting or illuminating artwork.



PRODUCT SPECIFICATION

-	PAR20 10W	PAR30 12W	PAR38 20W
Specification	PAR20 10W LED Light Bulb	PAR30 12W LED Light Bulb	PAR38 20W LED Light Bulb
Watt	8W	12W	20W
Bulb Size	PAR20	PAR30	PAR38
Input Voltage:	120V AC	120V AC	120V AC
Lumens	608 LM	840 LM	1675 LM
Kelvins	3000K & 5000K & 6000K	3000K & 5000K & 6000K	3000K & 5000K & 6000K
Dimmable	NO	NO	NO
CRI	>83	>83	>83
Base Type	E26/E27	E26/E27	E26/E27
Life	30000 Hours	30000 Hours	30000 Hours
Certification	Energy Star	Energy Star	Energy Star
Warranty	1 Year	1 Year	1 Year



BR LED BULBS

KITCHEN / DRAWING ROOM / OFFICES

UL & DLC CERTIFIED



BR LED BULBS

KITCHEN / DRAWING ROOM / OFFICES


OVERVIEW

LEDS BR40 17W is a replacement of 95W MH bulb and gives out around 1400 Lumens of brightness and also available in 3000K 4000K & 5000K ETL or Energy star listed with 1 year of warranty.



PRODUCT SPECIFICATION

-	BR30 10W	BR40 20W
Specification	BR30 10W LED Light Bulb	BR40 20W LED Light Bulb
Watt	10W	20W
Bulb Size	BR30	BR40
Input Voltage:	120V AC	120V AC
Lumens	750 LM	750 LM
Kelvins	3000K & 5000K	3000K & 5000K
Dimmable	YES	YES
CRI	>80	>80
Base Type	E26/E27	GU24
Life	30000 Hours	30000 Hours
Certification	UL	UL
Warranty	1 Year	1 Year



GU10 AND MR16 BULBS

GALLERY / DECORATION / OFFICES

UL & DLC CERTIFIED



GU10 AND MR16 BULBS

GALLERY / DECORATION / OFFICES

OVERVIEW

LEDs GU10 and the MR16 are the main two spotlights used in the home today. ... The main difference is that the GU10 bulb will run at 240 volts (which is the same voltage as supplied by the mains power supply), while MR16 bulbs run on just 12 volts.



PRODUCT SPECIFICATION

-	GU10 5W	MR16 12V 5W
Specification	GU10 5W LED BULB	MR16 12V 5W LED BULB
Watt	5W	12W
Bulb Size	GU10	PAR30
Input Voltage:	100-240V	120V AC
Lumens	400 LMS	840 LM
Kelvins	3000K & 5000K	3000K & 5000K & 6000K
Dimmable	NO	NO
Beam Angle	60 Degrees	>83
Base Type	GU10	E26/E27
Life	30000 Hours	30000 Hours
Certification	UL	Energy Star
Warranty	1 Year	1 Year



LED BOLLARDS

GARDEN / BACKYARD / FOOTPATH

UL & DLC CERTIFIED



LED BOLLARDS

GARDEN / BACKYARD / FOOTPATH




OVERVIEW

A short post designed to either identify or mark a location is known as a bollard. These signs are used to guide traffic or protect sensitive areas. Bollards provide effective and efficient visual barriers for both pedestrian and vehicular traffic.



PRODUCT SPECIFICATION

-	2x2 LED Panel Light-CCT	2x4 LED Panel Light-CCT	1x4 LED Panel Light-CCT
Specification	FLAT HEAD BOLLARD 20W	FLAT HEAD BOLLARD 10W	FLAT HEAD BOLLARD 10W
Size	7" L x 7" W x 41" H	7" L x 7" W x 41" H	7" L x 7" W x 41" H
Watts	20W	10W	10W
Lumens	1400 LMS	800 LMS	800 LMS
Kelvins	3000K + 4000K +5000K	3000K + 4000K +5000K	3000K + 4000K +5000K
Voltage	AC100-277	AC100-277	AC100-277
Dimmable	NO	NO	NO
Beam Angle	360 DEGREES	360 DEGREES	360 DEGREES
CRI	>70	>80	>80
PF	>0.9	>0.5	>0.5
IP Rate	IP65	IP65	IP65
Material	ALUMINIUM PC	ALUMINIUM PC	ALUMINIUM PC
Housing Color	BRONZE	BRONZE, BLACK	BRONZE, BLACK
Lifespan	50,000 HOURS	30,000 HOURS	30,000 HOURS

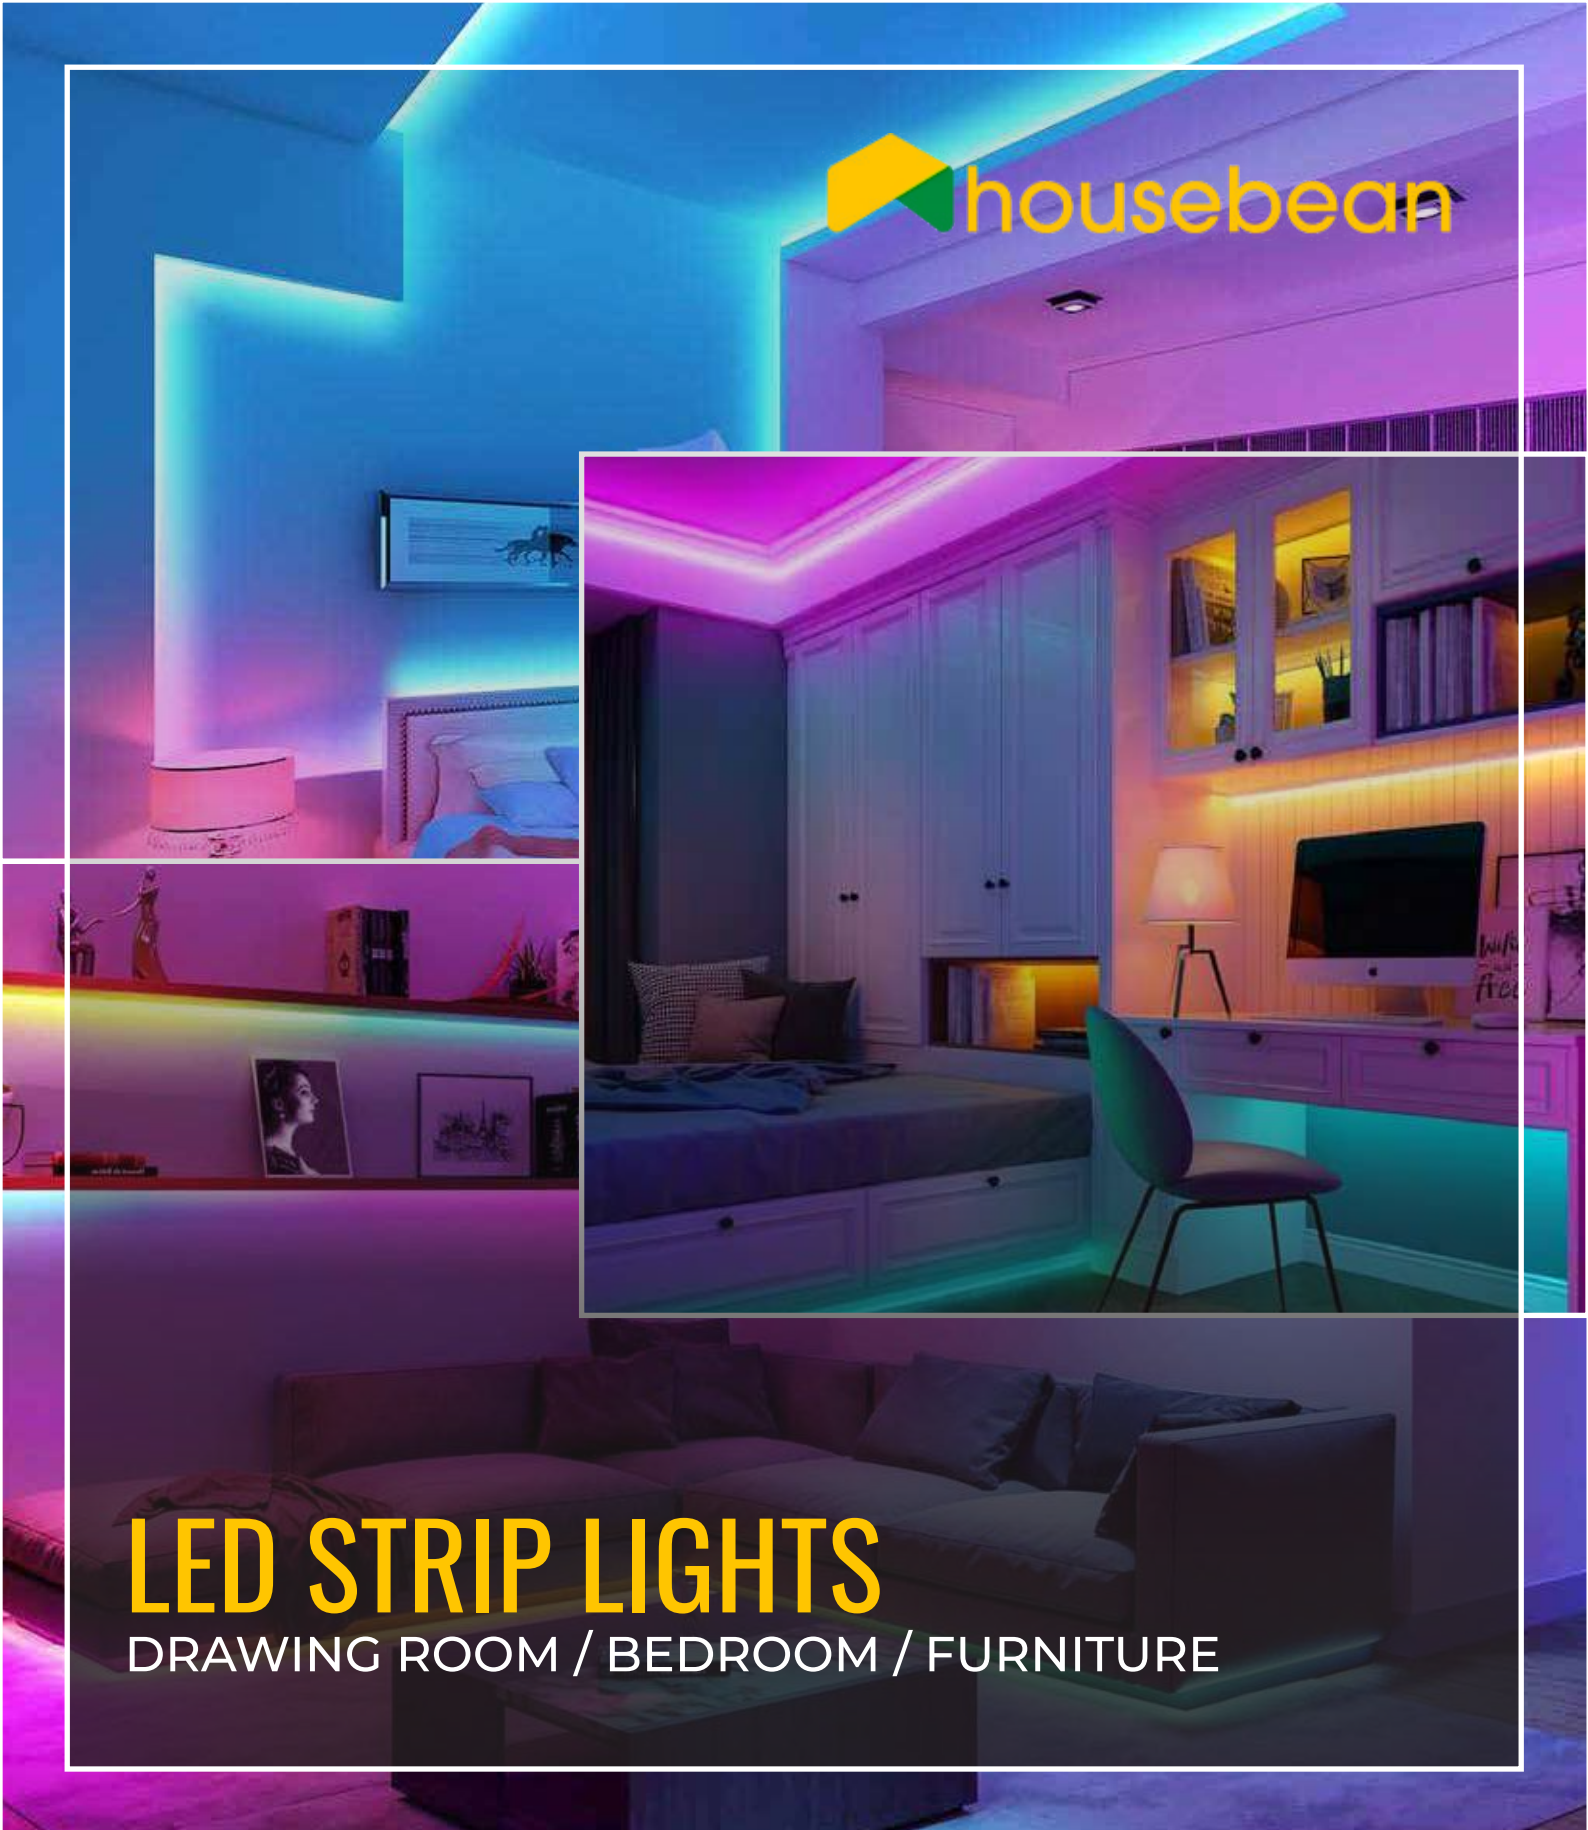

LED STRIP LIGHTS

DRAWING ROOM / BEDROOM / FURNITURE

UL & DLC CERTIFIED

LED STRIP LIGHTS

ROOM CEILINGS / FLASH BACKLIT /
UNDER CABINET STRIPS



PRODUCT SPECIFICATION

	5050 60 LED STRIP LIGHT Non-Weatherproof	5050 60 LED STRIP LIGHT Weatherproof	5050 60 LED RGB STRIP LIGHT Weatherproof-16FT PACK	5050 60 LED RGB CHASING STRIP LIGHT Weatherproof-16FT PACK
LED Color/Kelvins	3000K,4000K,5000K,6000K Red Green,Blue ,CCT,RGB	3000K,4000K,5000K,6000K, Red Green,Blue ,CCT,RGB	RGB	RGB CHASING
Quantity Of LED	60 LED/M	60 LED/M	60 LED/M	60 LED/M
Input Voltage	12V/24V	12V/24V	12V	12V
Watts	4.3W/FT 14.4W/M	4.3W/FT 14.4W/M	4.3W/FT 14.4W/M	4.3W/FT 14.4W/M
CRI	80+	80+	80+	80+
Cuttable	YES Every 1.98"	YES Every 1.98"	YES Every 1.98"	YES Every 1.98"
Lumens	200-270 Lumens/FT	200-270 Lumens/FT	175 Lumens/FT	175 Lumens/FT
LED Width	10MM	10MM	10MM	10MM
DIMMABLE	yes	yes	-	-
IP RATE	Non Weatherproof IP20	Weatherproof IP65	Weatherproof IP65	Weatherproof IP65
LED Chip	5050	5050	5050	5050
PCB Color	White	White	White	White /BLACK
Lenght	25ft (7.5 M)	16.4ft (5 M)	16.4ft (5 M) & 30FT (10 M)	16.4ft (5 M) & 30FT (10 M)
Mounting Method	Adhesive Backing	Adhesive Backing	Adhesive Backing	Adhesive Backing
LIFESPAN	50,000 HOURS	50,000 HOURS	50,000 HOURS	50,000 HOURS
Accessories	Non	Non	RGB Mini RF Controller & 6-10AMPS 12V Power Supply	Non
Certification	UL Listed	UL Listed	UL Listed	UL Listed

